

NLPN, NGPN and NPPN Series Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:

Class I, Division 1 and 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

Class I, Zone 1, Group IIB +H₂

NEMA 4, 4X, 7BCD, 9EFG

Applications

- Distribution panelboards are used to furnish protection and control of electrical equipment in hazardous locations. These compact units provide a centrally controlled switching system for large quantities of branch circuits for:
 - Lighting
 - Heating
 - Small motors
 - Similar electrical equipment

Features

- Breaker operators included as standard.
- O-ring gasket insures watertight integrity.
- Permits selection of 1-, 2- or 3-pole breakers.
- Precision machined flame path between body and cover.
- Slotted mounting feet.
- Breaker operators can be padlocked in the ON or OFF position.
- All panelboards are supplied with Cutler-Hammer + standard Quicklag® breakers.
- Chassis assemblies with mains at top (bottom optional).
- For standard outlets, see outline dimensions. For custom outlets, contact your local representative.
- Provisions for 12, 18, 24, 30, 36 and 42 circuit 1-pole chassis.
- 100 Amp or 225 Amp main lug.
- Up to 100 Amp backfed main breaker available with main lug chassis.
- Up to 225 Amp main breaker available with main breaker chassis.
- Factory installed ground and neutral bar as standard.

Standard Materials

- Bodies and covers: copperfree (4/10 of 1% max.) aluminum
- Cover bolts: Quad-Lead®, captive, stainless steel
- Breaker operators: copperfree (4/10 of 1% max.) aluminum
- Hinges: stainless steel
- Bus bars: copper
- O-ring: neoprene

Standard Finishes

- Corrosion resistant gray epoxy powder coat to provide NEMA 4X rating

Options

Must be listed in alphanumeric sequence at the end of the catalog number.

- Panel Options
 - Breather, NEMA 4X, 7 and 9, add suffix —**BR**.
 - Drain, NEMA 4X, 7 and 9, add suffix —**DN**.
 - Phenolic nameplate (specify legend), add suffix —**NP**.
 - For +50 °C (+122 °F) breaker rating, add suffix —**V**.
- Main Breaker Options NLPN and NPPN Only
 - Auxiliary switch (1A or 1B), add suffix —**AS1**.
 - Auxiliary switch (2A or 2B), add suffix —**AS2**.
 - Main breaker located at bottom, add suffix —**LB**.
 - Shunt trip (specify voltage), add suffix —**ST**.
 - Under voltage release (specify voltage), add suffix —**UV**.



NLPN

NPPN



NGPN shown with MB and INV options

- Branch Breaker Option NLPN and NGPN Only
 - Equipment Protection Devices (1- or 2-Pole -30 mA sensitivity) ① add suffix —**EPD**.
 - Ground Fault Interrupter (1- or 2-Pole -5 mA sensitivity), ① add suffix —**GFI**.
 - GFI Indicating Light, add suffix —**L5**.
- Branch Breaker Options NPPN F-Frame Only
 - Auxiliary switch (1A or 1B), add suffix —**AS1**.
 - Auxiliary switch (2A or 2B), add suffix —**AS2**.
 - Shunt trip (specify voltage), add suffix —**ST**.
 - Under voltage release (specify voltage), add suffix —**UV**.

NEC Certifications and Compliances

- UL Standard: UL 1203
- UL Listed: E84577

① GFI Push-to-Test Buttons are standard with GFI or EPD options.

+ Cutler-Hammer is a trademark of the Eaton Corporation.

NLPN Series Lighting Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:

Class I, Division 1 and 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

Class I, Zone 1, Group IIB +H₂

NEMA 4, 4X, 7BCD, 9EFG

Select branch breakers as desired in panel. First and second digits are the quantity of breakers, third and fourth digits are ampere rating, the fifth digit is number of poles. Example: An 18-circuit 120/240 V 1-phase 3-wire 100 Amp MLO panel with 12 1-pole 20 Amp and 3 2-pole 30 Amp branch breakers should read NLPNB11A18ML100-10501GFI.

Catalog Numbering Guide

NLPN	B	1	1	A	18	MB	100	10	50	1	GFI		▲
Duty: O-Z/Gedney Non-Factory Sealed Lighting Panel			Voltage: 1 - 120/240 Vac 2 - 120/208 Vac 5 - 240 Vac 7 - 24 Vdc			Main Type: MB - Main Breaker ML - Main Lug Only			Ampere Rating ①: 10 - 10AT 15 - 15AT 20 - 20AT 25 - 25AT 30 - 30AT 35 - 35AT 40 - 40AT 45 - 45AT 50 - 50AT 55 - 55AT 60 - 60AT 70 - 70AT 80 - 80AT (not for 1-Pole) 90 - 90AT (not for 1-Pole) 100 - 100AT			Additional Branch Breakers: Repeat Step ①	
Panel Size: A - 12 Circuit, 100 Amp Main Lug Only B - 18 Circuit, 100 Amp Main Lug Only C - 30 Circuit, 100 or 225 Amp Main Lug Only or 18 Circuit with Main Breaker D - 42 Circuit, 225 Amp Main Lug Only or 36 Circuit with Main Breaker F - 42 Circuit with Main Breaker			Wire System: A - 1P, 3W B - 3P, 3W for 240 Vac C - 3P, 4W D - 2P, 2W for 24 Vdc			Ampere Rating: 020 - 20AT 025 - 25AT 030 - 30AT 040 - 40AT 050 - 50AT 060 - 60AT 070 - 70AT 080 - 80AT 090 - 90AT 100 - 100AT 110 - 110AT 125 - 125AT 150 - 150AT 175 - 175AT 200 - 200AT 225 - 225AT			No. of Poles ①: <i>(include only if different from wiring system)</i>			Suffix for Other Options/ Features: Must be listed in alphanumeric sequence <i>(See Options)</i>	
		Current Rating: 1 - 100 Amp 2 - 225 Amp			Number of Circuits: 12 18 24 30 36 42		Quantity of Branch Breakers ①: 1 thru 42			Breaker Type ①: Normal Duty (Leave Blank) EPD GFI HID			

DISTRIBUTION EQUIPMENT: NEC/CEC HAZARDOUS LOCATION SWITCHES

OZGEDNEY

▲ To complete the catalog number please add the appropriate suffix for other options/features. These suffixes can be found under Options.

Visit our website at www.emerson.com or contact us at (800) 621-1506.

© March 2017

NLPN Series Lighting Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed


NEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Class I, Zone 1, Group IIB +H₂
 NEMA 4, 4X, 7BCD, 9EFG

	Number of Circuits	120/240V 1-Phase 3-Wire BAB Type	120/208V 3-Phase 4-Wire BAB Type	240V 3-Phase 3-Wire Delta BAB Type	Panel Size	Approximate Weight kgs (lbs)
100 Amp Main Lug Only	12	NLPNA11A12ML ▲	NLPNA12C12ML ▲	NLPNA15B12ML ▲	A	61.23 (135)
	18	NLPNB11A18ML ▲	NLPNB12C18ML ▲	NLPNB15B18ML ▲	B	74.84 (165)
	24	NLPNC11A24ML ▲	NLPNC12C24ML ▲	NLPNC15B24ML ▲	C	95.25 (210)
	30	NLPNC11A30ML ▲	NLPNC12C30ML ▲	NLPNC15B30ML ▲	C	97.52 (215)
225 Amp Main Lug Only	18	NLPNC21A18ML ▲	NLPNC22C18ML ▲	NLPNC25B18ML ▲	C	81.65 (180)
	24	NLPNC21A24ML ▲	NLPNC22C24ML ▲	NLPNC25B24ML ▲	C	104.33 (230)
	30	NLPNC21A30ML ▲	NLPNC22C30ML ▲	NLPNC25B30ML ▲	C	106.59 (235)
	36	NLPND21A36ML ▲	NLPND22C36ML ▲	NLPND25B36ML ▲	D	131.54 (290)
	42	NLPND21A42ML ▲	NLPND22C42ML ▲	NLPND25B42ML ▲	D	133.81 (295)
Main Breaker 100 Amp F	12	NLPNC11A12MB100 ▲	NLPNC12C12MB100 ▲	NLPNC15B12MB100 ▲	C	74.84 (165)
	18	NLPNC11A18MB100 ▲	NLPNC12C18MB100 ▲	NLPNC15B18MB100 ▲	C	81.65 (180)
	24	NLPND11A24MB100 ▲	NLPND12C24MB100 ▲	NLPND15B24MB100 ▲	D	95.25 (210)
	30	NLPND11A30MB100 ▲	NLPND12C30MB100 ▲	NLPND15B30MB100 ▲	D	142.88 (315)
Main Breaker 225 Amp F	18	NLPNC21A18MB225 ▲	NLPNC22C18MB225 ▲	NLPNC25B18MB225 ▲	C	83.91 (185)
	24	NLPND21A24MB225 ▲	NLPND22C24MB225 ▲	NLPND25B24MB225 ▲	D	133.81 (295)
	30	NLPND21A30MB225 ▲	NLPND22C30MB225 ▲	NLPND25B30MB225 ▲	D	136.08 (300)
	36	NLPND21A36MB225 ▲	NLPND22C36MB225 ▲	NLPND25B36MB225 ▲	D	138.35 (305)
	42	NLPNF21A42MB225 ▲	NLPNF22C42MB225 ▲	NLPNF25B42MB225 ▲	F	156.49 (345)


Note: For Back Fed main, replace **ML**, **MB100**, or **MB225** in part number with **BF**. For 400 Amp Main Lug, contact your local representative. Standard interrupting capacity is 10,000 AIC. For higher interrupt ratings, contact your local representative.

Typical Panelboard Wiring Diagram

1-Phase, 3-Wire Systems

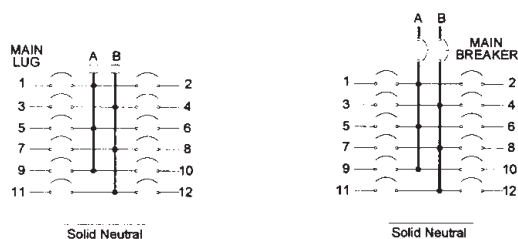

3-Phase, 4-Wire Systems

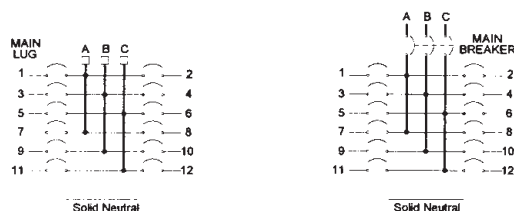

▲ To complete the catalog number please add the appropriate suffix for other options/features. These suffixes can be found under Options.

Visit our website at www.emerson.com or contact us at (800) 621-1506.

© March 2017

NGPN Series Ground Fault Interrupting Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:

Class I, Division 1 and 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

Class I, Zone 1, Group IIB +H₂

NEMA 4, 4X, 7BCD, 9EFG

Select branch breakers as desired in panel. First and second digits are the quantity of breakers, third and fourth digits are ampere rating, the fifth digit is number of poles. Example: An 18 circuit 120/240 V 1-phase 3-wire 100 Amp MLO panel with 12 1-pole 20 Amp 30 ma GFI and 3 2-pole 30 Amp 5 ma GFI branch breakers should read NGPNB11A18ML-12201EPD-03302GFI.

Catalog Numbering Guide


NGPN	B	1	1	A	18	ML	12	20	1	EFD	▲
Duty: O-Z/Gedney Non-Factory Sealed GFI Panel			Voltage: 1 - 120/240 2 - 120/208			Main Type: ML - Main Lug Only			No. of Poles ①: 1 - 1-Pole 2 - 2-Pole		Suffix for Other Options/ Features: Must be listed in alphanumeric sequence (See Options)
Panel Size: AA - 6 Circuit A - 12 Circuit B - 18 Circuit C - 24 Circuit				Wire System: A - 1P 3W C - 3P, 4W			Quantity of Branch Breakers ①: 1 thru 24			Breaker Type ①: Normal Duty (Leave Blank) EPD GFI	
		Current Rating: 1 - 100 Amp			Number of Circuits: 4 6 12 18 24			Ampere Rating ①: 15 - 15AT 20 - 20AT 25 - 25AT 30 - 30AT 40 - 40AT 50 - 50AT (2-Pole Only)		Additional Branch Breakers: Repeat Step ①	

	Number of Circuits	120/240 V 1-Phase 3-Wire	120/280 V 3-Phase 4-Wire	Panel Size	Approximate Weight kgs (lbs)
100 Amp Main Lug Only	4	NGPNA11A04ML ▲	NGPNA12C04ML ▲	AA	13.61 (30)
	6	NGPNA11A06ML ▲	NGPNA12C06ML ▲	AA	15.88 (35)
	12	NGPNA11A12ML ▲	NGPNA12C12ML ▲	A	61.23 (135)
	18	NGPNB11A18ML ▲	NGPNB12C18ML ▲	B	74.84 (165)
	24	NGPNC11A24ML ▲	NGPNC12C24ML ▲	C	95.25 (210)


Note: For Back Fed main, replace last **ML** in part number with **BF**. For 100 Amp Main Breaker, contact your local representative. Standard interrupting capacity is 10,000 AIC. For higher interrupt ratings, contact your local representative.

Typical Panelboard Wiring Diagram

1-Phase, 3-Wire Systems



3-Phase, 4-Wire Systems



▲ To complete the catalog number please add the appropriate suffix for other options/features. These suffixes can be found under Options.

NPPN Series Power Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

GHB Cutler-Hammer + Circuit Breakers

NEC:

Class I, Division 1 and 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

Class I, Zone 1, Group IIB +H₂

NEMA 4, 4X, 7BCD, 9EFG

Select GHB + branch breakers as desired in panel. First and second digits are the quantity of breakers, third and fourth digits are ampere rating, the fifth digit is number of poles. Example: An 18-circuit 277/480 V 3-phase 4-wire 100 A MLO panel with 12 1-pole 20 Amp and 3 2-pole 30 Amp branch breakers should read NPPNB14C18ML100-12201EPD-03302.

Catalog Numbering Guide

NPPN	B	1	4	C	18	ML	100	12	20	1	EPD		▲
Duty: O-Z/Gedney Non-Factory Sealed Power Panel			Voltage: 4 - 277/480 (3P 4W Only) 7 - 24 Vdc 8 - 125/250 Vdc			Main Type: MB - Main Breaker ML - Main Lug Only			Ampere Rating ①: 15 - 15AT 20 - 20AT 25 - 25AT 30 - 30AT 35 - 35AT 40 - 40AT 45 - 45AT 50 - 50AT 55 - 55AT 60 - 60AT 70 - 70AT 80 - 80AT 90 - 90AT 100 - 100AT			Additional Branch Breakers: Repeat Step ①	
Panel Size: A - 12 Circuit, 100 Amp Main Lug Only B - 18 Circuit, 100 Amp Main Lug Only C - 30 Circuit, 100 or 225 Amp Main Lug Only or 18 Circuit with Main Breaker D - 42 Circuit, 225 Amp Main Lug Only or 36 Circuit with Main Breaker F - 42 Circuit with Main Breaker				Wire System: C - 3P, 4W D - 2P, 2W for 24 Vdc			Ampere Rating: 020 - 20AT 025 - 25AT 030 - 30AT 040 - 40AT 050 - 50AT 060 - 60AT 070 - 70AT 080 - 80AT 090 - 90AT 100 - 100AT 110 - 110AT 125 - 125AT 150 - 150AT 175 - 175AT 200 - 200AT 225 - 225AT			No. of Poles ①: (include only if different from wiring system)			Suffix for Other Options/ Features: Must be listed in alphanumeric sequence (See Options)
		Current Rating: 1 - 100 Amp 2 - 225 Amp			Number of Circuits: 12 18 24 30 36 42		Quantity of Branch Breakers ①: 1 thru 42			Breaker Type ①: Normal Duty (Leave Blank) EPD ①			

① EPD Single Phase (requires 2-Poles) 277 Vac, 30 mA.

▲ To complete the catalog number please add the appropriate suffix for other options/features. These suffixes can be found under Options.

+ GHB and Cutler-Hammer are trademarks of the Eaton Corporation.

Visit our website at www.emerson.com or contact us at (800) 621-1506.

© March 2017

NPPN Series Power Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

GHB Cutler-Hammer + Circuit Breakers

NEC:

Class I, Division 1 and 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

Class I, Zone 1, Group IIB +H₂



NEMA 4, 4X, 7BCD, 9EFG

	Number of Circuits	277/480 V 3-Phase 4-Wire GHB Type	Panel Size	Approximate Weight kgs (lbs)
100 Amp Main Lug Only	12	NPPNA14C12ML ▲	A	61.23 (135)
	18	NPPNB14C18ML ▲	B	74.84 (165)
	24	NPPNC14C24ML ▲	C	95.25 (210)
	30	NPPNC14C30ML ▲	C	97.52 (215)
225 Amp Main Lug Only	18	NPPNC24C18ML ▲	C	81.65 (180)
	24	NPPNC24C24ML ▲	C	104.33 (230)
	30	NPPNC24C30ML ▲	C	106.59 (235)
	36	NPPND24C36ML ▲	D	131.54 (290)
	42	NPPND24C42ML ▲	D	133.81 (295)
Main Breaker 100 Amp F	12	NPPNC14C12MB100 ▲	C	74.84 (165)
	18	NPPNC14C18MB100 ▲	C	81.65 (180)
	24	NPPND14C24MB100 ▲	D	95.25 (210)
	30	NPPND14C30MB100 ▲	D	142.88 (315)
Main Breaker 225 Amp F	18	NPPNC24C18MB225 ▲	C	83.91 (185)
	24	NPPND24C24MB225 ▲	D	133.81 (295)
	30	NPPND24C30MB225 ▲	D	136.08 (300)
	36	NPPND24C36MB225 ▲	D	138.35 (305)
	42	NPPNF24C42MB225 ▲	F	156.49 (345)

Note: For Back Fed main, replace **ML**, **MB100**, or **MB225** in part number with **BF**. For 400 Amp Main Lug, contact your local representative. Standard interrupting capacity is 14,000 AIC. For higher interrupt ratings, contact your local representative.

Typical Panelboard Wiring Diagram

3-Phase, 4-Wire Systems



▲ To complete the catalog number please add the appropriate suffix for other options/features. These suffixes can be found under Options.

+ GHB and Cutler-Hammer are trademarks of the Eaton Corporation.

NPPN Series Power Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

F-Frame Cutler Hammer + Circuit Breakers

NEC:

Class I, Division 1 and 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

Class I, Zone 1, Group IIB +H₂

NEMA 4, 4X, 7BCD, 9EFG

Select F-Frame branch breakers as desired in panel. First and second digits are the quantity of breakers, third and fourth digits are ampere rating, the fifth digit is number of poles. Example: An 18-circuit 277/480 V 3-phase 4-wire 100 A MLO panel with 12 1-pole 20 Amp and 3 2-pole 30 Amp branch breakers should read NPPNE14C18ML100-12201-03302.

Catalog Numbering Guide

NPPN	E	1	4	C	18	ML	100	12	20	1	▲
Duty: O-Z/Gedney Non-Factory Sealed Power Panel			Voltage: 3 - 480 4 - 277/480 (3P 4W Only) 6 - 600 7 - 24 Vdc 8 - 125/250 Vdc			Main Type: MB - Main Breaker ML - Main Lug Only			Ampere Rating ①: 10 - 10AT 15 - 15AT 20 - 20AT 25 - 25AT 30 - 30AT 35 - 35AT 40 - 40AT 45 - 45AT 50 - 50AT 60 - 60AT 70 - 70AT 80 - 80AT 90 - 90AT 100 - 100AT 110 - 110AT (2-, 3-Pole Only) 125 - 125AT (2-, 3-Pole Only) 150 - 150AT (2-, 3-Pole Only) 175 - 175AT (2-, 3-Pole Only) 200 - 200AT (2-, 3-Pole Only)		Suffix for Other Options/ Features: Must be listed in alphanumeric sequence (See Options)
Panel Size: E - 12 Circuit with Main Breaker or 24 Circuit without Main Breaker G - 24 Circuit with Main Breaker or 36 Circuit without Main Breaker or H - 42 Circuit with or without Main Breaker			Wire System: B - 3P, 3W C - 3P, 4W D - 2P, 2W for 24 Vdc			Ampere Rating: 020 - 20AT 025 - 25AT 030 - 30AT 040 - 40AT 050 - 50AT 060 - 60AT 070 - 70AT 080 - 80AT 090 - 90AT 100 - 100AT 110 - 110AT 125 - 125AT 150 - 150AT 175 - 175AT 200 - 200AT 225 - 225AT		No. of Poles ①: (include only if different from wiring system)			
		Current Rating: 1 - 100 Amp 2 - 225 Amp			Number of Circuits: 12 18 24 30 36 42		Quantity of Branch Breakers ①: 1 thru 42			Additional Branch Breakers: Repeat Step ①	

▲ To complete the catalog number please add the appropriate suffix for other options/features. These suffixes can be found under Options.

+ Cutler-Hammer is a trademark of the Eaton Corporation.

Visit our website at www.emerson.com or contact us at (800) 621-1506.

© March 2017

NPPN Series Power Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

F-Frame Cutler Hammer + Circuit Breakers

NEC:

Class I, Division 1 and 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III


Class I, Zone 1, Group IIB +H₂

NEMA 4, 4X, 7BCD, 9EFG

	Number of Circuits	480 V 3-Phase 3-Wire EHD Type	277/480 V 3-Phase 3-Wire EHD Type	600 V 3-Phase 4-Wire FDB Type	Panel Size	Approximate Weight kgs (lbs)
100 Amp Main Lug Only	12	NPPNE13B12ML ▲	NPPNE14C12ML ▲	NPPNE16C12ML ▲	E	127.01 (280)
	18	NPPNE13B18ML ▲	NPPNE14C18ML ▲	NPPNE16C18ML ▲	E	129.27 (285)
	24	NPPNE13B24ML ▲	NPPNE14C24ML ▲	NPPNE16C24ML ▲	E	131.54 (290)
	30	NPPNG13B30ML ▲	NPPNG14C30ML ▲	NPPNG16C30ML ▲	G	174.63 (385)
225 Amp Main Lug Only	18	NPPNE23B18ML ▲	NPPNE24C18ML ▲	NPPNE26C18ML ▲	E	131.54 (290)
	24	NPPNG23B24ML ▲	NPPNG24C24ML ▲	NPPNG26C24ML ▲	G	176.90 (390)
	30	NPPNG23B30ML ▲	NPPNG24C30ML ▲	NPPNG26C30ML ▲	G	179.17 (395)
	36	NPPNG23B36ML ▲	NPPNG24C36ML ▲	NPPNG26C36ML ▲	G	181.44 (400)
	42	NPPNH23B42ML ▲	NPPNH24C42ML ▲	NPPNH26C42ML ▲	H	247.21 (545)
Main Breaker 100 Amp F	12	NPPNE13B12MB100 ▲	NPPNE14C12MB100 ▲	NPPNE16C12MB100 ▲	E	129.27 (285)
	18	NPPNG13B18MB100 ▲	NPPNG14C18MB100 ▲	NPPNG16C18MB100 ▲	G	176.90 (390)
	24	NPPNG13B24MB100 ▲	NPPNG14C24MB100 ▲	NPPNG16C24MB100 ▲	G	179.17 (395)
	30	NPPNG13B30MB100 ▲	NPPNG14C30MB100 ▲	NPPNG16C30MB100 ▲	G	181.44 (400)
Main Breaker 225 Amp F	18	NPPNG23B18MB225 ▲	NPPNG24C18MB225 ▲	NPPNG26C18MB225 ▲	G	179.17 (395)
	24	NPPNG23B24MB225 ▲	NPPNG24C24MB225 ▲	NPPNG26C24MB225 ▲	G	181.44 (400)
	30	NPPNH23B30MB225 ▲	NPPNH24C30MB225 ▲	NPPNH26C30MB225 ▲	H	249.48 (550)
	36	NPPNH23B36MB225 ▲	NPPNH24C36MB225 ▲	NPPNH26C36MB225 ▲	H	251.74 (555)
	42	NPPNH23B42MB225 ▲	NPPNH24C42MB225 ▲	NPPNH26C42MB225 ▲	H	254.01 (560)

Note: For Back Fed main, replace **ML**, **MB100**, or **MB225** in part number with **BF**. For 400 Amp Main Lug, contact your local representative. Standard interrupting capacity is 14,000 AIC. For higher interrupt ratings, contact your local representative.

Typical Panelboard Wiring Diagram

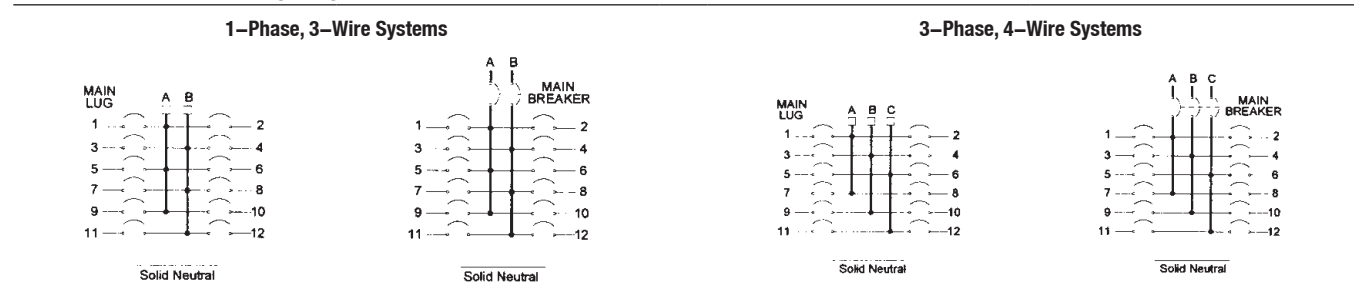

▲ To complete the catalog number please add the appropriate suffix for other options/features. These suffixes can be found under Options.







+ Cutler-Hammer is a trademark of the Eaton Corporation.

NLPN, NGPN and NPPN Series Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Class I, Zone 1, Group IIB +H₂
 NEMA 4, 4X, 7BCD, 9EFG

NLPN, NPPN Main Lug Panelboard and Mounting Hardware

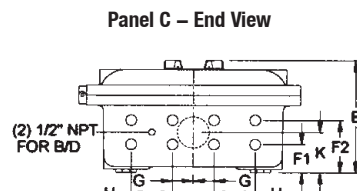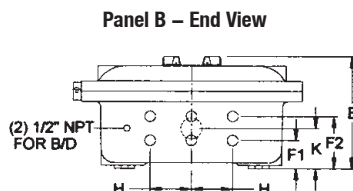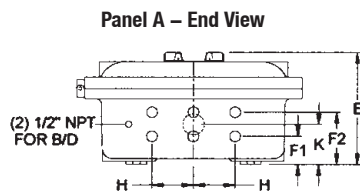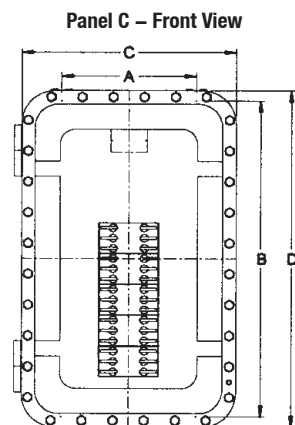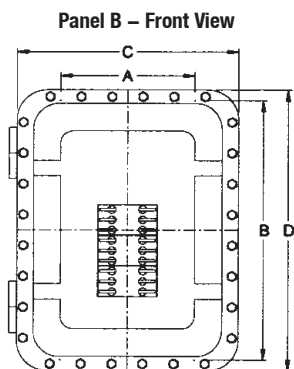

Panel Size	Mounting Dimensions in Millimeters (Inches)										Standard Top	Outlets Bottom	Mounting Hdw. Set
	A	B	C	D	E	F1	F2	G	H	K			
A	279.4 (11.00)	501.6 (19.75)	533.4 (21.00)	533.4 (21.00)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	—	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	6 - 25.4 (1.00)	NMH8
B	330.2 (13.00)	641.3 (25.25)	544.5 (21.44)	693.6 (27.31)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	—	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	6 - 25.4 (1.00)	NMH8
C	330.2 (13.00)	781.0 (30.75)	527.0 (20.75)	931.8 (32.75)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	50.8 (2.00)	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	6 - 25.4 (1.00)	NMH8

Note: All outlets are NPT.

NLPN, NGPN and NPPN Series Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:

Class I, Division 1 and 2, Groups B, C, D


Class II, Division 1 and 2, Groups E, F, G

Class III

Class I, Zone 1, Group IIB +H₂

NEMA 4, 4X, 7BCD, 9EFG

NLPN, NPPN Main Lug Panelboard and Mounting Hardware

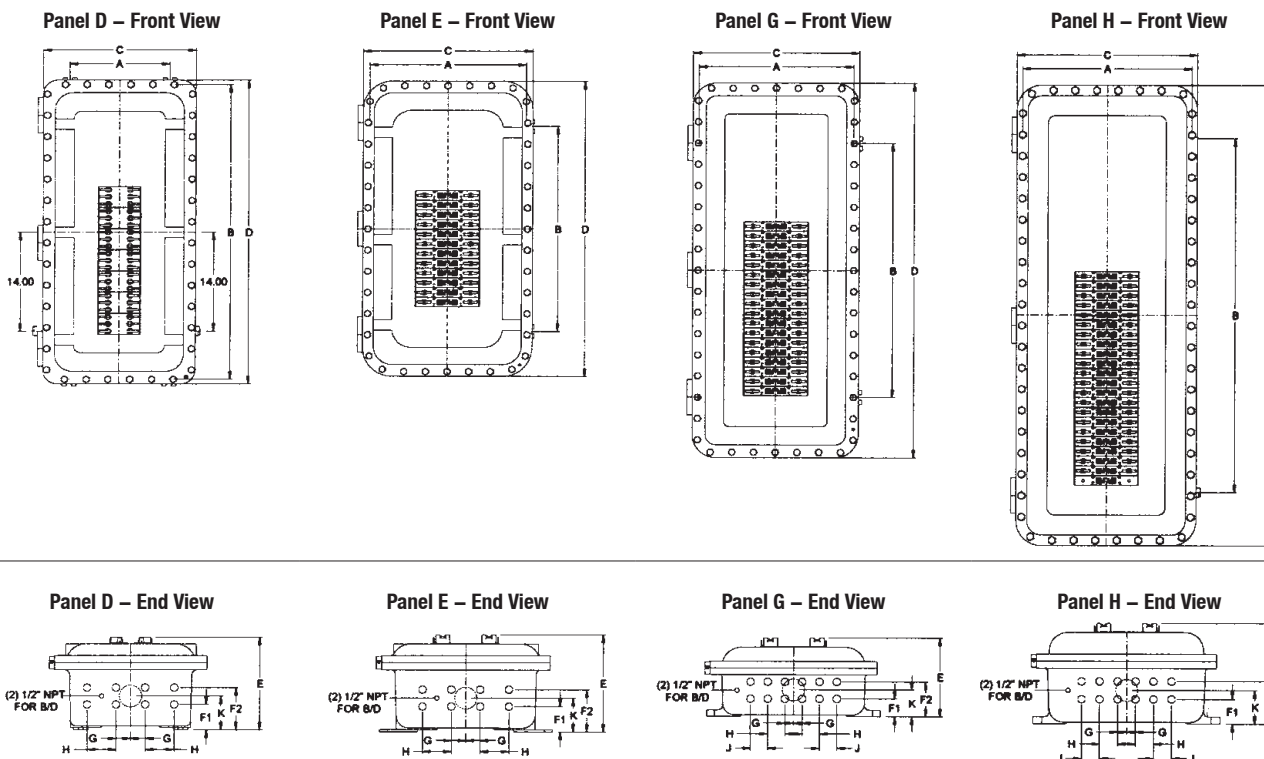

Panel Size	Mounting Dimensions in Millimeters (Inches)											Standard Top	Outlets Bottom	Mounting Hdw. Set
	A	B	C	D	E	F1	F2	G	H	J	K			
D	349.2 (13.75)	1057.4 (41.63)	533.4 (21.00)	1090.6 (42.94)	330.2 (13.00)	90.4 (3.56)	150.8 (5.94)	50.8 (2.00)	—	101.6 (4.00)	120.6 (4.75)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	NMH8
E	552.45 (21.75)	736.6 (29.00)	596.9 (23.50)	1060.4 (41.75)	346.2 (13.63)	90.4 (3.56)	150.8 (5.94)	50.8 (2.00)	—	101.6 (4.00)	120.6 (4.75)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	NMH8
G	543.0 (21.38)	914.4 (36.00)	584.2 (23.00)	1346.3 (53.00)	279.4 (11.00)	63.5 (2.50)	123.9 (4.88)	30.2 (1.19)	60.4 (2.38)	60.4 (2.38)	88.9 (3.50)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	NMH6
H	596.9 (23.50)	1270.0 (50.00)	635.0 (25.00)	1651.0 (65.00)	355.6 (14.00)	87.3 (3.44)	150.8 (5.94)	31.7 (1.25)	63.5 (2.50)	63.5 (2.50)	119.1 (4.69)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	NMH6

Note: All outlets are NPT.


NLPN, NGPN and NPPN Series Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed


NEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Class I, Zone 1, Group IIB +H₂
 NEMA 4, 4X, 7BCD, 9EFG

NLPN, NPPN Main Breaker Panelboard and Mounting Hardware


Panel C – Front View




Panel D – Front View

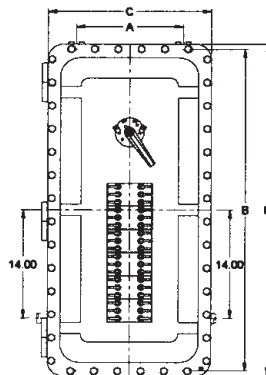


Panel E – Front View

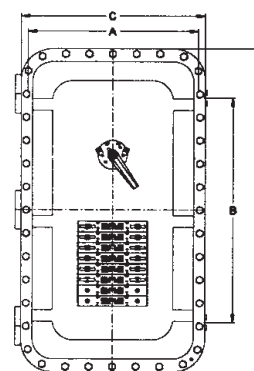


Panel C – End View



Panel D – End View



Panel E – End View



Panel Size	Mounting Dimensions in Millimeters (Inches)										Standard Top	Outlets Bottom	Mounting Hdw. Set
	A	B	C	D	E	F1	F2	G	H	K			
C	349.2 (13.75)	781.0 (30.75)	527.0 (20.75)	931.8 (32.75)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	50.8 (2.00)	101.6 (4.00)	100.0 (3.94)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	NMH8
D	349.2 (13.75)	1057.4 (41.63)	533.4 (21.00)	1090.6 (42.94)	330.2 (13.00)	90.4 (3.56)	150.8 (5.94)	50.8 (2.00)	101.6 (4.00)	120.6 (4.75)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	NMH8
E	552.45 (21.75)	736.6 (29.00)	596.9 (23.50)	1060.4 (41.75)	346.2 (13.63)	90.4 (3.56)	150.8 (5.94)	50.8 (2.00)	101.6 (4.00)	120.6 (4.75)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	NMH8

Note: All outlets are NPT.

Visit our website at www.emerson.com or contact us at (800) 621-1506.

© March 2017

NLPN, NGPN and NPPN Series Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:

Class I, Division 1 and 2, Groups B, C, D

Class II, Division 1 and 2, Groups E, F, G


Class III

Class I, Zone 1, Group IIB +H₂


NEMA 4, 4X, 7BCD, 9EFG

NLPN, NPPN Main Breaker Panelboard and Mounting Hardware


Panel F – Front View




Panel G – Front View

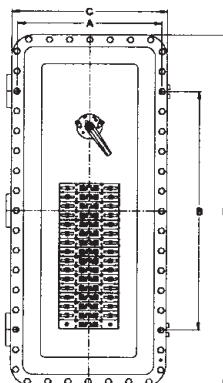


Panel H – Front View

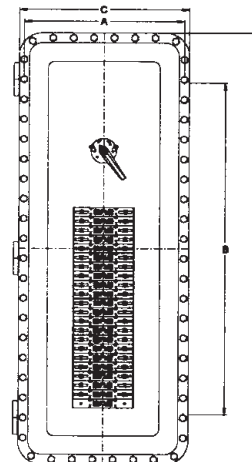


Panel F – End View



Panel G – End View



Panel H – End View



Panel Size	Mounting Dimensions in Millimeters (Inches)											Standard Top	Outlets Bottom	Mounting Hdw. Set
	A	B	C	D	E	F1	F2	G	H	J	K			
F	406.4 (16.00)	1152.6 (45.38)	603.2 (23.75)	1212.8 (47.75)	325.3 (12.81)	93.7 (3.69)	160.2 (6.31)	31.7 (1.25)	63.5 (2.50)	63.5 (2.50)	127.0 (5.00)	1 - 76.2 (3.00)	12 - 25.4 (1.00)	NMH8
G	543.0 (21.38)	914.4 (36.00)	584.2 (23.00)	1346.2 (53.00)	279.4 (11.00)	63.5 (2.50)	123.9 (4.88)	30.2 (1.19)	60.4 (2.38)	60.4 (2.38)	88.9 (3.50)	1 - 76.2 (3.00)	12 - 25.4 (1.00)	NMH6
H	596.9 (23.50)	1270.0 (50.00)	635.0 (25.00)	1651.0 (65.00)	355.6 (14.00)	87.3 (3.44)	150.8 (5.94)	31.7 (1.25)	63.5 (2.50)	63.5 (2.50)	119.1 (4.69)	1 - 76.2 (3.00)	12 - 25.4 (1.00)	NMH6

Note: All outlets are NPT.


NLPN, NGPN and NPPN Series Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed


NEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Class I, Zone 1, Group IIB +H₂
 NEMA 4, 4X, 7BCD, 9EFG

NGPN Series Ground Fault Interrupting Distribution Panelboard and Mounting Hardware


Panel AA – Front View




Panel A – Front View




Panel B – Front View




Panel C – Front View




Panel AA – End View




Panel A – End View



Panel B – End View



Panel C – End View



Panel Size	Mounting Dimensions in Millimeters (Inches)										Standard Top	Outlets Bottom	Mounting Hdw. Set
	A	B	C	D	E	F1	F2	G	H	K			
AA	184.1 (7.25)	333.5 (13.13)	352.5 (13.88)	393.7 (15.50)	242.8 (9.56)	60.4 (2.38)	—	26.9 (1.06)	54.1 (2.13)	60.4 (2.38)	1 - 25.4 (1.00)	4 - 19.0 (0.75)	NMH2
A	279.4 (11.00)	501.6 (19.75)	533.4 (21.00)	533.4 (21.00)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	—	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	6 - 25.4 (1.00)	NMH8
B	330.2 (13.00)	641.3 (25.25)	544.5 (21.44)	693.6 (27.31)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	—	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	6 - 25.4 (1.00)	NMH8
C	330.2 (13.00)	781.0 (30.75)	527.0 (20.75)	831.8 (32.75)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	50.8 (2.00)	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	8 - 25.4 (1.00)	NMH8

Note: All outlets are NPT.

