
SYM	REVISION	BY	DATE
Α	REVISED & REDRAWN	BSK	7/31/95

SCALE: ~

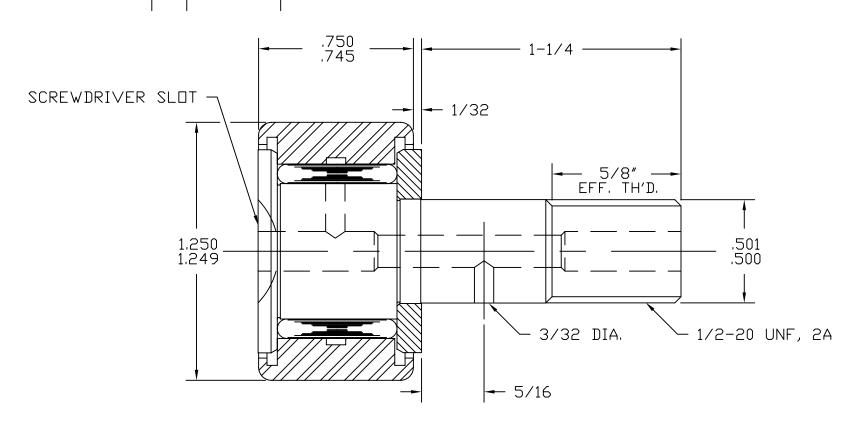

BASIC DYNAMIC CAPACITY - 3950 LBS. MAX. STATIC CAPACITY - 4250 LBS. REC. CLAMPING TORQUE - 350 IN-LBS.

MAT'L: ST'D BEARING STEELS.
BEARING PACKED WITH GENERAL PURPOSE EP GREASE.
RELUBE PROVISIONS WILL ACCEPT 3/16" DRIVE TYPE
FITTINGS, PLUGS SUPPLIED FOR UNUSED HOLES.

TOLERANCES
UNLESS OTHERWISE NOTED
FRACTIONS: ±.010 ANGLES: ±.5
2 PLACE DECIMALS (.00): ±.005
3 PLACE DECIMALS (.000): ±.002

ABC Inc.

ACCURATE BUSHING CO. INC.

Manufacturers of SMITH® Bearing Product

443 NORTH AVENUE

Garwood, NJ 07027

PART NAME STANDARD CAM FOLLOWER				
PART NO.	CR-1-1/4			
DRAWN BY	BSK	DATE	7/31/95	
CHECKED BY		FILENAME	\CRASSYS\1-1-4	