


SYM	REVISION	BY	DATE

SCALE: FULL

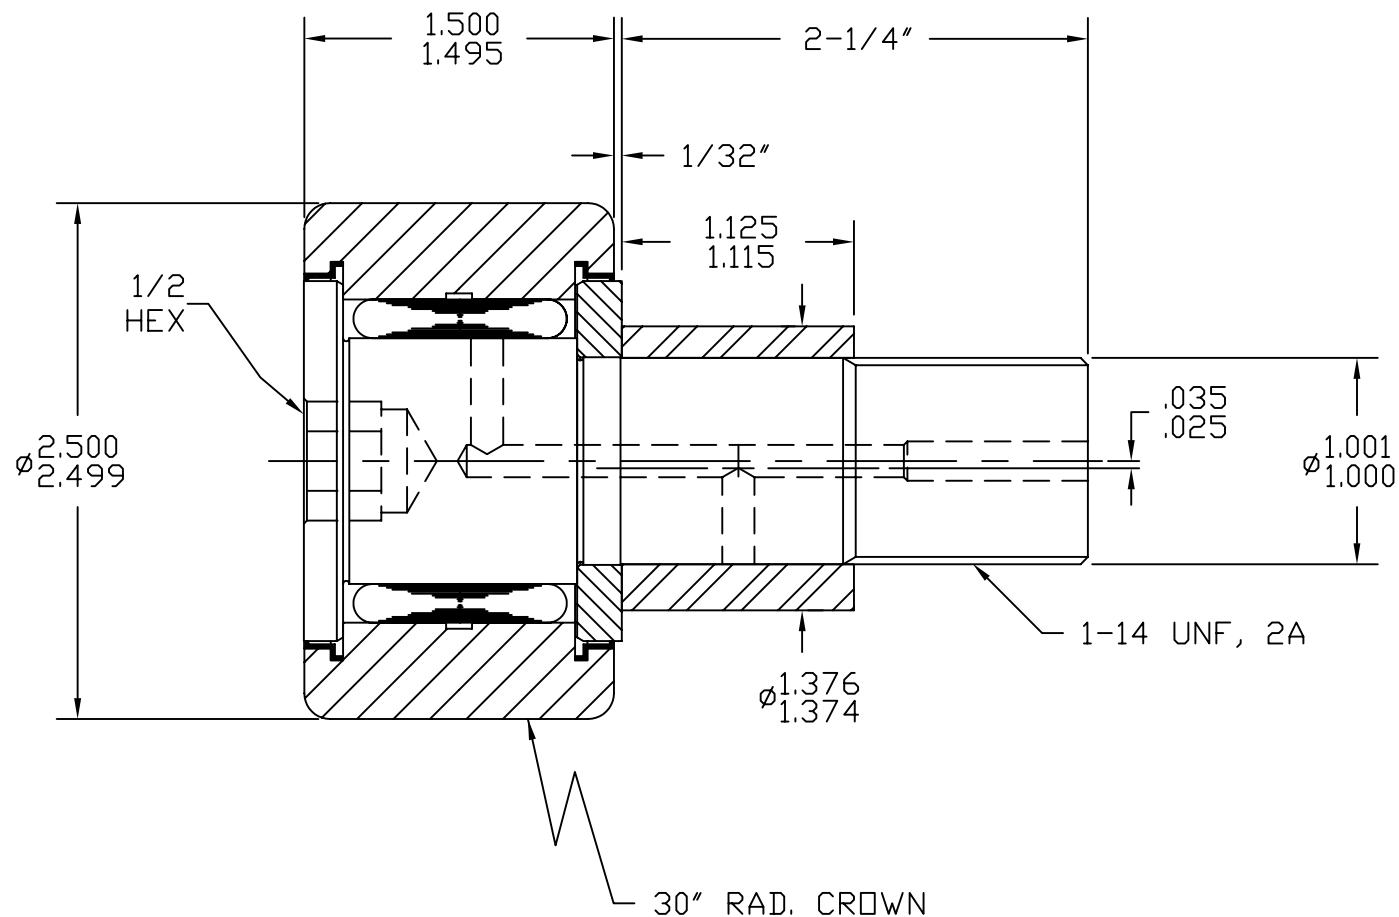

BASIC DYNAMIC CAPACITY - 15,280  
MAX. ALLOWABLE LOAD - 16,650

MAT'L: ST'D BEARING STEELS, SEALS - ACETAL.  
BEARING PACKED WITH GENERAL PURPOSE EP GREASE.  
RELUBE PROVISIONS WILL ACCEPT 3/16" DRIVE TYPE  
FITTINGS, PLUGS SUPPLIED FOR UNUSED HOLES.

#### TOLERANCES

UNLESS OTHERWISE NOTED  
FRACTIONS: ±.010 ANGLES: ±.5  
2 PLACE DECIMALS (.00): ±.005  
3 PLACE DECIMALS (.000): ±.002



**ACCURATE BUSHING CO. INC.**  
Manufacturers of SMITH® Bearing Product  
443 NORTH AVENUE  
Garwood, NJ 07027

PART NAME	STANDARD CAM FOLLOWER		
PART NO.	CR-2-1/2-XBEC		
DRAWN BY	JC	DATE	4/2/07
CHECKED BY		FILENAME	\CRASSYS\2-1-2XBEC