


| SYM | REVISION          | BY  | DATE     |
|-----|-------------------|-----|----------|
| A   | REVISED & REDRAWN | BSK | 7/24/95  |
| B   | SEE ECD0202 - 010 | CAB | 02/08/02 |

SCALE: ~

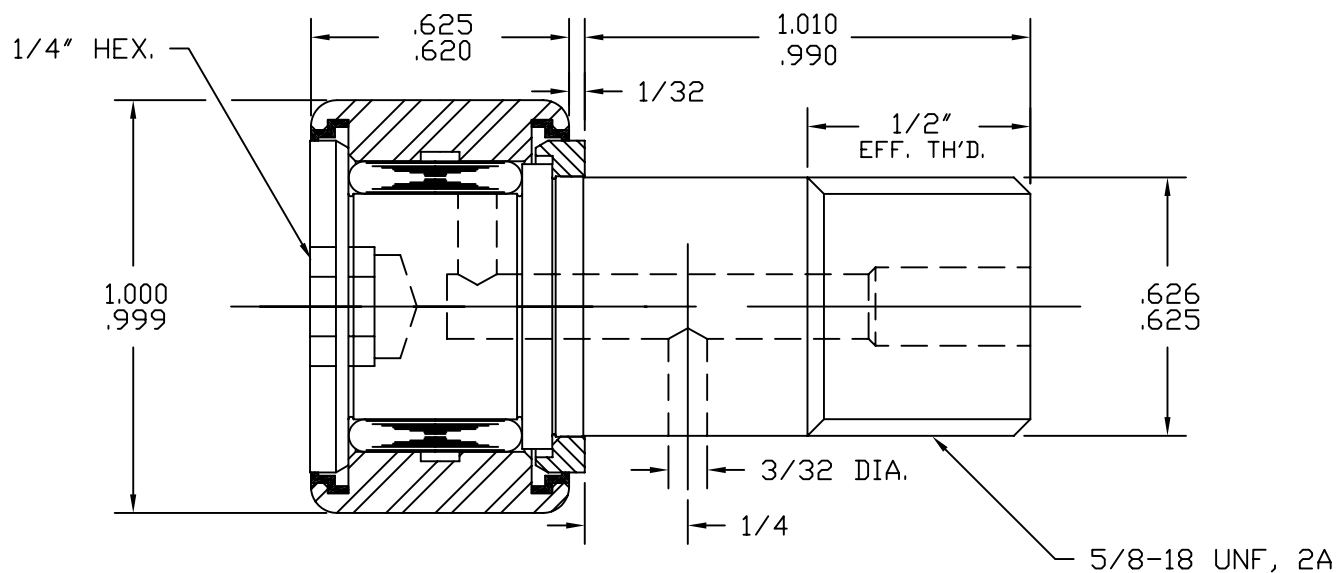

BASIC DYNAMIC CAPACITY - 2190  
MAX. ALLOWABLE LOAD - 3300

MAT'L: ST'D BEARING STEELS, SEALS-ACETAL.  
BEARING PACKED WITH GENERAL PURPOSE EP GREASE.  
RELUBE PROVISIONS WILL ACCEPT 3/16" DRIVE TYPE  
FITTINGS, PLUGS SUPPLIED FOR UNUSED HOLES.

#### TOLERANCES

UNLESS OTHERWISE NOTED  
FRACTIONS:  $\pm 0.010$  ANGLES:  $\pm 5$   
2 PLACE DECIMALS (.00):  $\pm 0.005$   
3 PLACE DECIMALS (.000):  $\pm 0.002$



**ACCURATE BUSHING CO. INC.**  
Manufacturers of SMITH® Bearing Product  
443 NORTH AVENUE  
Garwood, NJ 07027

|            |                       |          |               |
|------------|-----------------------|----------|---------------|
| PART NAME  | STANDARD CAM FOLLOWER |          |               |
| PART NO.   | HR-1-XB               |          |               |
| DRAWN BY   | BSK                   | DATE     | 7/24/95       |
| CHECKED BY |                       | FILENAME | \HRASSYS\1-XB |