


|     |          |    |      |
|-----|----------|----|------|
| SYM | REVISION | BY | DATE |
|-----|----------|----|------|

SCALE: 1.5x

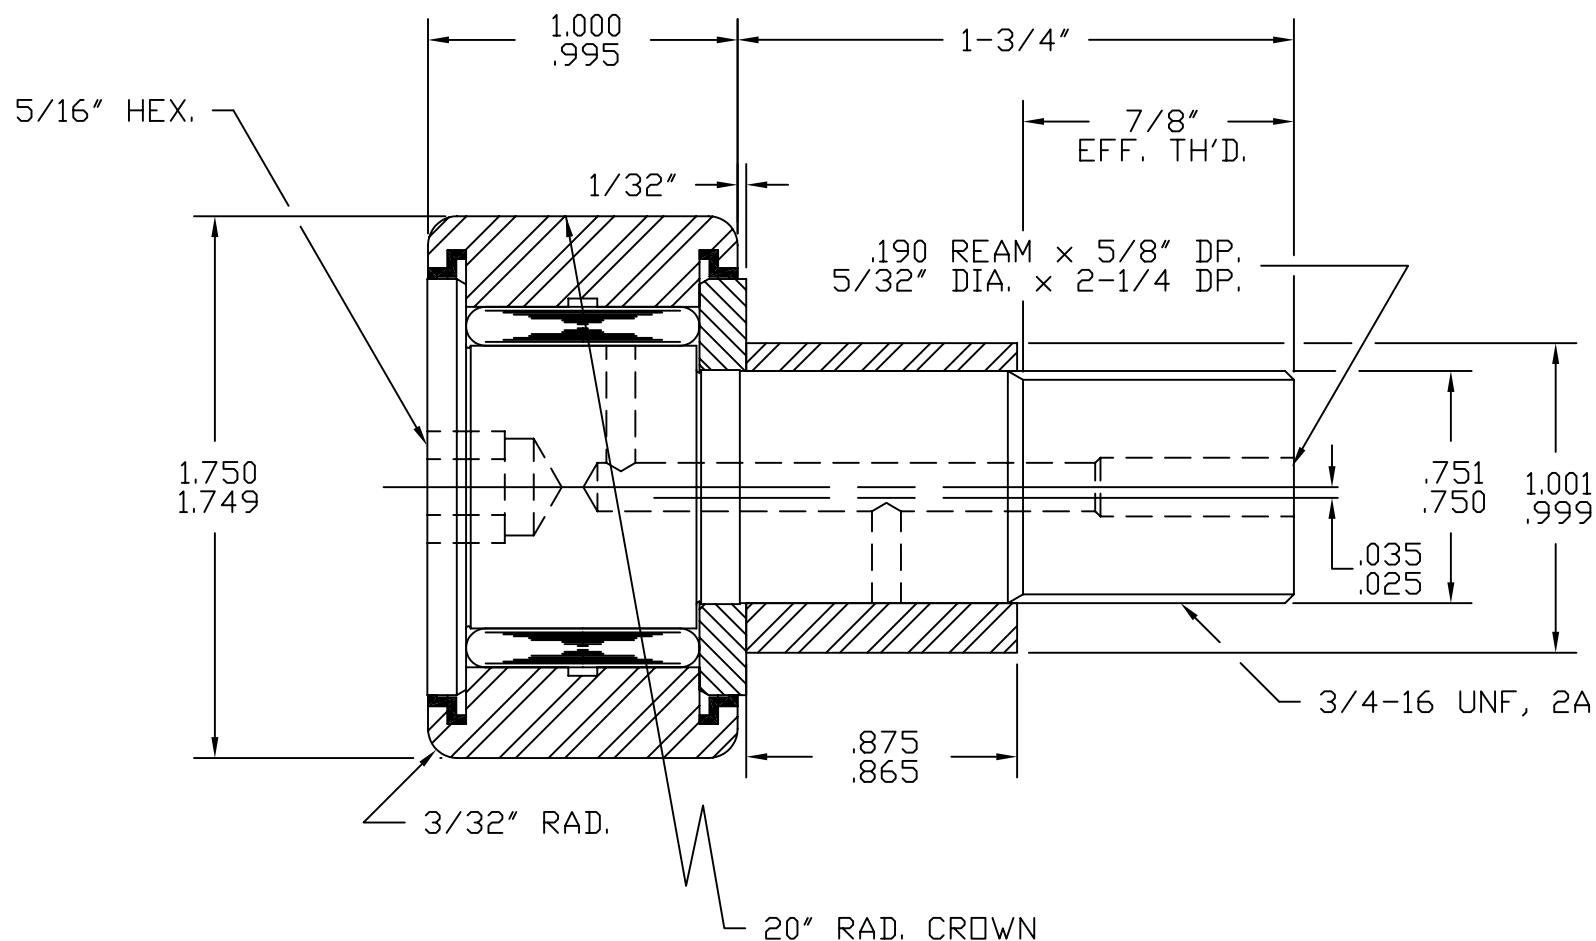

BASIC DYNAMIC CAPACITY - 6070  
MAX. ALLOWABLE LOAD - 5400

MAT'L: ST'D BEARING STEELS, SEALS - ACETAL.  
BEARING PACKED WITH GENERAL PURPOSE EP GREASE.  
RELUBE PROVISIONS WILL ACCEPT 3/16" DRIVE TYPE  
FITTINGS, PLUGS SUPPLIED FOR UNUSED HOLES.

#### TOLERANCES

UNLESS OTHERWISE NOTED  
FRACTIONS:  $\pm .010$  ANGLES:  $\pm .5$   
2 PLACE DECIMALS (.00):  $\pm .005$   
3 PLACE DECIMALS (.000):  $\pm .002$



**ACCURATE BUSHING CO. INC.**  
Manufacturers of SMITH® Bearing Product  
443 NORTH AVENUE  
Garwood, NJ 07027

|            |                       |          |                    |
|------------|-----------------------|----------|--------------------|
| PART NAME  | STANDARD CAM FOLLOWER |          |                    |
| PART NO.   | CR-1-3/4-XBEC         |          |                    |
| DRAWN BY   | JC                    | DATE     | 6/23/11            |
| CHECKED BY |                       | FILENAME | CRASSYS\1-3-4-XBEC |