


SYM	REVISION	BY	DATE
A	REVISED & REDRAWN	BSK	7/10/95

SCALE: ~

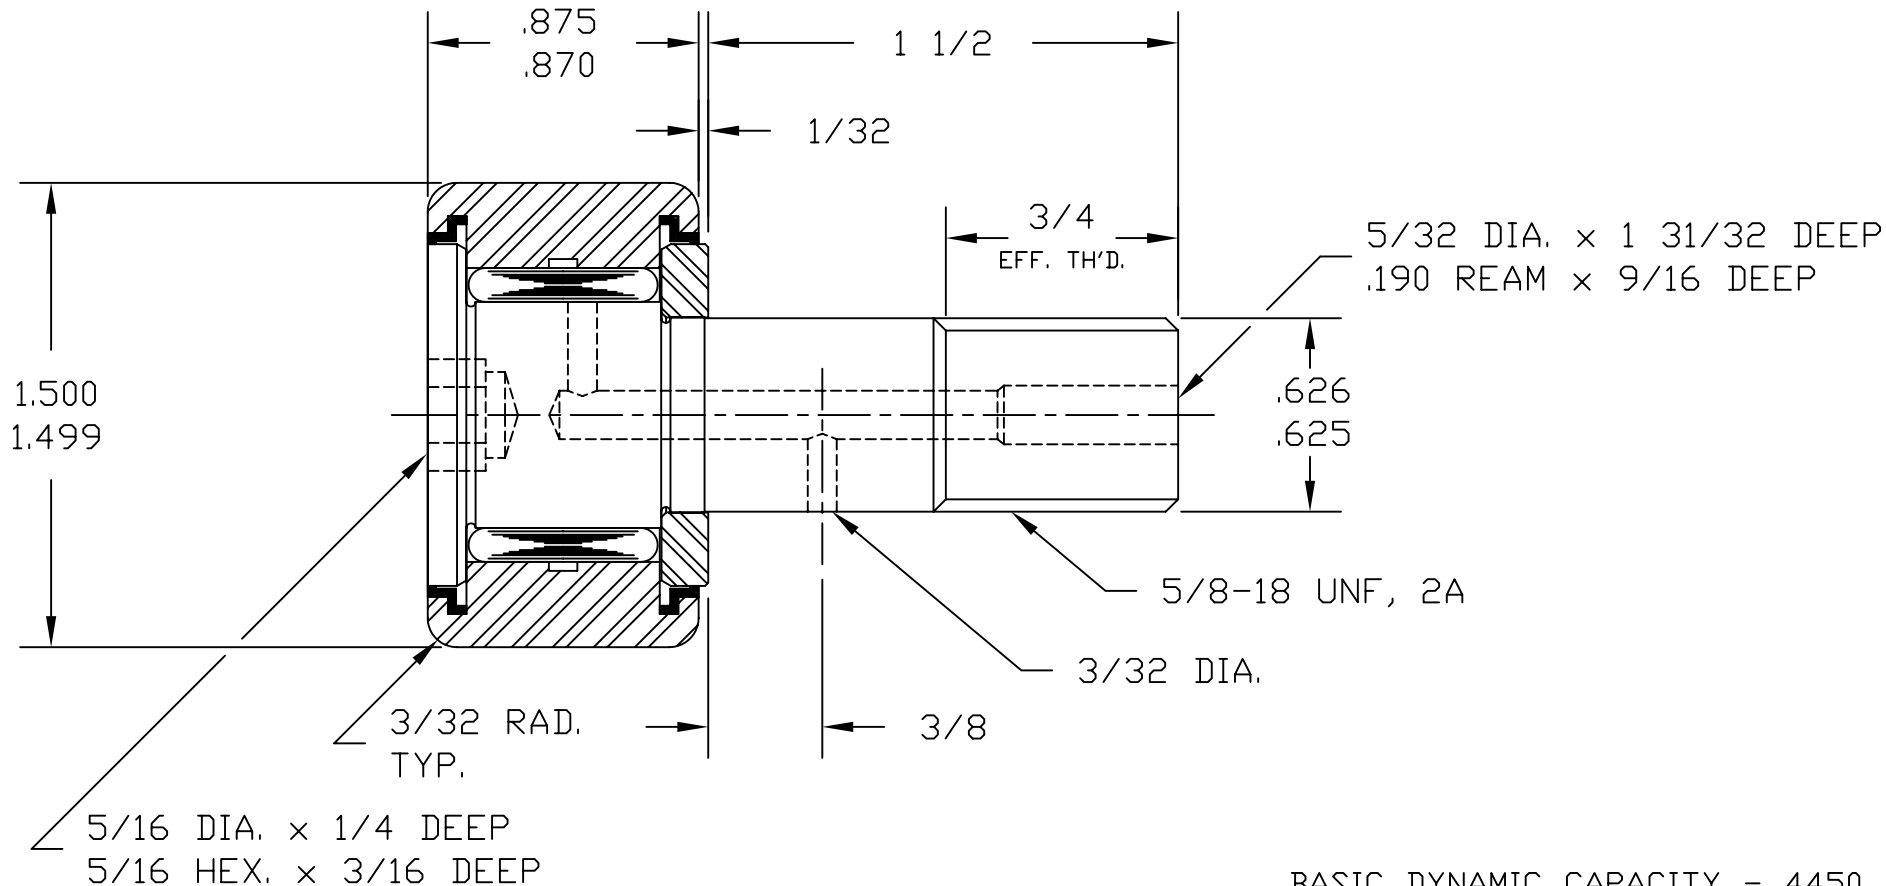

MAT'L:

INNER STUD-8620 OR EQUIVALENT,
CARBURIZE & HARDEN RACE AREA TO Rc 58-62.
OUTER-52100 OR EQUIVALENT, HARDEN TO Rc 58-62.
END WASHER-8620 OR EQUIVALENT, CARBURIZE & HARDEN TO Rc 55-62.
SEALS-ACETAL
BEARING PACKED WITH GENERAL PURPOSE EP GREASE.
RELUBE PROVISIONS WILL ACCEPT 3/16 DRIVE TYPE
FITTINGS, PLUGS SUPPLIED FOR UNUSED HOLES.

BASIC DYNAMIC CAPACITY - 4450
MAX. ALLOWABLE LOAD - 3760

REF: CR-1-1/2-XB-189

TOLERANCES

UNLESS OTHERWISE NOTED
FRACTIONS: ±.010 ANGLES: ±.5
2 PLACE DECIMALS (.00): ±.005
3 PLACE DECIMALS (.000): ±.002



ACCURATE BUSHING CO. INC.
Manufacturers of SMITH® Bearing Product
443 NORTH AVENUE
Garwood, NJ 07027

PART NAME	HEX SOCKET CAM FOLLOWER		
PART NO.	CR-1-1/2-XB		
DRAWN BY	BSK	DATE	7/7/95
CHECKED BY		FILENAME	\CRASSYS\1-1-2-XB