
SYM	REVISION	BY	DATE

SCALE ~

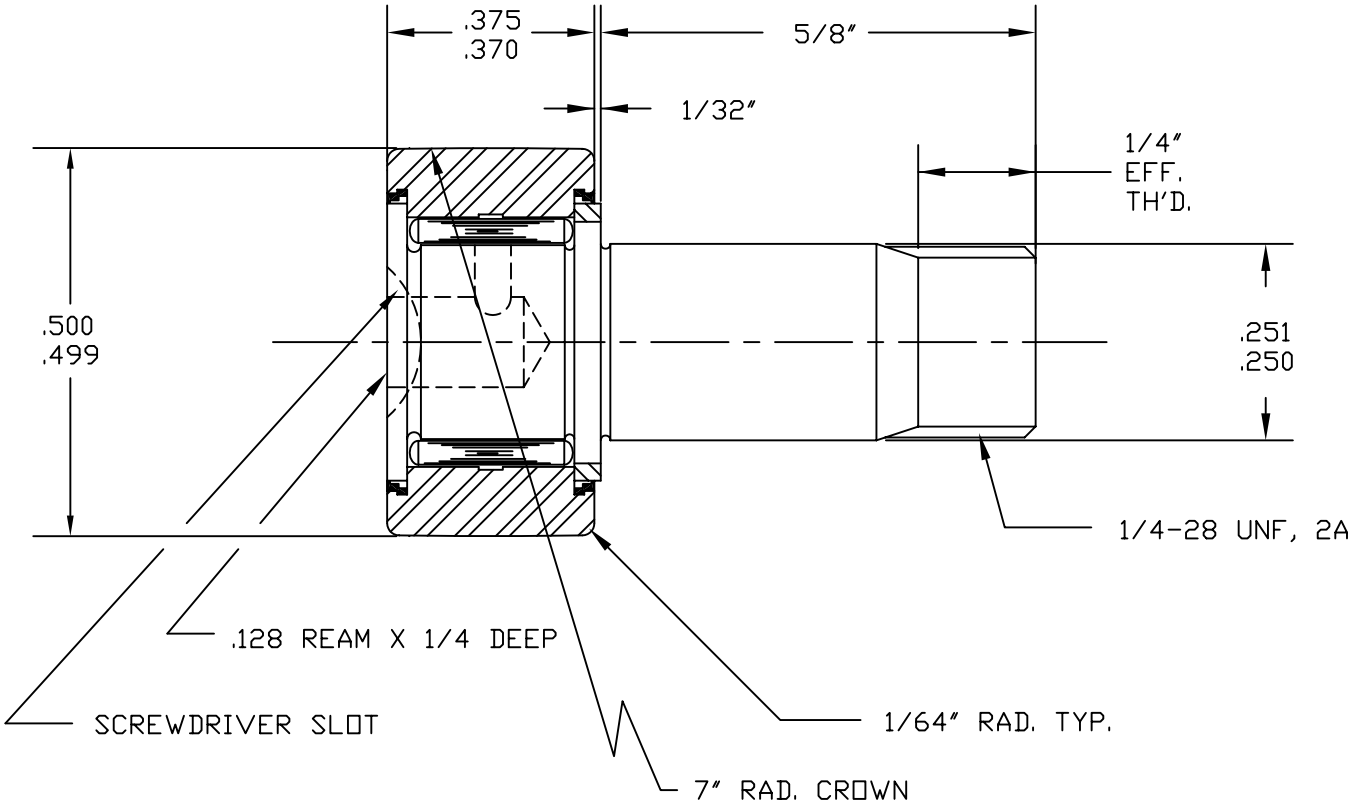

BASIC DYNAMIC CAPACITY - 680

MAX. ALLOWABLE LOAD - 550

MAT'L: ST'D. BEARING STEELS, SEALS-NONMETALIC.
BEARING PACKED WITH GENERAL PURPOSE EP GREASE.
RELUBE PROVISIONS WILL ACCEPT 1/8 DRIVE TYPE
FITTINGS, PLUGS SUPPLIED FOR UNUSED HOLES.

REF. A-5550

TOLERANCES

FRACTIONS ± .010 ANGLES ± .5
2 PLACE DECIMALS (.00) ± .005
3 PLACE DECIMALS (.000) ± .002

ABC Inc.

ACCURATE BUSHING CO. INC.
443 North Avenue
Garwood, NJ 07027

PART NAME	CAM FOLLOWER		
PART NO.	HR-1/2-XC		
DRAWN BY	JMK	DATE	03/94
CHECKED BY		FILENAME	\HRASSYS\1-2-XC