



READY **2** GO



Industrial Hose
Coupled Hose Assemblies


Table of Contents

| | |
|--------------------|----|
| Introduction | 2 |
| Air / Multipurpose | 4 |
| Cleaning Equipment | 9 |
| Petroleum | 17 |
| Steam | 22 |
| Specialty | 26 |
| Water-Consumer | 29 |
| Welding | 32 |



Air / Multipurpose

From in-plant air, to construction site for pneumatic tools of all sizes and applications, Continental ContiTech branded Air and Multipurpose hoses are ready to go to meet the demands of your applications. Available for light to severe duty applications in the sizes you need.

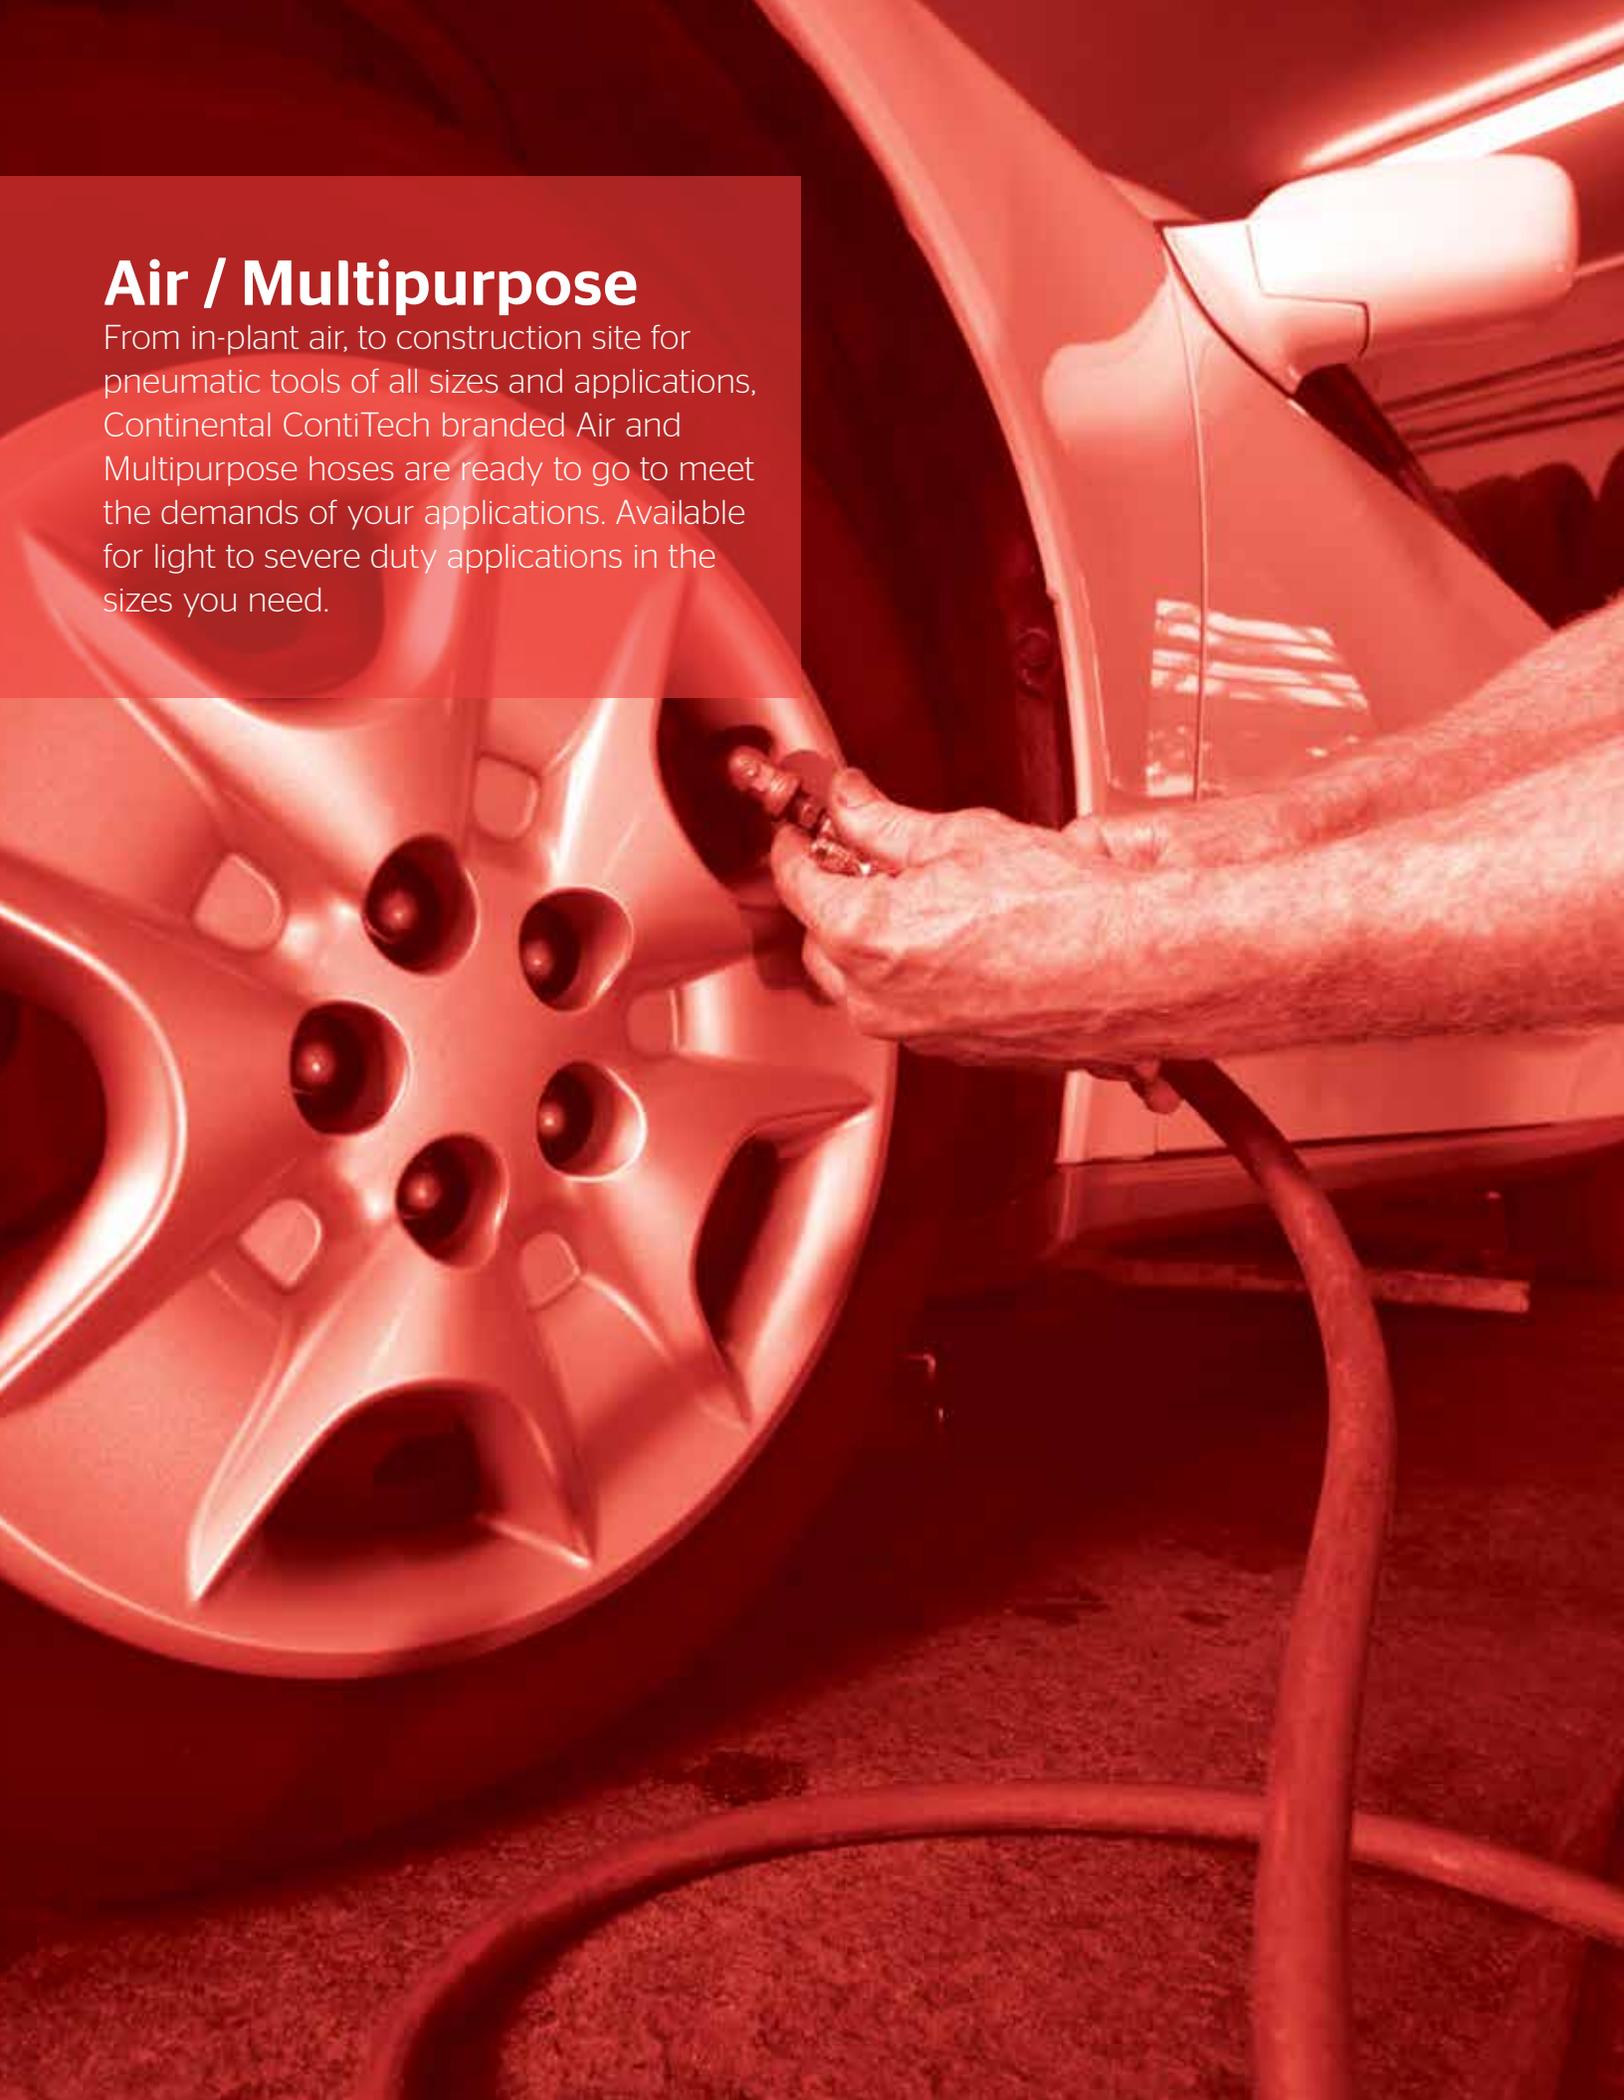

Pliovic®

Lightweight



A lightweight, economical general purpose hose for carrying air, water, and many spray solutions. Pliovic is suitable for a wide range of industrial, construction and agricultural hand sprayers, and

many multipurpose applications. Rated to temperatures of -10°F to 158°F (-23°C to 70°C). Non-conductive, minimum electrical resistance greater than one (1) megohm per inch of hose length at

1000 Volts DC. Available in Pliovic GS construction or a thick cover, Pliovic Plus construction.

Tube

Black Pliovic, RMA Class B (Medium Oil Resistance)

Cover

Pliovic, smooth finish, RMA Class B (Medium Oil Resistance)

Reinforcement

Spiral synthetic yarn

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|--------------|----------|------------|----------------|-------------|---------------|------------|
| Pliovic GS | 20146821 | Blue | 1/4" | MXM 1/4 NPT | 50' | 540-350 |
| Pliovic GS | 20146822 | Blue | 1/4" | MXM 1/4 NPT | 100' | 540-350 |
| Pliovic GS | 20146823 | Blue | 3/8" | MXM 1/4 NPT | 50' | 540-350 |
| Pliovic GS | 20146824 | Blue | 3/8" | MXM 1/4 NPT | 100' | 540-350 |

Frontier®

Good | Most Popular



An economical air and water hose, Frontier is for a wide range of industrial, construction and agricultural applications. Available in 200, 250, and 300 psi working

pressures with a temperature rating of -40°F to 190°F (-40°C to 88°C).

Tube

EPDM synthetic rubber, RMA Class C (Limited Oil Resistance)

Cover

Black, Red, Yellow, Green or Blue EPDM synthetic rubber

Reinforcement

Spiral synthetic yarn. 2" is braided

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|--------------|----------|------------|----------------|-------------|---------------|------------|
| Frontier 200 | 20129541 | Red | 1/4" | MXM 1/4 NPT | 25' | 569-011 |
| Frontier 200 | 20132830 | Red | 1/4" | MXM 1/4 NPT | 50' | 569-011 |
| Frontier 200 | 20129680 | Red | 3/8" | MXM 1/4 NPT | 25' | 569-011 |
| Frontier 200 | 20132831 | Red | 3/8" | MXM 1/4 NPT | 50' | 569-011 |
| Frontier 200 | 20129682 | Red | 3/8" | MXM 1/4 NPT | 100' | 569-011 |
| Frontier 200 | 20132832 | Red | 1/2" | MXM 1/2 NPT | 50' | 569-011 |
| Frontier 200 | 20147652 | Red | 3/4" | MXM 3/4 NPT | 100' | 569-012 |
| Frontier 200 | 20147625 | Red | 1/4" | MXM 1/4 NPT | 50' | 569-557 |
| Frontier 200 | 20147626 | Red | 1/4" | MXM 1/4 NPT | 100' | 569-557 |
| Frontier 200 | 20147627 | Red | 3/8" | MXM 1/4 NPT | 50' | 569-557 |
| Frontier 200 | 20147628 | Red | 3/8" | MXM 1/4 NPT | 100' | 569-557 |
| Frontier 200 | 20147629 | Red | 1/2" | MXM 1/2 NPT | 50' | 569-557 |
| Frontier 200 | 20147650 | Red | 1/2" | MXM 1/2 NPT | 100' | 569-557 |

Variflex™

Better | High Oil Resistance



A good-quality, economical general purpose hose for industrial air service, compressor lines, pneumatic tools, low-pressure spray, and many other applications where the need for oil resistance is

moderate. Non-conductive, minimum electrical resistance greater than one (1) megohm per inch of hose length at 1000 volts DC. Available in 200 and 300 psi

working pressures, with a temperature rating of -20°F to 190°F (-29°C to 88°C).

Tube

Nitrile synthetic rubber, RMA Class A (High Oil Resistance)

Cover

Red, Blue or Black Chemivac™ synthetic rubber, RMA Class B (Medium Oil Resistance)

Reinforcement

Spiral synthetic yarn (3/16" - 1 1/2"), braided synthetic yarn (2")

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|--------------|----------|------------|----------------|-------------|---------------|------------|
| Variflex | 20104919 | Red | 1/4" | MXM 1/4 NPT | 50' | 569-008 |
| Variflex | 20104942 | Red | 3/8" | MXM 1/4 NPT | 50' | 569-008 |
| Variflex | 20104909 | Red | 1/2" | MXM 1/2 NPT | 50' | 569-008 |

Gorilla®

Best | Heavy Duty Oil Resistance



A premium-quality, multipurpose industrial hose with a wide range of applications in factories, construction, agriculture, quarries, mines, railroads, the oil and gas industry and shipbuilding. All

sizes are rated at 500 psi (3.4 MPa) maximum working pressure and have temperature ratings of -20°F to 190°F (-29°C to 88°C). Non-conductive, minimum electrical

resistance greater than one (1) megaohm per inch of hose length at 1000 Volts DC.

Tube

Nitrile synthetic rubber, RMA Class A (High Oil Resistance)

Cover

Yellow Carbryn® synthetic rubber, RMA Class A (High Oil Resistance) MSHA approved

Reinforcement

Spiral aramid yarn, 2" is braided synthetic yarn

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|--------------|----------|------------|----------------|-------------|---------------|------------|
| Gorilla | 20129563 | Yellow | 1/4" | MXM 1/4 NPT | 25' | 569-035 |
| Gorilla | 20132763 | Yellow | 1/4" | MXM 1/4 NPT | 50' | 569-035 |
| Gorilla | 20129566 | Yellow | 3/8" | MXM 3/8 NPT | 25' | 569-035 |
| Gorilla | 20132764 | Yellow | 3/8" | MXM 3/8 NPT | 50' | 569-035 |
| Gorilla | 20129569 | Yellow | 1/2" | MXM 1/2 NPT | 25' | 569-035 |
| Gorilla | 20132766 | Yellow | 1/2" | MXM 1/2 NPT | 50' | 569-035 |
| Gorilla | 20129582 | Yellow | 3/4" | MXM 3/4 NPT | 50' | 569-035 |
| Gorilla | 20129683 | Yellow | 3/4" | UNIVERSAL | 50' | 569-035 |

Flexsteel® Service Station Air



For tire inflation service from towers, reels or curb connections. Rated to temperatures of -20°F to 190°F (-29°C to 88°C).

Tube

Nitrile synthetic rubber, RMA Class B (Medium/High Oil Resistance)

Cover

Red or Black nitrile synthetic rubber, abrasion- and oil-resistant, RMA Class B (Medium/High Oil Resistance)

Reinforcement

Braided (1) steel wire braid

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|---------------|----------|------------|---------|-------------|--------|------------|
| | | | in. | | ft. | |
| Flexsteel SSA | 20023868 | Black | 1/4" | MXM 1/4 NPT | 25' | 539-097 |
| Flexsteel SSA | 20023869 | Black | 1/4" | MXM 1/4 NPT | 50' | 539-097 |
| Flexsteel SSA | 20023495 | Red | 1/4" | MXM 1/4 NPT | 25' | 539-078 |
| Flexsteel SSA | 20023497 | Red | 1/4" | MXM 1/4 NPT | 50' | 539-078 |
| Flexsteel SSA | 20023500 | Red | 3/8" | MXM 3/8 NPT | 25' | 539-078 |
| Flexsteel SSA | 20023502 | Red | 3/8" | MXM 3/8 NPT | 50' | 539-078 |
| Flexsteel SSA | 20026059 | Red | 1/4" | MXM 1/4 NPT | 25' | 569-018 |
| Flexsteel SSA | 20026061 | Red | 1/4" | MXM 1/4 NPT | 50' | 569-018 |
| Flexsteel SSA | 20026064 | Red | 3/8" | MXM 3/8 NPT | 25' | 569-018 |
| Flexsteel SSA | 20026066 | Red | 3/8" | MXM 3/8 NPT | 50' | 569-018 |

Contractor's Water Hose



Designed for commercial water transfer and wash down applications requiring heavy duty service. Rated to temperatures of -40°F to 190°F (-40°C to 88°C).

Tube

EPDM

Cover

Black EPDM

Reinforcement

Spiral synthetic yarn

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|-------------------------|----------|------------|---------|-----------|--------|------------|
| | | | in. | | ft. | |
| Contractor's Water Hose | 20243769 | Black | 5/8" | MF | 50' | 569-080 |
| Contractor's Water Hose | 20243770 | Black | 3/4" | MF | 50' | 569-080 |

Jackhammer™



Designed for air tool applications on construction sites. Rated to temperatures of -65°F to 180°F (-54°C to 82°C).

Tube

EPDM synthetic rubber RMA Class C (Limited Oil Resistance)

Cover

Red or Yellow EPDM synthetic rubber

Reinforcement

4-Spiral textile layer construction

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|---------------------------|----------|------------|----------------|-------------------------------|---------------|------------|
| Econ. Jackhammer/ EPDM | 20665550 | Red | 3/4" | Universal Coupling Crimped | 50' | 569-086 |
| Econ. Jackhammer/ EPDM | 20665753 | Red | 3/4" | Universal Coupling Crimped | 50' | 569-096 |
| Econ. Jackhammer/ EPDM | 20665756 | Red | 3/4" | Universal Coupling Crimped | 50' | 569-059 |
| Econ. Jackhammer/ EPDM | 20715475 | Yellow | 3/4" | Universal Coupling Crimped | 50' | 569-516 |
| Econ. Jackhammer/ EPDM | 20415002 | Red | 1" | Universal Coupling Crimped | 50' | 569-086 |

F5™ Air Hose

Lightweight & Flexible



A hybrid thermoplastic hose that provides durability and flexibility, is lightweight and has a low drag resistance. F5 is non-marking, oil resistant and performs well under cold temperatures to -40°F (-40°C)

and temperatures as high as 158°F (70°C). This 300 psi hose is designed for a variety of pneumatic applications in industries such as construction and manufacturing.

Tube

Blue Flexible TPE, RMA Class B (Medium Oil Resistance)

Cover

Matte Blue Flexible TPE, RMA Class B (Medium Oil Resistance)


Reinforcement

Polyester yarn

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|--------------|----------|------------|----------------|-------------|---------------|------------|
| F5 | 20465479 | Blue | 3/8" | MXM 3/8 NPT | 25' | 540-438 |
| F5 | 20465480 | Blue | 3/8" | MXM 3/8 NPT | 100' | 540-438 |
| F5 | 20465473 | Blue | 1/2" | MXM 1/2 NPT | 25' | 540-438 |
| F5 | 20465474 | Blue | 1/2" | MXM 1/2 NPT | 50' | 540-438 |
| F5 | 20465485 | Blue | 1/4" | MXM 1/4 NPT | 25' | 540-438 |
| F5 | 20463349 | Blue | 1/4" | MXM 1/4 NPT | 10' | 540-438 |
| F5 | 20465487 | Blue | 1/4" | MXM 1/4 NPT | 100' | 540-438 |
| F5 | 20470808 | Blue | 3/8" | MXM 1/4 NPT | 50' | 540-438 |
| F5 | 20479683 | Blue | 3/8" | MXM 3/8 NPT | 50' | 540-438 |

Cleaning Equipment

When it comes to cleaning equipment, having the right hose can make all the difference. Continental ContiTech pressure washer and cleaning hose are available in 3/8" and 1/2" diameter in pressures up to 6000 psi in the hose lengths you need to get the job done on your schedule.

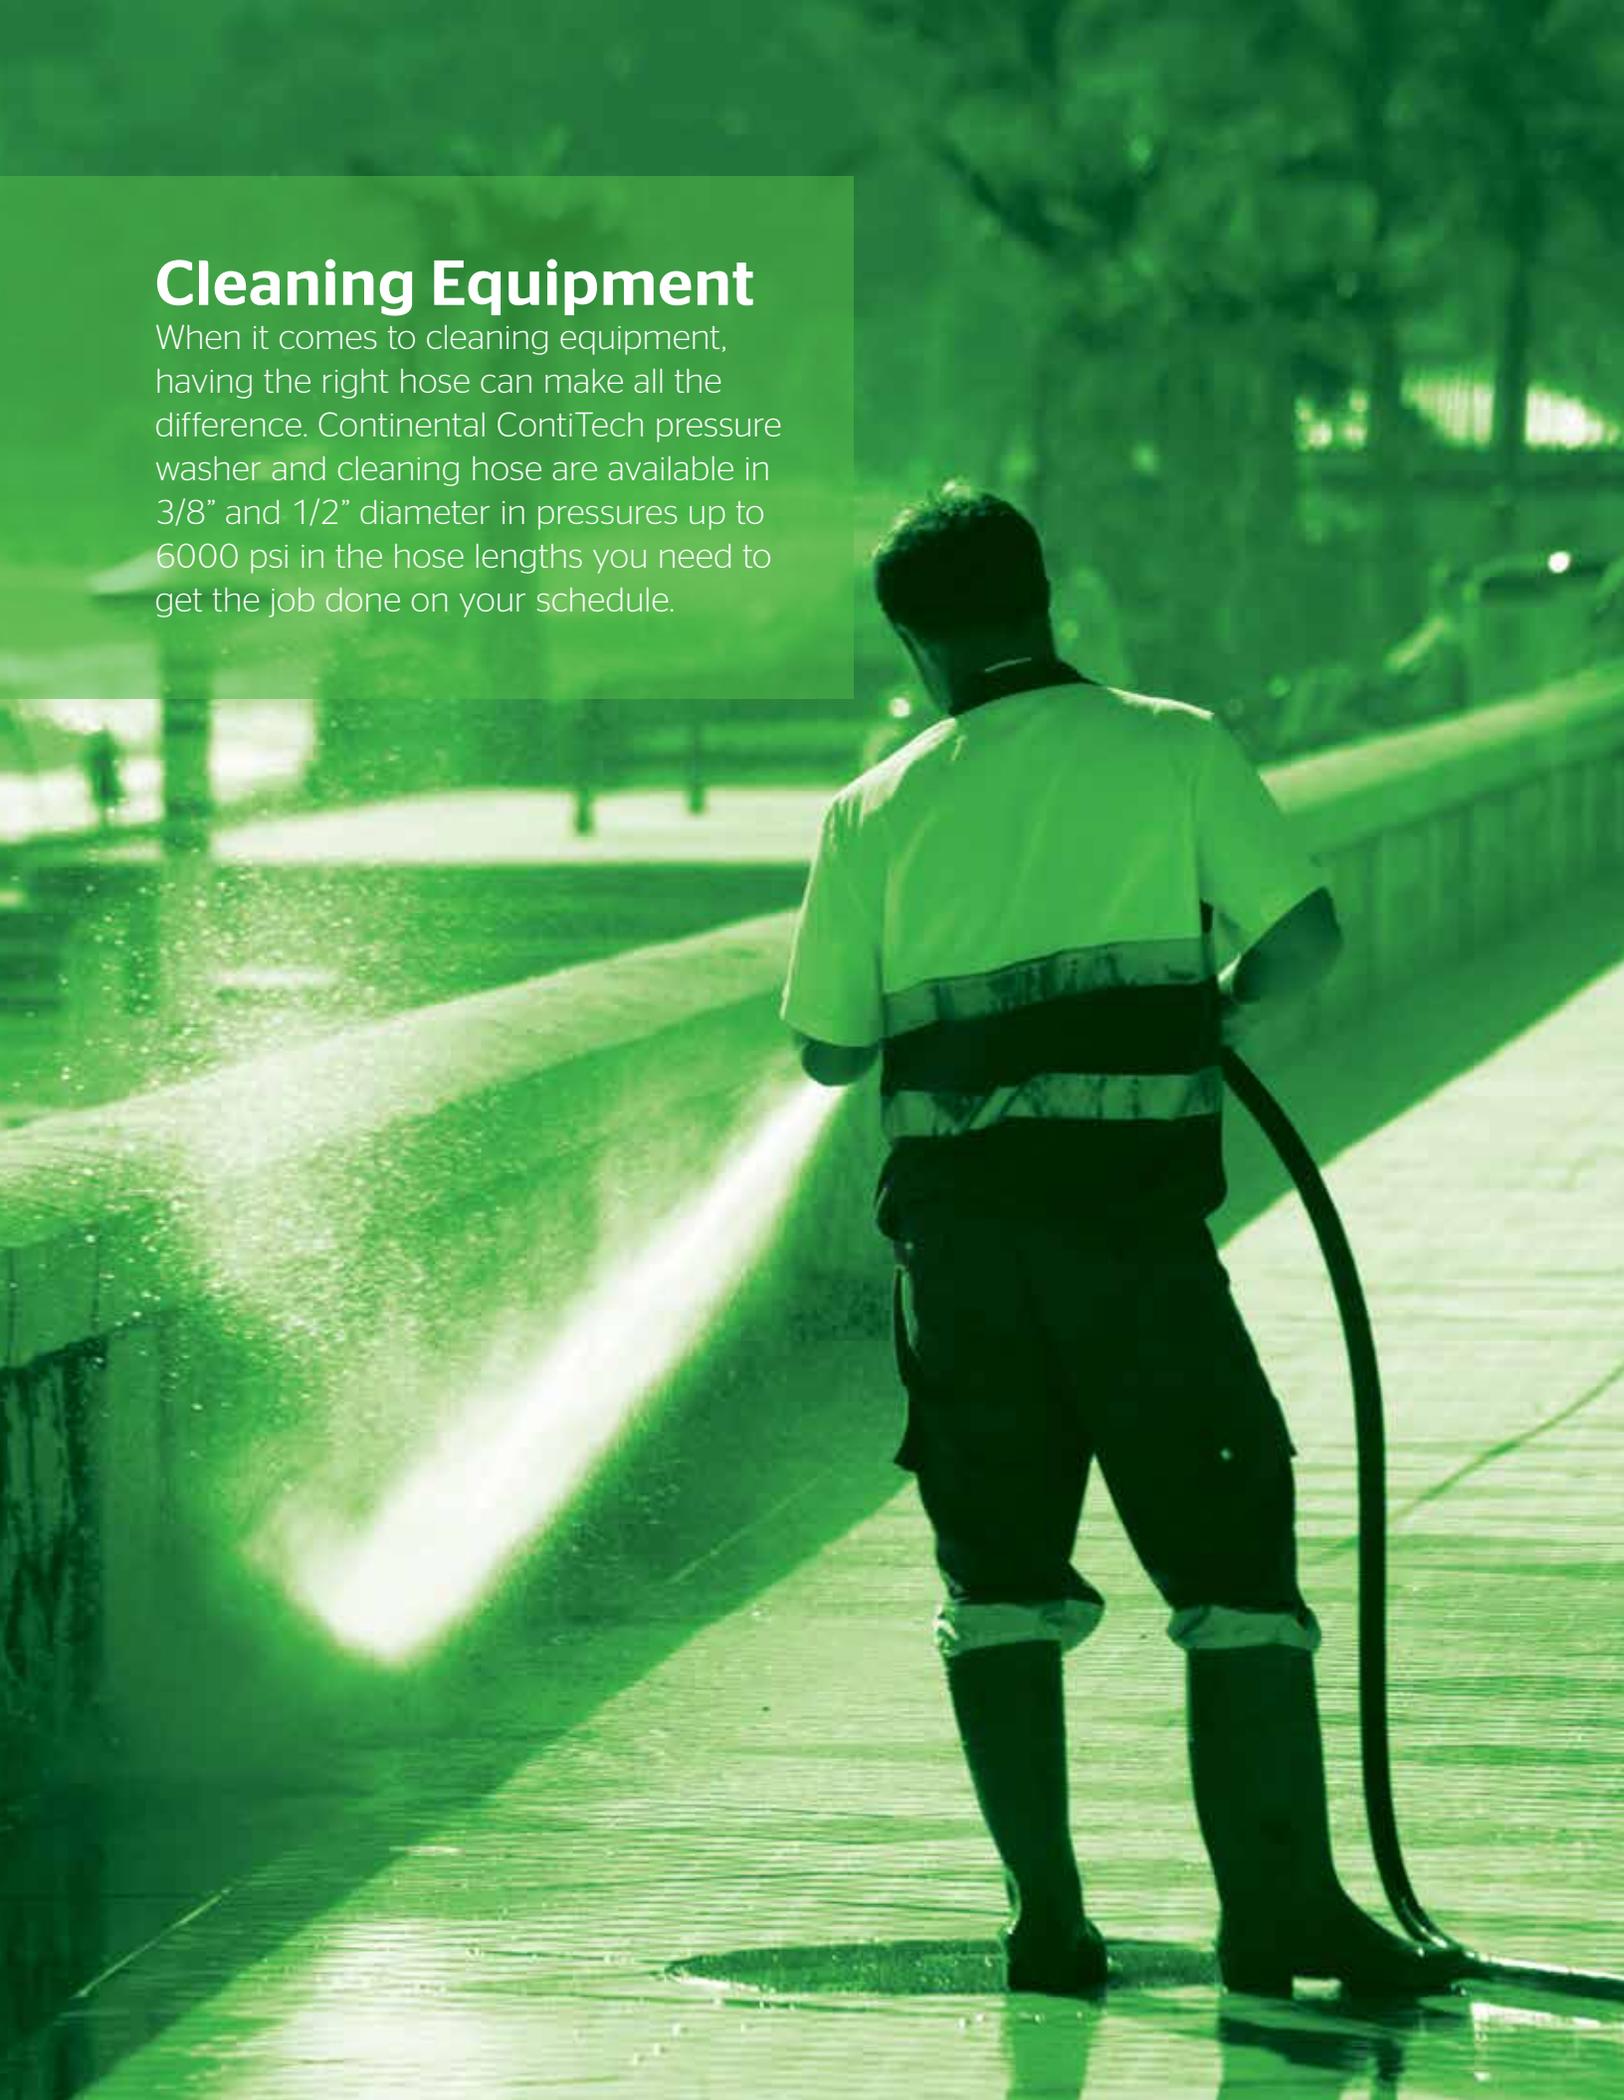

Neptune™ 1500

1500 psi WP



For pressure washer equipment, agricultural sprayers and high-pressure air lines. Rated to temperatures of -20°F to 200°F (-29°C to 93°C).

Tube

Nitrile synthetic rubber

Cover

Blue, Gray, Yellow or Black oil-resistant synthetic rubber, RMA Class B (Medium Oil Resistance)

Reinforcement

Braided (1) synthetic yarn up through 1/2". Braided (2) synthetic yarn for 3/4"

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|--------------|----------|------------|---------|---------------------|--------|------------|
| | | | in. | | ft. | |
| Neptune 1500 | 20023123 | Black | 3/8" | MXMS w/ Kink Guards | 50' | 536-388 |
| Neptune 1500 | 20023125 | Black | 3/8" | MXMS w/ Kink Guards | 100' | 536-388 |
| Neptune 1500 | 20070397 | Gray | 3/8" | MXMS w/ Kink Guards | 75' | 536-387 |

Neptune™ 3000

3000 psi WP



For use on pressure washer machines with working pressures up to 3000 psi. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

Tube

Nitrile synthetic rubber

Cover

Black, Blue, Yellow or Gray oil-resistant synthetic rubber, RMA Class B (Medium Oil Resistance)

Reinforcement

Braided (1) steel wire

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|--------------|----------|------------|---------|---------------------|--------|------------|
| | | | in. | | ft. | |
| Neptune 3000 | 20023553 | Black | 3/8" | MXMS w/ Kink Guards | 25' | 539-085 |
| Neptune 3000 | 20023570 | Black | 3/8" | MXMS w/ Kink Guards | 50' | 539-085 |
| Neptune 3000 | 20023573 | Black | 3/8" | MXMS w/ Kink Guards | 75' | 539-085 |
| Neptune 3000 | 20023581 | Black | 3/8" | MXMS w/ Kink Guards | 100' | 539-085 |
| Neptune 3000 | 20023611 | Black | 1/2" | MXMS w/ Kink Guards | 50' | 539-085 |
| Neptune 3000 | 20023613 | Black | 1/2" | MXMS w/ Kink Guards | 100' | 539-085 |
| Neptune 3000 | 20023694 | Blue | 3/8" | MXMS w/ Kink Guards | 25' | 539-089 |
| Neptune 3000 | 20023695 | Blue | 3/8" | MXMS w/ Kink Guards | 30' | 539-089 |
| Neptune 3000 | 20023696 | Blue | 3/8" | MXMS w/ Kink Guards | 40' | 539-089 |
| Neptune 3000 | 20023699 | Blue | 3/8" | MXMS w/ Kink Guards | 50' | 539-089 |
| Neptune 3000 | 20023703 | Blue | 3/8" | MXMS w/ Kink Guards | 75' | 539-089 |
| Neptune 3000 | 20023705 | Blue | 3/8" | MXMS w/ Kink Guards | 100' | 539-089 |
| Neptune 3000 | 20023717 | Blue | 1/2" | MXMS w/ Kink Guards | 50' | 539-089 |
| Neptune 3000 | 20031720 | Blue | 1/2" | MXMS w/ Kink Guards | 100' | 539-089 |
| Neptune 3000 | 20140094 | Gray | 3/8" | MXMS w/ Kink Guards | 40' | 539-090 |
| Neptune 3000 | 20023740 | Gray | 3/8" | MXMS w/ Kink Guards | 50' | 539-090 |
| Neptune 3000 | 20116289 | Gray | 3/8" | MXMS w/ Kink Guards | 75' | 539-090 |
| Neptune 3000 | 20112264 | Gray | 3/8" | MXMS w/ Kink Guards | 100' | 539-090 |

Neptune™ 4001-R

4000 psi WP



For high-pressure washer equipment with working pressures up to 4000 psi. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

Tube

Nitrile synthetic rubber

Cover

Blue, Gray, Yellow or Black oil-resistant synthetic rubber, RMA Class B (Medium Oil Resistance)

Reinforcement

Braided (1) steel wire

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|----------------|----------|------------|---------|---------------------|--------|------------|
| | | | in. | | ft. | |
| Neptune 4001-R | 20141700 | Black | 3/8" | MXMS w/ Kink Guards | 25' | 539-261 |
| Neptune 4001-R | 20119464 | Black | 3/8" | MXMS w/ Kink Guards | 50' | 539-261 |
| Neptune 4001-R | 20141702 | Black | 3/8" | MXMS w/ Kink Guards | 75' | 539-261 |
| Neptune 4001-R | 20129270 | Black | 3/8" | MXMS w/ Kink Guards | 100' | 539-261 |
| Neptune 4001-R | 20119465 | Blue | 3/8" | MXMS w/ Kink Guards | 50' | 539-265 |
| Neptune 4001-R | 20135601 | Yellow | 3/8" | MXMS w/ Kink Guards | 50' | 539-266 |

Neptune™ 4500

4500 psi WP



For use on pressure washer machines with working pressures up to 4500 psi. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

Tube

Nitrile synthetic rubber

Cover

Blue, Gray, Yellow or Black oil-resistant synthetic rubber, RMA Class B (Medium Oil Resistance)

Reinforcement

Braided (1) steel wire

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|--------------|----------|------------|---------|---------------------|--------|------------|
| | | | in. | | ft. | |
| Neptune 4500 | 20023775 | Black | 3/8" | MXMS w/ Kink Guards | 50' | 539-091 |
| Neptune 4500 | 20023778 | Black | 3/8" | MXMS w/ Kink Guards | 75' | 539-091 |
| Neptune 4500 | 20023785 | Black | 3/8" | MXMS w/ Kink Guards | 100' | 539-091 |
| Neptune 4500 | 20023796 | Black | 1/2" | MXMS w/ Kink Guards | 50' | 539-091 |
| Neptune 4500 | 20023799 | Black | 1/2" | MXMS w/ Kink Guards | 100' | 539-091 |
| Neptune 4500 | 20024007 | Blue | 3/8" | MXMS w/ Kink Guards | 50' | 539-124 |
| Neptune 4500 | 20142226 | Blue | 3/8" | MXMS w/ Kink Guards | 75' | 539-124 |
| Neptune 4500 | 20046210 | Blue | 3/8" | MXMS w/ Kink Guards | 100' | 539-124 |

Neptune™ 6000

6000 psi WP



For use on pressure washer machines with working pressures up to 6000 psi. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

Tube

Nitrile synthetic rubber

Cover

Black oil resistant synthetic rubber
RMA Class B (Medium Oil Resistance)

Reinforcement

Braided (2) steel wires

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|--------------|----------|------------|---------|---------------------|--------|------------|
| | | | in. | | ft. | |
| Neptune 6000 | 20130010 | Black | 3/8" | MXMS w/ Kink Guards | 50' | 539-149 |
| Neptune 6000 | 20133521 | Black | 3/8" | MXMS w/ Kink Guards | 100' | 539-149 |

Gauntlet® 1500

High Abrasion & Oil Resistance



Gauntlet 1500 is for pressure washer equipment with working pressures up to 1500 psi. Its super abrasion-resistant cover provides maximum protection against

adverse effects of oil and animal fats. Rated to temperatures of -20°F to 200°F (-29°C to 93°C).

Tube

Nitrile synthetic rubber

Cover

Black oil resistant synthetic rubber
RMA Class A (High Oil Resistance)

Reinforcement

Braided (1) synthetic yarn up through 1/2". Braided (2) synthetic yarn for 3/4".

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|---------------|----------|------------|---------|---------------------|--------|------------|
| | | | in. | | ft. | |
| Gauntlet 1500 | 20023335 | Yellow | 3/8" | MXMS w/ Kink Guards | 50' | 536-474 |
| Gauntlet 1500 | 20023336 | Yellow | 3/8" | MXMS w/ Kink Guards | 75' | 536-474 |
| Gauntlet 1500 | 20023337 | Yellow | 3/8" | MXMS w/ Kink Guards | 100' | 536-474 |
| Gauntlet 1500 | 20119932 | Yellow | 1/2" | MXMS w/ Kink Guards | 100' | 536-474 |
| Gauntlet 1500 | 20119931 | Yellow | 1/2" | MXMS w/ Kink Guards | 75' | 536-474 |
| Gauntlet 1500 | 20119930 | Yellow | 1/2" | MXMS w/ Kink Guards | 50' | 536-474 |

Gauntlet® 3000

High Abrasion & Oil Resistance



For use on pressure washer machines with working pressures up to 3000 psi. Its super abrasion-resistant cover provides maximum protection against adverse effects

of oil and animal fats. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

Tube

Nitrile synthetic rubber

Cover

Black or Yellow oil-resistant Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance)

Reinforcement

Braided (1) steel wire

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|---------------|----------|------------|----------------|---------------------|---------------|------------|
| Gauntlet 3000 | 20023881 | Black | 3/8" | MXMS w/ Kink Guards | 25' | 539-099 |
| Gauntlet 3000 | 20023885 | Black | 3/8" | MXMS w/ Kink Guards | 50' | 539-099 |
| Gauntlet 3000 | 20023886 | Black | 3/8" | MXMS w/ Kink Guards | 75' | 539-099 |
| Gauntlet 3000 | 20023887 | Black | 3/8" | MXMS w/ Kink Guards | 100' | 539-099 |
| Gauntlet 3000 | 20023888 | Black | 1/2" | MXMS w/ Kink Guards | 50' | 539-099 |
| Gauntlet 3000 | 20023896 | Yellow | 3/8" | MXMS w/ Kink Guards | 25' | 539-100 |
| Gauntlet 3000 | 20023899 | Yellow | 3/8" | MXMS w/ Kink Guards | 50' | 539-100 |
| Gauntlet 3000 | 20023900 | Yellow | 3/8" | MXMS w/ Kink Guards | 75' | 539-100 |
| Gauntlet 3000 | 20023904 | Yellow | 1/2" | MXMS w/ Kink Guards | 50' | 539-100 |
| Gauntlet 3000 | 20023905 | Yellow | 1/2" | MXMS w/ Kink Guards | 100' | 539-100 |

Gauntlet® 4500

High Abrasion & Oil Resistance



For use on pressure washer machines with working pressures up to 4500 psi. Its super abrasion-resistant cover provides maximum protection against adverse effects

of oil and animal fats. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

Tube

Nitrile synthetic rubber

Cover

Black or Yellow oil-resistant Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance)

Reinforcement

Braided (2) steel wires

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|---------------|----------|------------|----------------|---------------------|---------------|------------|
| Gauntlet 4500 | 20048788 | Black | 1/2" | MXMS w/ Kink Guards | 50' | 539-122 |
| Gauntlet 4500 | 20024002 | Yellow | 3/8" | MXMS w/ Kink Guards | 50' | 539-120 |
| Gauntlet 4500 | 20161272 | Yellow | 3/8" | MXMS w/ Kink Guards | 100' | 539-120 |

Galvanator® 3000

Rust Resistant Wire | Severe Duty



For pressure washer equipment. Its rust-resistant reinforcement and superior abrasion-resistant cover provide maximum protection against adverse effects of water, oil and animal fats. Rated to

temperatures of -20°F to 250°F (-29°C to 121°C).

Tube

Nitrile synthetic rubber

Cover

Black or Yellow oil-resistant Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance)

Reinforcement

Braided (1) steel wire

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|-----------------|----------|------------|----------------|---------------------|---------------|------------|
| Galvanator 3000 | 20024111 | Black | 3/8" | MXMS w/ Kink Guards | 25' | 539-201 |
| Galvanator 3000 | 20024114 | Black | 3/8" | MXMS w/ Kink Guards | 50' | 539-201 |
| Galvanator 3000 | 20024115 | Black | 3/8" | MXMS w/ Kink Guards | 75' | 539-201 |
| Galvanator 3000 | 20024116 | Black | 3/8" | MXMS w/ Kink Guards | 100' | 539-201 |
| Galvanator 3000 | 20024117 | Black | 1/2" | MXMS w/ Kink Guards | 50' | 539-201 |
| Galvanator 3000 | 20024118 | Black | 1/2" | MXMS w/ Kink Guards | 100' | 539-201 |
| Galvanator 3000 | 20024101 | Yellow | 3/8" | MXMS w/ Kink Guards | 25' | 539-200 |
| Galvanator 3000 | 20024104 | Yellow | 3/8" | MXMS w/ Kink Guards | 50' | 539-200 |
| Galvanator 3000 | 20024105 | Yellow | 3/8" | MXMS w/ Kink Guards | 75' | 539-200 |
| Galvanator 3000 | 20024106 | Yellow | 3/8" | MXMS w/ Kink Guards | 100' | 539-200 |
| Galvanator 3000 | 20024107 | Yellow | 1/2" | MXMS w/ Kink Guards | 50' | 539-200 |
| Galvanator 3000 | 20024108 | Yellow | 1/2" | MXMS w/ Kink Guards | 100' | 539-200 |

Spiraflo®

Prevents Water Damming



Designed specifically for the pressure washer industry. A pressure washer hose that reduces damming, which can cause clean spots. Ideal for surface cleaning

applications, such as parking decks and lots; beef, dairy and poultry operations; gas stations; garages and auto mechanic shops. Rated

to temperatures of -20°F to 250°F (-29°C to 121°C).

Tube

Black Nitrile synthetic rubber

Cover

Black, Blue or Gray oil-resistant synthetic rubber, RMA Class B (Medium/High Oil Resistance)

Reinforcement

Braided (1) synthetic yarn up through 1/2". Braided (2) synthetic yarn for 3/4".

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|--------------|----------|------------|----------------|---------------------|---------------|------------|
| Spiraflo | 20345774 | Blue | 3/8" | MXMS w/ Kink Guards | 100' | 539-186 |
| Spiraflo | 20345778 | Blue | 3/8" | MXMS w/ Kink Guards | 50' | 539-186 |

Whitewater®



For use on either steam cleaner machines or combination steam cleaner/pressure washer machines. Handles hot water at 325°F (163°C) and 350 psi for Steam Cleaning Service, handles hot water at 250°F (121°C) and 3000 psi (2500 psi on 1/2") for Pressure Washer Service.

Tube

Pyrosyn® synthetic rubber

Cover

Black and Red Hysunite™ synthetic rubber, RMA Class B (Medium Oil Resistance)

Reinforcement

Braided (1) steel wire

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|--------------|----------|------------|----------------|---------------------|---------------|------------|
| Whitewater | 20023834 | Black | 3/8" | MXMS w/ Kink Guards | 50' | 539-095 |
| Whitewater | 20023837 | Black | 3/8" | MXMS w/ Kink Guards | 75' | 539-095 |
| Whitewater | 20023838 | Black | 3/8" | MXMS w/ Kink Guards | 100' | 539-095 |
| Whitewater | 20023842 | Black | 1/2" | MXMS w/ Kink Guards | 50' | 539-095 |
| Whitewater | 20023844 | Black | 1/2" | MXMS w/ Kink Guards | 100' | 539-095 |
| Whitewater | 20023989 | Red | 3/8" | MXMS w/ Kink Guards | 50' | 539-110 |
| Whitewater | 20133285 | Red | 3/8" | MXMS w/ Kink Guards | 100' | 539-110 |

Fortress® 1000

Microban® Antimicrobial



For use on pressure washer machines with working pressures up to 1000 psi. Applications include washdown service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries. Its super abrasion- and oil-resistant cover provides maximum protection against the adverse effects of oil and animal fats. The cover of our Fortress Washdown hose incorporates Microban's antimicrobial built-in product protection. Rated to temperatures of -20°F to 200°F (-29°C to 93°C).

Tube

Nitrile synthetic rubber

Cover

Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance) with Microban product protection

Reinforcement

Braided (1) synthetic yarn

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|---------------|----------|------------|----------------|---------------------|---------------|------------|
| Fortress 1000 | 20221285 | Yellow | 3/8" | MXMS w/ Kink Guards | 50' | 536-575 |
| Fortress 1000 | 20171832 | Yellow | 3/8" | MXMS w/ Kink Guards | 100' | 536-575 |

Yellow Fortress® 3000

Microban® Antimicrobial



A high-quality construction for hot water up to 200°F (93°C) cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries. Its super abrasion-

and oil-resistant cover provides maximum protection against the adverse effects of oil and animal fats. The cover of our Yellow Fortress 3000 hose incorporates Microban's

antimicrobial built-in product protection. Rated to temperatures of -20°F to 200°F (-29°C to 93°C).


- Tube**
Black Nitrile
- Cover**
Yellow Carbryn™ synthetic rubber, RMA Class A (High Oil Resistance) with Microban product protection
- Reinforcement**
Wire braid

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|---------------|----------|------------|---------|---------------------|--------|------------|
| | | | in. | | ft. | |
| Fortress 3000 | 20139341 | Yellow | 3/8" | MXMS w/ Kink Guards | 50' | 539-400 |
| Fortress 3000 | 20139702 | Yellow | 3/8" | MXMS w/ Kink Guards | 10' | 539-400 |
| Fortress 3000 | 20287106 | Yellow | 3/8" | MXMS w/ Kink Guards | 25' | 539-400 |
| Fortress 3000 | 20318435 | Yellow | 3/8" | MXMS w/ Kink Guards | 75' | 539-400 |
| Fortress 3000 | 20139702 | Yellow | 3/8" | MXMS w/ Kink Guards | 100' | 539-400 |



Petroleum

Whether your application needs are for DEF (Diesel Exhaust Fluid), Aggie Gas, LPG or Fuel Oil Delivery, Continental ContiTech has your petroleum applications covered. In stock and Ready 2 Go.

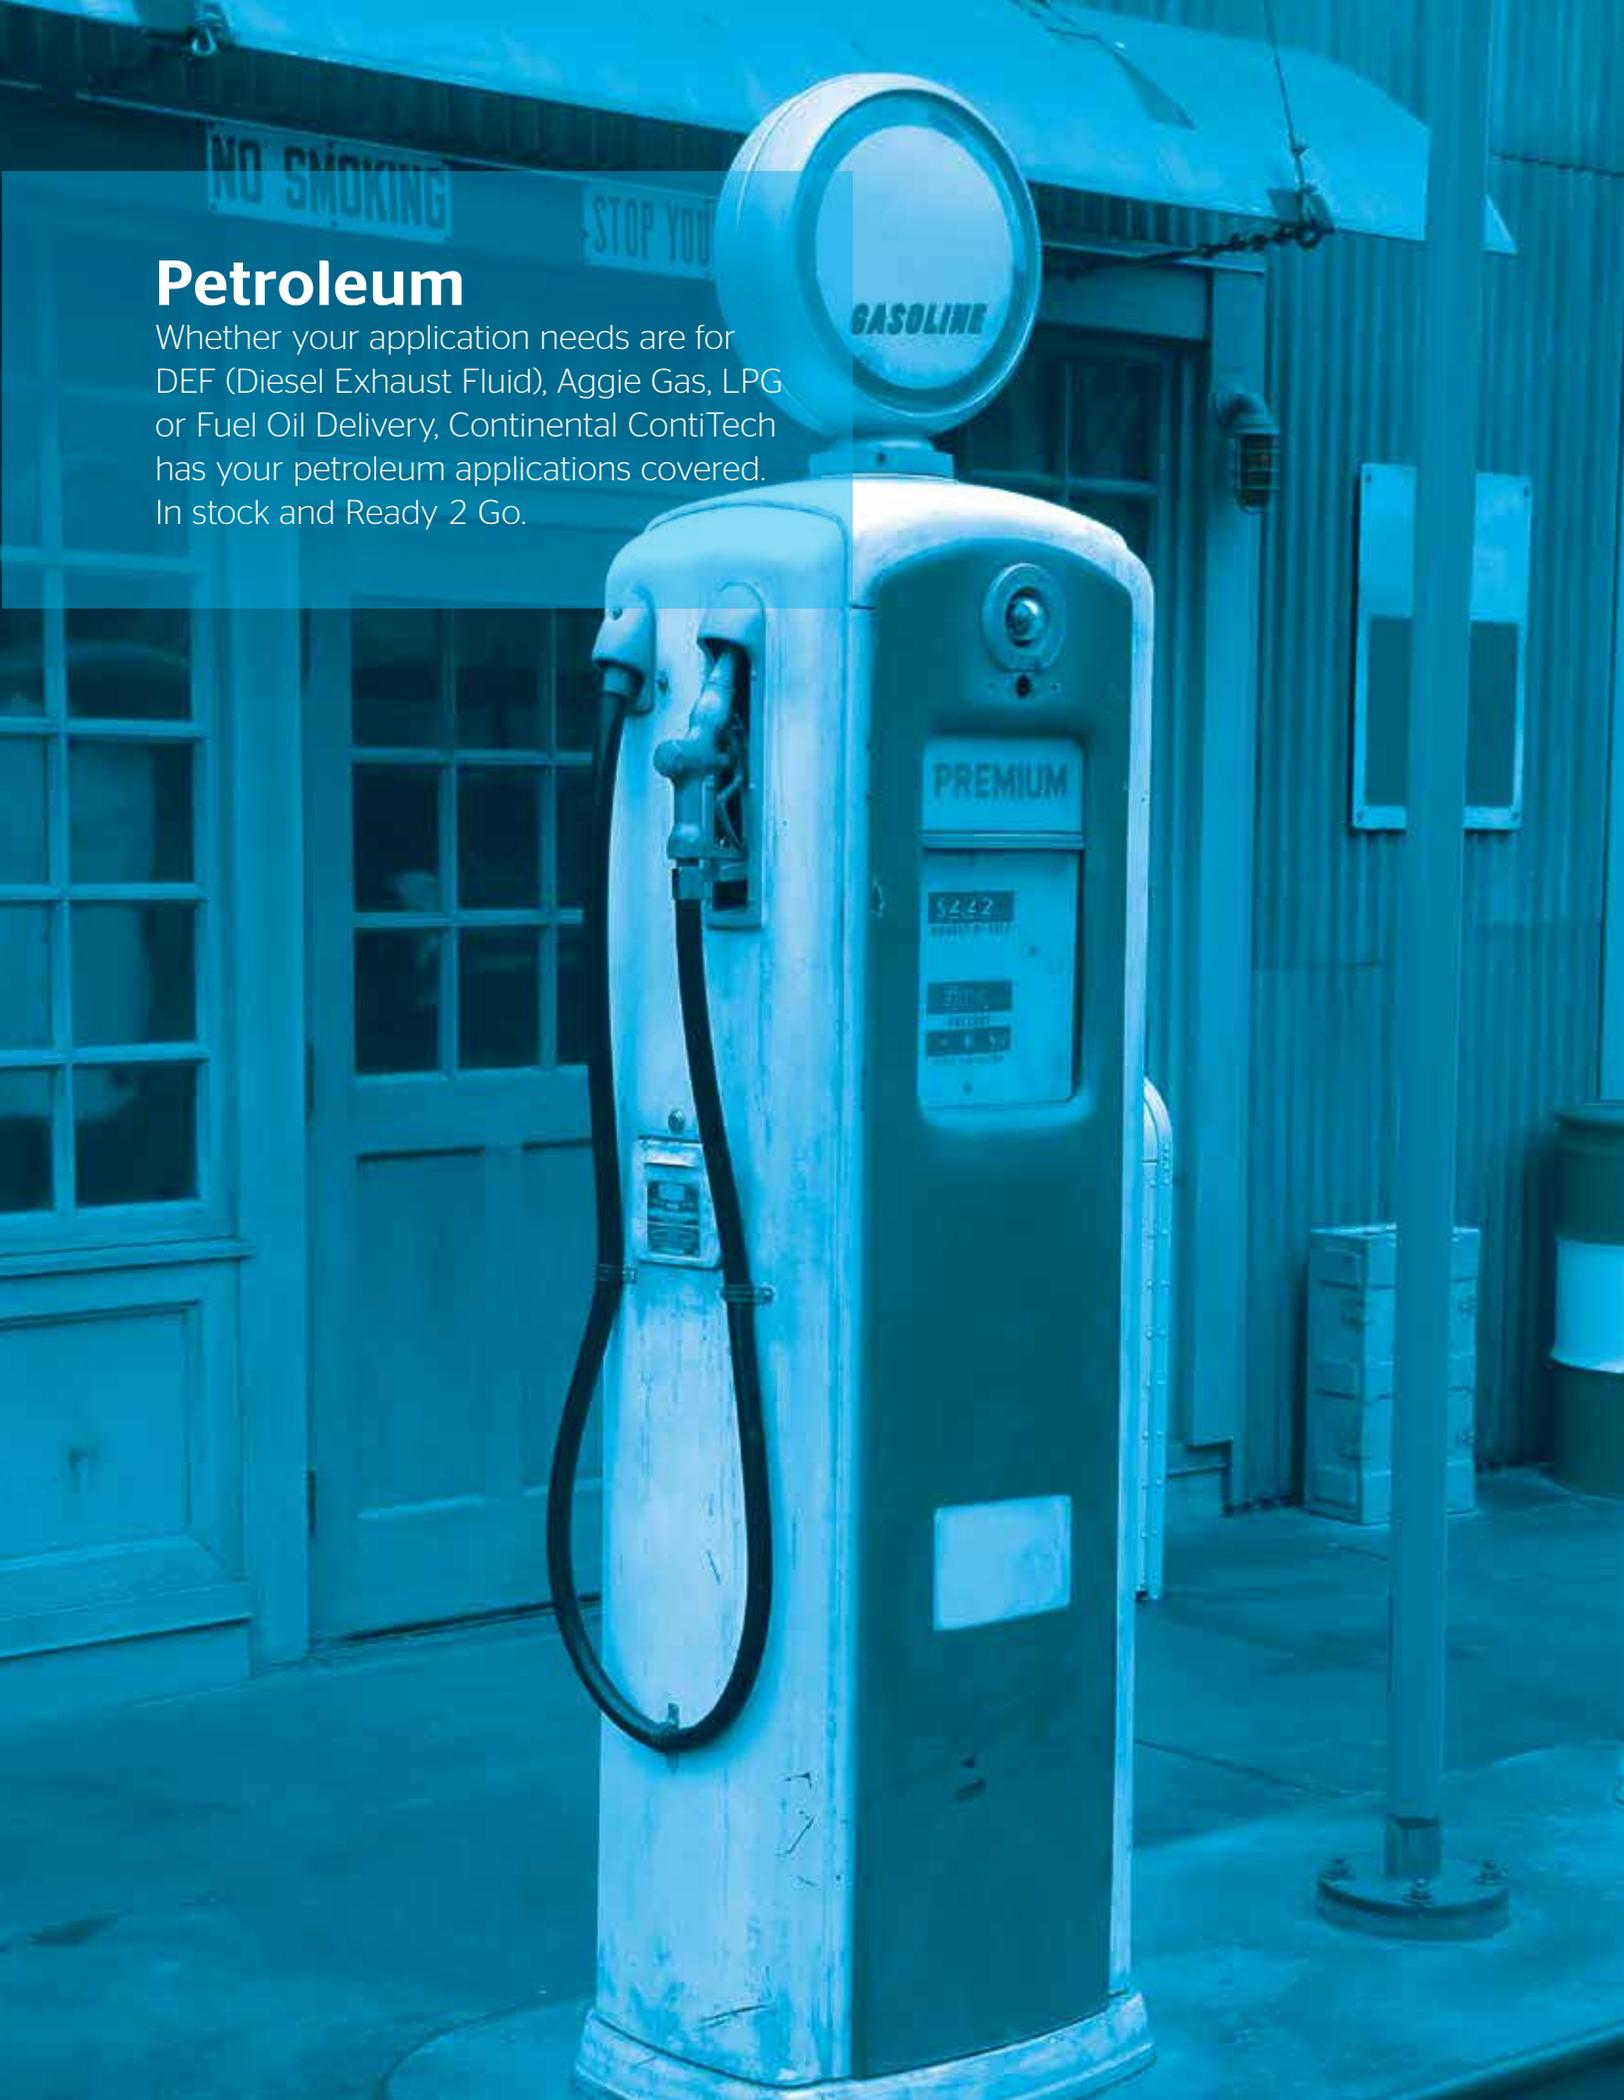

Aggie Gas™



A multi-use type hose for dispensing gasoline, grease, kerosene and petroleum oils from farm and barrel type pumps. It is for agricultural, construction

and industrial service where UL approval is not required. Rated to temperatures of -30°F to 140°F (-34°C to 60°C).

Tube

Nitrile synthetic rubber (ORS)

Cover

Black or red Chemivic™ synthetic rubber (ORS)

Reinforcement

Spiral synthetic yarn

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|--------------------------|----------|------------|----------------|------------------|---------------|------------|
| Aggie Gas w/ Static Wire | 20352464 | Black | 3/4" | ST X ST 3/4" NPT | 8' | 595-028 |
| Aggie Gas w/ Static Wire | 20352465 | Black | 3/4" | ST X ST 3/4" NPT | 10' | 595-028 |
| Aggie Gas w/ Static Wire | 20352504 | Black | 3/4" | ST X ST 3/4" NPT | 12' | 595-028 |
| Aggie Gas w/ Static Wire | 20352507 | Black | 3/4" | ST X ST 3/4" NPT | 14' | 595-028 |
| Aggie Gas w/ Static Wire | 20352551 | Black | 1" | ST X ST 1" NPT | 8' | 595-028 |
| Aggie Gas w/ Static Wire | 20352552 | Black | 1" | ST X ST 1" NPT | 10' | 595-028 |
| Aggie Gas w/ Static Wire | 20352535 | Black | 1" | ST X ST 1" NPT | 12' | 595-028 |
| Aggie Gas w/ Static Wire | 20028740 | Black | 3/4" | ST X ST 3/4" NPT | 8' | 595-001 |
| Aggie Gas w/ Static Wire | 20028742 | Black | 3/4" | ST X ST 3/4" NPT | 10' | 595-001 |
| Aggie Gas w/ Static Wire | 20028744 | Black | 3/4" | ST X ST 3/4" NPT | 12' | 595-001 |
| Aggie Gas w/ Static Wire | 20028746 | Black | 3/4" | ST X ST 3/4" NPT | 14' | 595-001 |
| Aggie Gas w/ Static Wire | 20028755 | Black | 1" | ST X ST 1" NPT | 8' | 595-001 |
| Aggie Gas w/ Static Wire | 20028757 | Black | 1" | ST X ST 1" NPT | 10' | 595-001 |
| Aggie Gas w/ Static Wire | 20028759 | Black | 1" | ST X ST 1" NPT | 12' | 595-001 |
| Aggie Gas w/ Static Wire | 20028761 | Black | 1" | ST X ST 1" NPT | 14' | 595-001 |

DEF Dispensing Hose



Diesel Exhaust Fluid (DEF: aqueous 32.5% nitrogen solution of high-purity urea in deionized water) is a key component of selective catalytic reduction (SCR) systems, which help diesel vehicles meet stringent emission regulations effective January 1, 2010. DEF is a liquid reducing agent that reacts with engine exhaust in the

presence of a catalyst to convert smog-forming nitrogen oxides (NOx) into harmless nitrogen and water vapor. Continental ContiTech DEF Dispensing Hose is specifically designed to convey the high-purity, aqueous urea solution. DEF hose tube compound is specially formulated with low extraction EPDM and peroxide cured to

provide superior extraction levels to significantly reduce contamination. Flexible softwall construction provides superior handling in standard dispensing and reeling applications. Static wire available for installation in Class I, Division 1 areas. Rated to temperatures of 140°F to 257°F (60°C to 125°C).

Tube

Specially formulated low-extraction EPDM, peroxide cured

Cover

Specially formulated low-extraction EPDM

Reinforcement

Polyester braid

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Material # |
|--------------|--------|------------|----------------|---|------------|
| DEF | Call | Black | 3/4" | Stainless Steel Male NPT | 532-027 |
| DEF | Call | Black | 3/4" | Stainless Steel Male BSPP UST Fittings | 532-027 |
| DEF | Call | Black | 3/4" | 1" Stainless Steel Male BSPP UST Fittings | 532-027 |

Redwing® Fuel Oil



Redwing Fuel Oil is for transfer and delivery of fuel oil and petroleum products for home delivery, commercial and industrial service.

Redwing Fuel Oil has two textile braids. The braided construction reduces kinking and twisting when reeling. The smooth cover has low

drag resistance. Rated to temperatures of -40°F to 140°F (-40°C to 60°C).

Tube

Nitrile synthetic rubber (ORS)

Cover

Red Chemivic™ synthetic rubber (smooth finish) (ORS)

Reinforcement

Braided (2) synthetic yarn

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|------------------|----------|------------|---------|-----------|--------|------------|
| | | | in. | | ft. | |
| Redwing Fuel Oil | 20021791 | Red | 1" | MXF | 75' | 532-016 |
| Redwing Fuel Oil | 20021792 | Red | 1" | MXF | 100' | 532-016 |
| Redwing Fuel Oil | 20021793 | Red | 1" | MXF | 125' | 532-016 |
| Redwing Fuel Oil | 20021794 | Red | 1" | MXF | 150' | 532-016 |
| Redwing Fuel Oil | 20021795 | Red | 1" | MXF | 175' | 532-016 |
| Redwing Fuel Oil | 20021796 | Red | 1" | MXF | 200' | 532-016 |
| Redwing Fuel Oil | 20021749 | Red | 1" | MXM | 50' | 532-016 |
| Redwing Fuel Oil | 20021750 | Red | 1" | MXM | 100' | 532-016 |
| Redwing Fuel Oil | 20021751 | Red | 1" | MXM | 125' | 532-016 |
| Redwing Fuel Oil | 20021752 | Red | 1" | MXM | 150' | 532-016 |
| Redwing Fuel Oil | 20021753 | Red | 1" | MXM | 175' | 532-016 |
| Redwing Fuel Oil | 20029437 | Red | 1" | MXM | 200' | 532-016 |
| Redwing Fuel Oil | 20021790 | Red | 1½" | FXF | 100' | 532-016 |
| Redwing Fuel Oil | 20118052 | Red | 1½" | FXF | 125' | 532-016 |
| Redwing Fuel Oil | 20032330 | Red | 1½" | FXF | 150' | 532-016 |
| Redwing Fuel Oil | 20021814 | Red | 1½" | MXF | 75' | 532-016 |
| Redwing Fuel Oil | 20021815 | Red | 1½" | MXF | 100' | 532-016 |
| Redwing Fuel Oil | 20021816 | Red | 1½" | MXF | 125' | 532-016 |
| Redwing Fuel Oil | 20021817 | Red | 1½" | MXF | 150' | 532-016 |
| Redwing Fuel Oil | 20021818 | Red | 1½" | MXF | 175' | 532-016 |
| Redwing Fuel Oil | 20128752 | Red | 1½" | MXM | 75' | 532-016 |
| Redwing Fuel Oil | 20021774 | Red | 1½" | MXM | 100' | 532-016 |
| Redwing Fuel Oil | 20021775 | Red | 1½" | MXM | 125' | 532-016 |
| Redwing Fuel Oil | 20021776 | Red | 1½" | MXM | 150' | 532-016 |
| Redwing Fuel Oil | 20021777 | Red | 1½" | MXM | 175' | 532-016 |
| Redwing Fuel Oil | 20021781 | Red | 1¼" | FXF | 75' | 532-016 |
| Redwing Fuel Oil | 20054447 | Red | 1¼" | FXF | 100' | 532-016 |
| Redwing Fuel Oil | 20021782 | Red | 1¼" | FXF | 125' | 532-016 |
| Redwing Fuel Oil | 20029982 | Red | 1¼" | FXF | 135' | 532-016 |
| Redwing Fuel Oil | 20021783 | Red | 1¼" | FXF | 150' | 532-016 |

Continued on next page

Redwing® Fuel Oil continued from previous page

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|------------------|----------|------------|---------|-----------|--------|------------|
| | | | in. | | ft. | |
| Redwing Fuel Oil | 20021784 | Red | 1¼" | FXF | 175' | 532-016 |
| Redwing Fuel Oil | 20021785 | Red | 1¼" | FXF | 200' | 532-016 |
| Redwing Fuel Oil | 20021799 | Red | 1¼" | MXF | 75' | 532-016 |
| Redwing Fuel Oil | 20021800 | Red | 1¼" | MXF | 100' | 532-016 |
| Redwing Fuel Oil | 20021801 | Red | 1¼" | MXF | 125' | 532-016 |
| Redwing Fuel Oil | 20021802 | Red | 1¼" | MXF | 150' | 532-016 |
| Redwing Fuel Oil | 20021803 | Red | 1¼" | MXF | 175' | 532-016 |
| Redwing Fuel Oil | 20021804 | Red | 1¼" | MXF | 200' | 532-016 |
| Redwing Fuel Oil | 20021756 | Red | 1¼" | MXM | 75' | 532-016 |
| Redwing Fuel Oil | 20021757 | Red | 1¼" | MXM | 100' | 532-016 |
| Redwing Fuel Oil | 20021758 | Red | 1¼" | MXM | 125' | 532-016 |
| Redwing Fuel Oil | 20021759 | Red | 1¼" | MXM | 150' | 532-016 |
| Redwing Fuel Oil | 20021760 | Red | 1¼" | MXM | 175' | 532-016 |
| Redwing Fuel Oil | 20021761 | Red | 1¼" | MXM | 200' | 532-016 |
| Redwing Fuel Oil | 20114832 | Red | 1⅜" | FXF | 100' | 532-016 |
| Redwing Fuel Oil | 20021786 | Red | 1⅜" | FXF | 125' | 532-016 |
| Redwing Fuel Oil | 20021787 | Red | 1⅜" | FXF | 150' | 532-016 |
| Redwing Fuel Oil | 20021788 | Red | 1⅜" | FXF | 175' | 532-016 |
| Redwing Fuel Oil | 20021789 | Red | 1⅜" | FXF | 200' | 532-016 |
| Redwing Fuel Oil | 20021806 | Red | 1⅜" | MXF | 75' | 532-016 |
| Redwing Fuel Oil | 20021807 | Red | 1⅜" | MXF | 100' | 532-016 |
| Redwing Fuel Oil | 20021808 | Red | 1⅜" | MXF | 125' | 532-016 |
| Redwing Fuel Oil | 20021810 | Red | 1⅜" | MXF | 150' | 532-016 |
| Redwing Fuel Oil | 20021811 | Red | 1⅜" | MXF | 175' | 532-016 |
| Redwing Fuel Oil | 20021812 | Red | 1⅜" | MXF | 200' | 532-016 |
| Redwing Fuel Oil | 20046181 | Red | 1⅜" | MXM | 75' | 532-016 |
| Redwing Fuel Oil | 20021765 | Red | 1⅜" | MXM | 100' | 532-016 |
| Redwing Fuel Oil | 20021767 | Red | 1⅜" | MXM | 125' | 532-016 |
| Redwing Fuel Oil | 20021768 | Red | 1⅜" | MXM | 150' | 532-016 |
| Redwing Fuel Oil | 20021769 | Red | 1⅜" | MXM | 175' | 532-016 |
| Redwing Fuel Oil | 20021770 | Red | 1⅜" | MXM | 200' | 532-016 |

LPG Delivery Pro™

Bobtail Applications | UL Approved Assemblies



A rugged delivery hose for residential and commercial delivery/transfer of liquid propane gas. This premium braided hose provides the benefit of reduced kinking and twisting while

reeling for more efficient and effective performance. The unique rubber compounding provides excellent cold weather flexibility, durable abrasion-resistant cover and significant reduction in

contaminants. Rated to temperatures of -40°F to 180°F (-40°C to 82°C). Meets all current UL, CGA & DOT standards. Not for LP appliances or other consumer applications.

Tube

Nitrile

Cover

Synthetic rubber

Reinforcement

Textile braid


| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|------------------|----------|------------|----------------|----------------|---------------|------------|
| LPG Delivery Pro | 20487242 | Black | 3/4" | MMOT 3/4" NPTF | 150' | 532-412 |

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|---------------------------|----------|------------|----------------|--------------|---------------|------------|
| LPG Delivery Pro - Spiral | 20710255 | Black | 1" | MMOT 1" NPTF | 100' | 581-412 |
| LPG Delivery Pro - Spiral | 20458415 | Black | 1" | MMOT 1" NPTF | 125' | 581-412 |
| LPG Delivery Pro - Spiral | 20458416 | Black | 1" | MMOT 1" NPTF | 150' | 581-412 |
| LPG Delivery Pro - Spiral | 20708132 | Black | 1" | MMOT 1" NPTF | 175' | 581-412 |



Steam

Crimped Steam Assemblies not only provide a permanently coupled fitting to your hose, but form a tight crimp that reduces leaks (which saves money and energy) and eliminates bulky bolt clamps while reducing potential for damage from snagging on personnel or property. See our Ready 2 Go selection of EPDM and Chlorobutyl steam assemblies.

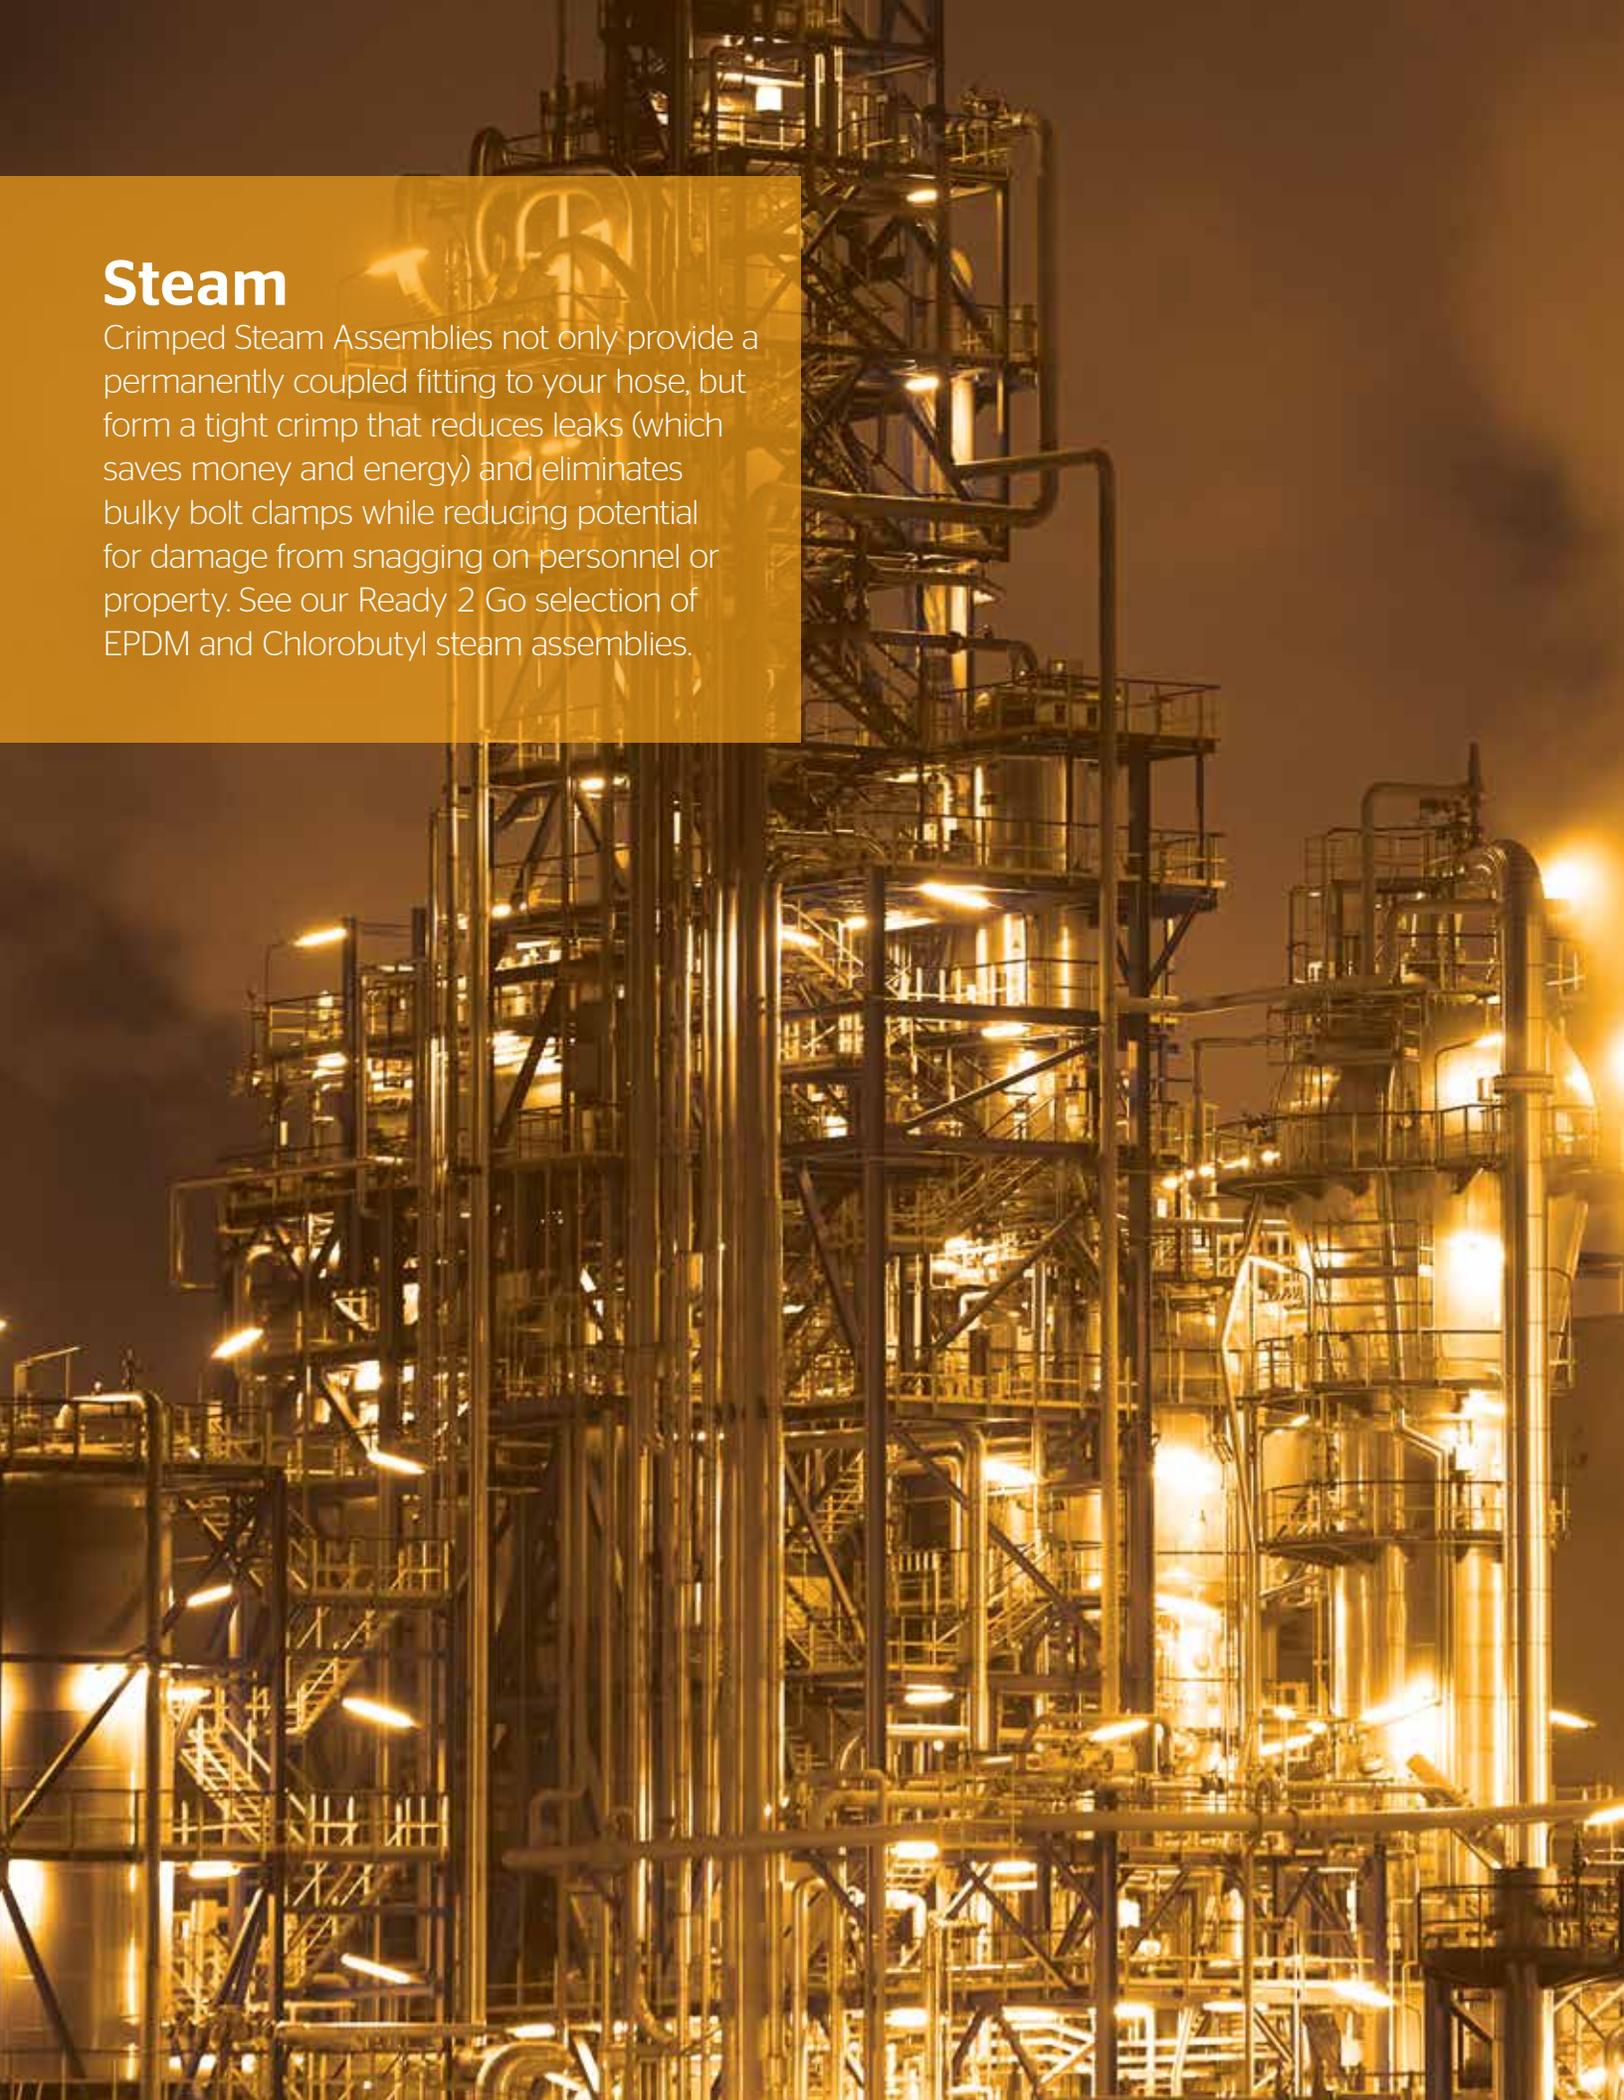

Flexsteel® 250 EPDM

Steam Crimped Steam Assembly



Used for cleaning, heat control, fire prevention, pumping, thawing, blowout service, steam pumps and hoists in open-end or permanent installation operations. It is used in

refineries, shipyards, chemical plants, steel mills, foundries and heavy industrial applications where high strength is required and where severe environmental conditions

are encountered. Rated to temperatures of -40°F to 425°F (-40°C to 218°C).

Tube

Pyrosyn®

Cover

Red or black Pyrosyn synthetic rubber

Reinforcement

Braided steel wire (3/4" and higher have 2 steel wire braids)

Crimped steam assembly application: Coupling assembly crimps permanently onto hose; forms a tight crimp that reduces leaks and eliminates bulky bolt clamps, while reducing potential for damage from snagging on personnel or property.

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|---------------|----------|------------|----------------|--------------------|---------------|------------|
| Flexsteel 250 | 20257721 | Black | 3/4" | MXM | 10' | 539-070 |
| Flexsteel 250 | 20268029 | Black | 3/4" | MXM | 25' | 539-070 |
| Flexsteel 250 | 20228557 | Black | 3/4" | MXM | 50' | 539-070 |
| Flexsteel 250 | 20258882 | Black | 3/4" | MXM | 100' | 539-070 |
| Flexsteel 250 | 20389501 | Black | 3/4" | MXM | 150' | 539-070 |
| Flexsteel 250 | 20588579 | Black | 3/4" | MXMS | 50' | 539-070 |
| Flexsteel 250 | 20229468 | Black | 3/4" | FXF | 25' | 539-070 |
| Flexsteel 250 | 20285749 | Black | 3/4" | FXF W/ GFS-3 SPUD | 25' | 539-070 |
| Flexsteel 250 | 20236009 | Black | 3/4" | FXF | 50' | 539-070 |
| Flexsteel 250 | 20237858 | Black | 3/4" | FXF W/ GFS-3 SPUD | 50' | 539-070 |
| Flexsteel 250 | 20228671 | Black | 3/4" | MXF | 25' | 539-070 |
| Flexsteel 250 | 20240370 | Black | 3/4" | MXF W/ GFS-3 SPUD | 25' | 539-070 |
| Flexsteel 250 | 20228670 | Black | 3/4" | MXF | 50' | 539-070 |
| Flexsteel 250 | 20254451 | Black | 3/4" | MXF W/ GFS-3 SPUD | 100' | 539-070 |
| Flexsteel 250 | 20442968 | Black | 3/4" | MSXF | 50' | 539-070 |
| Flexsteel 250 | 20357732 | Black | 3/4" | MSXF W/ GFS-3 SPUD | 50' | 539-070 |
| Flexsteel 250 | 20564717 | Black | 3/4" | MSXF W/ GFS-3 SPUD | 100' | 539-070 |
| Flexsteel 250 | 20527521 | Black | 3/4" | MSXMS | 50' | 539-070 |
| Flexsteel 250 | 20369545 | Black | 1" | MXM | 10' | 539-070 |
| Flexsteel 250 | 20147873 | Black | 1" | MXM | 25' | 539-070 |
| Flexsteel 250 | 20147731 | Black | 1" | MXM | 50' | 539-070 |
| Flexsteel 250 | 20297568 | Black | 1" | MXM | 100' | 539-070 |
| Flexsteel 250 | 20191540 | Black | 1" | FXF | 25' | 539-070 |
| Flexsteel 250 | 20224084 | Black | 1" | FXF | 50' | 539-070 |
| Flexsteel 250 | 20528681 | Black | 1" | FXF W/ GFS-4 SPUD | 50' | 539-070 |
| Flexsteel 250 | 20348682 | Black | 1" | FXF | 75' | 539-070 |
| Flexsteel 250 | 20284404 | Black | 1" | FXF | 100' | 539-070 |
| Flexsteel 250 | 20140280 | Black | 1" | MXF | 25' | 539-070 |
| Flexsteel 250 | 20140281 | Black | 1" | MXF | 50' | 539-070 |
| Flexsteel 250 | 20316963 | Black | 1" | MXF W/ GFS-4 SPUD | 50' | 539-070 |

Continued on next page

Flexsteel® 250 EPDM continued from previous page

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|---------------|----------|------------|---------|--------------------|--------|------------|
| | | | in. | | ft. | |
| Flexsteel 250 | 20176832 | Black | 1" | MXF | 75' | 539-070 |
| Flexsteel 250 | 20228830 | Red | 3/4" | MXM | 25' | 539-076 |
| Flexsteel 250 | 20237935 | Red | 3/4" | MXM | 50' | 539-076 |
| Flexsteel 250 | 20484093 | Red | 3/4" | MXM | 75' | 539-076 |
| Flexsteel 250 | 20240200 | Red | 3/4" | MXM | 100' | 539-076 |
| Flexsteel 250 | 20588671 | Red | 3/4" | MXMS | 50' | 539-076 |
| Flexsteel 250 | 20292451 | Red | 3/4" | FXF | 25' | 539-076 |
| Flexsteel 250 | 20248776 | Red | 3/4" | FXF | 50' | 539-076 |
| Flexsteel 250 | 20525389 | Red | 3/4" | FXF | 100' | 539-076 |
| Flexsteel 250 | 20226860 | Red | 3/4" | MXF | 25' | 539-076 |
| Flexsteel 250 | 20228809 | Red | 3/4" | MXF | 50' | 539-076 |
| Flexsteel 250 | 20230360 | Red | 3/4" | MXF W/ GFS-3 SPUD | 50' | 539-076 |
| Flexsteel 250 | 20357733 | Red | 3/4" | MSXF W/ GFS-3 SPUD | 50' | 539-076 |
| Flexsteel 250 | 20248186 | Red | 1" | MXM | 50' | 539-076 |
| Flexsteel 250 | 20207274 | Red | 1" | FXF | 50' | 539-076 |
| Flexsteel 250 | 20463125 | Red | 1" | FXF | 100' | 539-076 |
| Flexsteel 250 | 20147877 | Red | 1" | MXF | 25' | 539-076 |
| Flexsteel 250 | 20130059 | Red | 1" | MXF | 50' | 539-076 |

Flexsteel® 250 EPDM-20

Steam Crimped Steam Assembly | 20:1 Safety Factor



The Flexsteel 250 EPDM-20 features the superior performance of Flexsteel 250 Steam hose series enhanced with the increased safety factor of 20:1. This exceeds the

RMA safety standard and makes steam operations more secure and user friendly. The hose has a maximum operating pressure

of 250 psi with a temperature range of -40°F to 450°F (-40°C to 232°C).

- Tube**
Black Pyrosyn®, pin-pricked
- Cover**
Red Wrapped Pyrosyn®, pin-pricked
- Reinforcement**
(2) braid wire

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|--------------------|----------|------------|---------|---------------------|--------|------------|
| | | | in. | | ft. | |
| Flexsteel 250 EPDM | 20559167 | Red | 3/4" | MXM | 50' | 539-486 |
| Flexsteel 250 EPDM | 20559169 | Red | 3/4" | FXF | 50' | 539-486 |
| Flexsteel 250 EPDM | 20577676 | Red | 3/4" | FLXFL | 25' | 539-486 |
| Flexsteel 250 EPDM | 20577677 | Red | 3/4" | FLXFL | 50' | 539-486 |
| Flexsteel 250 EPDM | 20576337 | Red | 3/4" | FLXFL W/ GFS-3 SPUD | 50' | 539-486 |

Flexsteel® 250 CB Extreme

Steam Crimped Steam Assembly | 10:1 Safety Factor



The Flexsteel 250 CB Extreme Crimp Hose is the only Continental ContiTech chlorobutyl steam hose with an enhanced over-the-cover crimp coupling solution. The hose

is rated to a maximum operating pressure of 250 psi, and its temperature range is -40°F to 425°F (up to 450°F intermittent),

with a 10:1 safety factor. And it's the only Continental ContiTech CB steam hose with a crimp solution.

Tube

Chlorobutyl synthetic rubber

Cover

Black or Red Pyrosyn®, pin-pricked

Reinforcement

(2) braid wire

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|--------------------------|----------|------------|----------------|-----------|---------------|------------|
| Flexsteel 250 CB Extreme | 20670134 | Black | 3/4" | MXM | 50' | 539-870 |
| Flexsteel 250 CB Extreme | 20670137 | Black | 3/4" | MXF | 50' | 539-870 |
| Flexsteel 250 CB Extreme | 20670138 | Red | 3/4" | MXM | 50' | 539-876 |
| Flexsteel 250 CB Extreme | 20670139 | Red | 3/4" | MXF | 50' | 539-876 |
| Flexsteel 250 CB Extreme | 20697367 | Red | 3/4" | FXF | 50' | 539-876 |

Steam Fitting Options



(F)

Female Wing Nut



(F w/ GFS-3 Spud)

Female Wing Nut with Female NPT SPUD



(M)

Male NPT Swivel (Available as a Male NPT)



(FL)

Female Low Profile Nut with Female NPT SPUD

Note: Special fitting combinations available upon request.

Crimped steam assembly application: Coupling assembly crimps permanently onto hose; forms a tight crimp that reduces leaks and eliminates bulky bolt clamps while reducing potential for damage from snagging on personnel or property.

Specialty

For Mining applications to control dust on mining machinery, to 1000 psi and Fire Engine Booster service to 800 psi, count on Continental ContiTech hose brands to meet the demands of your specialty applications.



Fire Engine Booster

800 psi Working Pressure



For use in high-pressure fire engine booster service. Also has many applications in other heavy-duty industrial and municipal operations.

Rated to temperatures of 0°F to 180°F (-18°C to 82°C).

Tube

Synthetic rubber

Cover

Red synthetic rubber

Reinforcement

Braided (2) synthetic yarn

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|---------------------|----------|------------|---------|-------------------|--------|------------|
| | | | in. | | ft. | |
| Fire Engine Booster | 20023056 | Red | 3/4" | MXF Chrome 1 1/4" | 50' | 536-382 |
| Fire Engine Booster | 20023057 | Red | 3/4" | MXF Chrome 1 1/4" | 100' | 536-382 |
| Fire Engine Booster | 20023068 | Red | 1" | MXF Chrome 1 1/2" | 50' | 536-382 |
| Fire Engine Booster | 20023069 | Red | 1" | MXF Chrome 1 1/2" | 100' | 536-382 |

Mine Spray



For general underground water spray service in dust control application. It is also used on continuous mining machinery at the headface and on other

mechanical mining machines. Rated to temperatures of 0°F to 200°F (-18°C to 93°C).

Tube

Nitrile synthetic rubber RMA Class B (Medium Oil Resistance)

Cover

Yellow Chemivic™ synthetic rubber RMA Class B (Medium Oil Resistance) (Meets flame test requirements of MSHA Schedule 26-Section 18.65), smooth finish

Reinforcement

Braided (1) steel wire

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|--------------|----------|------------|---------|-----------------------|--------|------------|
| | | | in. | | ft. | |
| Mine Spray | 20687831 | Yellow | 3/4" | MXMS | 25' | 539-421 |
| Mine Spray | 20692509 | Yellow | 3/4" | MSXMS | 25' | 539-421 |
| Mine Spray | 20139630 | Yellow | 3/4" | MXMS | 50' | 539-421 |
| Mine Spray | 20316978 | Yellow | 3/4" | MXM | 50' | 539-421 |
| Mine Spray | 20527304 | Yellow | 3/4" | Male NPT X Female NPT | 50' | 539-421 |
| Mine Spray | 20687832 | Yellow | 3/4" | MXMS | 50' | 539-421 |
| Mine Spray | 20692550 | Yellow | 3/4" | MSXMS | 50' | 539-421 |
| Mine Spray | 20139632 | Yellow | 3/4" | MXMS | 75' | 539-421 |
| Mine Spray | 20323517 | Yellow | 3/4" | FXF JIC | 100' | 539-421 |
| Mine Spray | 20531976 | Yellow | 3/4" | MXM | 100' | 539-421 |
| Mine Spray | 20687833 | Yellow | 3/4" | MXMS | 100' | 539-421 |
| Mine Spray | 20692552 | Yellow | 3/4" | MSXMS | 100' | 539-421 |
| Mine Spray | 20316979 | Yellow | 1" | MXM | 50' | 539-421 |
| Mine Spray | 20527305 | Yellow | 1" | Male NPT X Female NPT | 50' | 539-421 |
| Mine Spray | 20531977 | Yellow | 1" | MXM | 100' | 539-421 |
| Mine Spray | 20317100 | Yellow | 1 1/4" | MXM | 50' | 539-421 |

Continued on next page

Mine Spray continued from previous page

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|--------------|----------|------------|---------|------------|--------|------------|
| | | | in. | | ft. | |
| Mine Spray | 20527306 | Yellow | 1¼" | MXF | 50' | 539-421 |
| Mine Spray | 20424729 | Yellow | 1¼" | MXF JIC | 50' | 539-421 |
| Mine Spray | 20531978 | Yellow | 1¼" | MXM | 100' | 539-421 |
| Mine Spray | 20317101 | Yellow | 1½" | MXM | 50' | 539-421 |
| Mine Spray | 20340871 | Yellow | 1½" | MXM W/ FSA | 50' | 539-421 |
| Mine Spray | 20346010 | Yellow | 1½" | MXF JIC | 50' | 539-421 |
| Mine Spray | 20424761 | Yellow | 1½" | MXF JIC | 50' | 539-421 |
| Mine Spray | 20531979 | Yellow | 1½" | MXM | 100' | 539-421 |

Hydrocarbon Drain



Hydrocarbon Drain has a high temperature, oil resistance tube designed to displace hot, liquified

product from steam cleaning operations.


- Tube**
Black Nitrile
- Cover**
Blue Synthetic Rubber cover
- Reinforcement**
One wire

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|-------------------|----------|------------|---------|-----------------------|--------|------------|
| | | | in. | | ft. | |
| Hydrocarbon Drain | 20677039 | Blue | 3/4" | MXM Steel 3/4" NFT | 25' | 547-819 |
| Hydrocarbon Drain | 20733235 | Blue | 3/4" | MXM Steel 3/4" NFT | 50' | 547-819 |

Campbell Air Hammer Coupling also available. Contact customer service for a quote or part number.

Water-Consumer

From consumer to commercial grade, thermoplastic to rubber construction, cold to hot water service; Ready 2 Go garden hoses are available in 5/8" and 3/4" diameters.

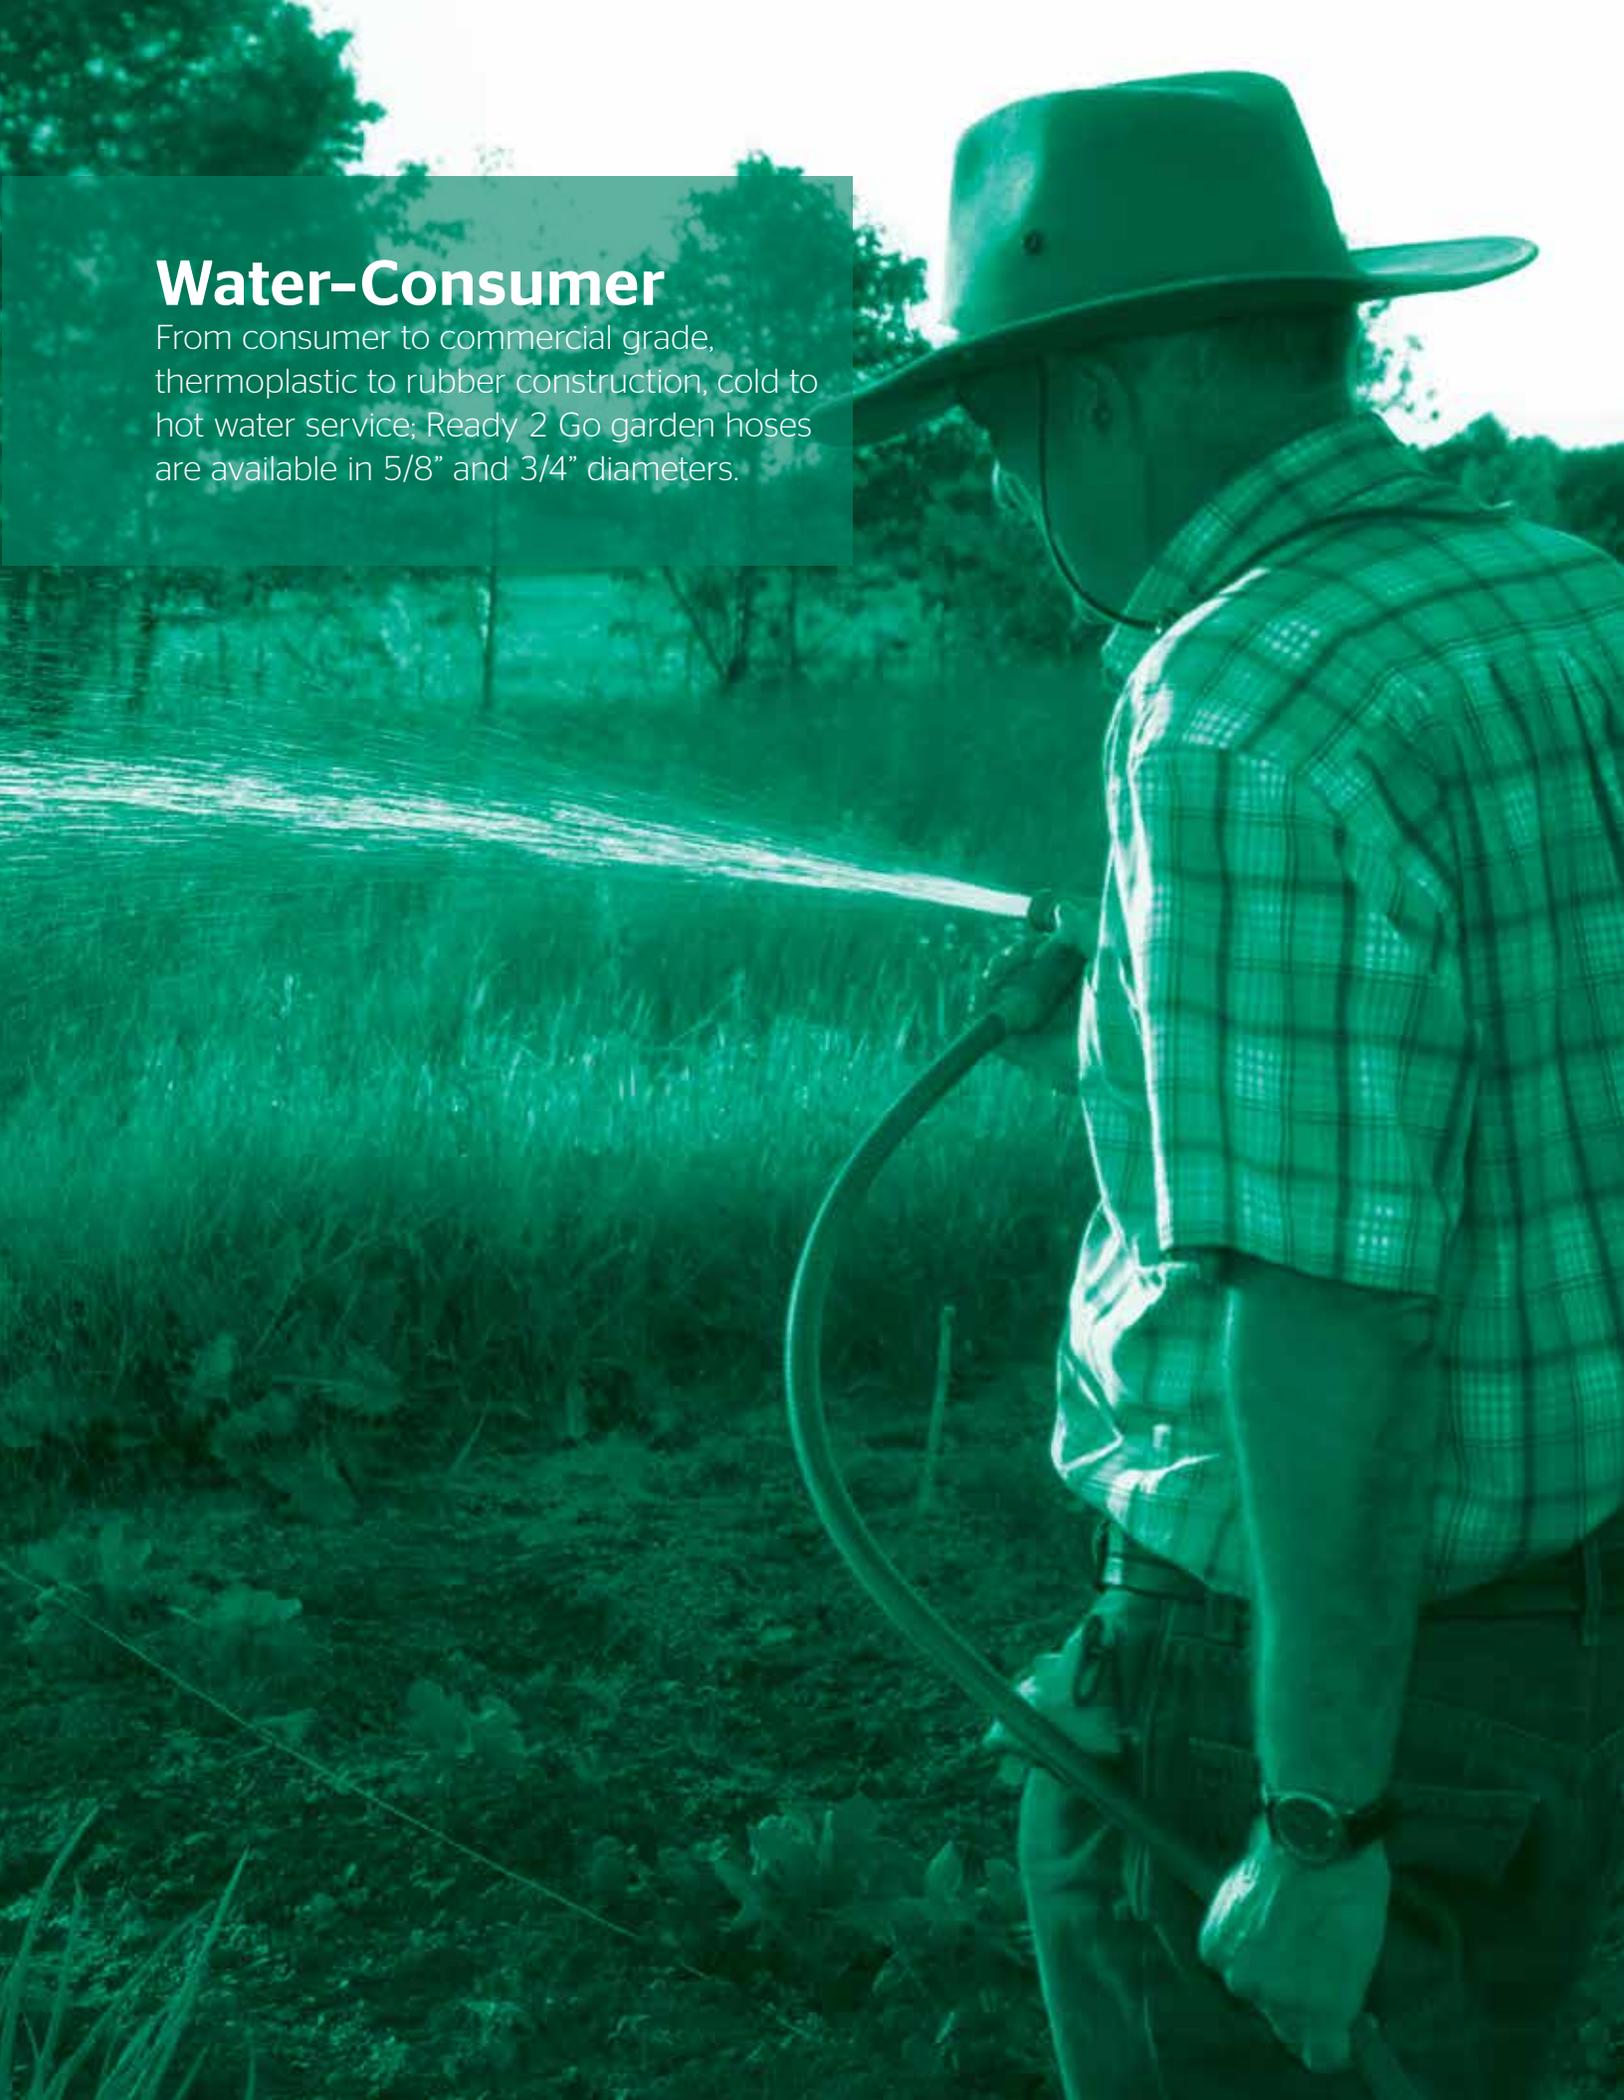

Pathfinder® Garden Hose



For in-home, lawn and garden, apartment, smaller plant, and commercial property applications.

Rated to temperatures of -40°F to 190°F (-40°C to 88°C).

- Tube**
EPDM synthetic rubber
- Cover**
Green EPDM synthetic rubber
- Reinforcement**
Spiral synthetic yarn

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|------------------------|----------|------------|---------|--------------------|--------|------------|
| | | | in. | | ft. | |
| Pathfinder Garden Hose | 20026217 | Green | 5/8" | MXF Brass 5/8" NPT | 50' | 569-027 |

YardMaster™ Garden Hose



Experience the next generation of garden hose. Rated to temperatures of -40°F to 158°F (-40°C to 70°C).

- Length**
50'
- Size**
5/8"
- Features**
 - › Thermoplastic Elastomer hybrid materials
 - › 20% lighter than rubber garden hoses
 - › Improved flexibility at low temperatures

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|--------------|----------|------------|---------|--------------------|--------|------------|
| | | | in. | | ft. | |
| Yardmaster | 20583057 | Green | 5/8" | MXF Brass 5/8" NPT | 50' | 540-453 |
| Yardmaster | 20530170 | Green | 1/2" | MXF Brass 1/2" NPT | 50' | 540-453 |

Heavy Duty + Cold Water Premium Rubber Hose Heavy Duty Abrasion Resistance



A commercial premium rubber hose. Rated to temperatures of -40°F to 160°F (-40°C to 71°C).

Features

- › Reinforced for high burst strength
- › Abrasion-and weather-resistant
- › Crush-resistant brass fittings
- › 5/8" inside diameter

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|--------------------------|----------|------------|------------|--------------------|------------|------------|
| | | | in. | | ft. | |
| Prem. Rubber Garden Hose | 20582671 | Black | 5/8" | MXF Brass 5/8" NPT | 50' | 569-029 |

Heavy Duty + Hot Water Premium Rubber Hose Hot Water



A premium hot water hose. Rated to temperatures of -40°F to 190°F (-40°C to 88°C).

Length

50'

Size

5/8"

Features

- › Premium hot water hose
- › Abrasion resistant
- › Flexible in cold temperatures
- › Internal spring coil prevents kinking at faucet
- › Crush-resistant brass fittings

| Product Name | Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|----------------------------|----------|------------|------------|--------------------|------------|------------|
| | | | in. | | ft. | |
| Comm. Grade Hot Water Hose | 20582672 | Red | 5/8" | MXF Brass 5/8" NPT | 50' | 569-028 |

Welding

Meeting your RMA IP-7 Welding Grade T and Grade R needs, Continental ContiTech branded welding hose is available in dual green and red in 3/8" or 1/4" diameters to 200 PSI working pressure.



Twin-Line

Welding Grade R-Type VD



For welding service. Meets RMA IP-7 standard for Grade R welding hose. Rated to temperatures of -40°F to 120°F (-40°C to 49°C).

Tube

EPDM synthetic rubber compatible with oxygen and acetylene gases

Cover

EPDM synthetic rubber smooth surface

Reinforcement

Spiral synthetic yarn

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|--------------------------------|----------|------------|----------------|---------------------------|---------------|------------|
| Twin-Line Welding Hose Grade R | 20027151 | Red/Green | 1/4" | 1/4" Grade R Type BB Fit. | 25' | 569-588 |
| Twin-Line Welding Hose Grade R | 20027152 | Red/Green | 1/4" | 1/4" Grade R Type BB Fit. | 50' | 569-588 |
| Twin-Line Welding Hose Grade R | 20027153 | Red/Green | 1/4" | 1/4" Grade R Type BB Fit. | 100' | 569-588 |

Twin-Line

Welding Grade T-Type VD



For welding service. Meets RMA IP-7 and CGA E-1 standards for Grade T welding hose. Non-Conductive. Rated to temperatures of -40°F to 120°F (-40°C to 49°C).

Tube

Synthetic rubber compatible with all common welding fuel gases

Cover

Chemivic™ synthetic rubber smooth cover

Reinforcement

Spiral synthetic yarn

| Product Name | Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|--------------------------------|----------|------------|----------------|---------------------------|---------------|------------|
| Twin-Line Welding Hose Grade T | 20027453 | Red/Green | 1/4" | 1/4" Grade T Type BB Fit. | 50' | 569-618 |
| Twin-Line Welding Hose Grade T | 20027454 | Red/Green | 1/4" | 1/4" Grade T Type BB Fit. | 100' | 569-618 |
| Twin-Line Welding Hose Grade T | 20027493 | Red/Green | 3/8" | 3/8" Grade T Type BB Fit. | 25' | 569-618 |
| Twin-Line Welding Hose Grade T | 20027495 | Red/Green | 3/8" | 3/8" Grade T Type BB Fit. | 50' | 569-618 |
| Twin-Line Welding Hose Grade T | 20027497 | Red/Green | 3/8" | 3/8" Grade T Type BB Fit. | 100' | 569-618 |

Welding Hose Compatibility Chart

| | Oxygen Green | Acetylene Red | Fuel Gases* Red | Flame & Oil Resistant Tube | Flame & Oil Resistant Tube |
|------------------------|-----------------|------------------|--------------------|----------------------------|----------------------------|
| Twin Line (Grade R) | Yes | Yes | No | No | No |
| Twin Line (Grade RM) | Yes | Yes | No | No | Yes |
| Twin Line (Grade T) | Yes | Yes | Yes | Yes | Yes |
| Single Line (Grade R) | Yes | Yes | No | No | No |
| Single Line (Grade RM) | Yes | Yes | No | No | Yes |
| Single Line (Grade T) | Yes | Yes | Yes | Yes | Yes |

*Fuel gases are defined in RMA IP-7 welding hose standard. Flammable compressed gases commonly used in the welding and cutting industry including, but not limited to, acetylene, hydrogen, methane/natural gas, LP gas, propylene and methylacetylene propadiene stabilized. RMA IP-7 and CGA E-1

ContiTech



Contact

ContiTech AG
NAFTA Headquarters
703 S. Cleveland Massillon Road
Fairlawn, OH 44333-3023 U.S.A.
1-800-235-4632

Canada

1-888-275-4397
FAX 1-888-464-4397

Mexico

1-800-439-7373
FAX 1-800-062-0918

Germany

+49 (0)511 938 02
mailservice@contitech.de

www.contitech.us

ContiTech. Engineering Next Level

As a division of the Continental Group, ContiTech is a recognized innovation and technology leader in natural rubber and plastics. As an industry partner with a firm future ahead of us, we engineer solutions both with and for our customers around the world. Our bespoke solutions are specially tailored to meet the needs of the market. With extensive expertise in materials and processes, we are able to develop cutting-edge technologies while ensuring we make responsible use of resources. We are quick to respond to important technological trends, such as function integration, lightweight engineering and the reduction of complexity, and offer a range of relevant products and services. That way, when you need us, you'll find we're already there.