

EMT Straps

CEC:
Rated for Ordinary Locations

Features

- Snap type-double ribbed.

Standard Materials

- Steel

Standard Finishes

- Zinc plated

CEC Certifications and Compliances


- CSA Standard: C22.2 No. 18
- CSA Certified: 9795

Standard Materials

- Malleable iron

Standard Finishes


- Mechanical galvanized

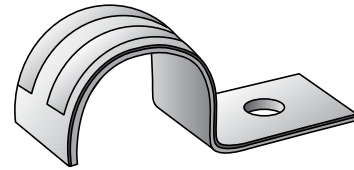

Type 15



Type THTW

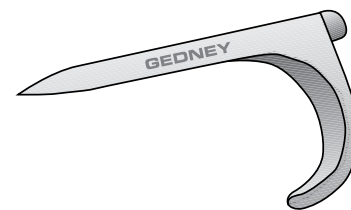


Type 333G


EMT Straps


CEC:
Rated for Ordinary Locations

OSG GEDNEY

COMMERCIAL AND INDUSTRIAL FITTINGS: EMT (ELECTRICAL METALLIC TUBING)

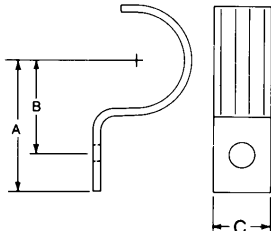	Trade Size (Inches)	Dimensions in Millimeters (Inches)			Bolt Size	Catalog Number
		A	B	C		
 Type 15	1/2	31.75 (1.25)	22.35 (0.88)	14.22 (0.56)	6.35 (0.25)	15-50S
	3/4	35.05 (1.38)	26.92 (1.06)	16.00 (0.63)	6.35 (0.25)	15-75S
	1	41.40 (1.63)	31.75 (1.25)	19.05 (0.75)	6.35 (0.25)	15-100S
	1-1/4	50.80 (2.00)	38.10 (1.50)	22.35 (0.88)	7.87 (0.31)	15-125S
	1-1/2	54.10 (2.13)	42.93 (1.69)	25.40 (1.00)	9.65 (0.38)	15-150S
	2	66.80 (2.63)	50.80 (2.00)	28.70 (1.13)	11.18 (0.44)	15-200S
	2-1/2	111.25 (4.38)	66.80 (2.63)	31.75 (1.25)	12.70 (0.50)	14-250S
	3	120.65 (4.75)	76.20 (3.00)	31.75 (1.25)	12.70 (0.50)	14-300S
	3-1/2	131.83 (5.19)	90.42 (3.56)	38.10 (1.50)	16.00 (0.63)	14-350S
	4	138.18 (5.44)	100.08 (3.94)	38.10 (1.50)	16.00 (0.63)	14-400S

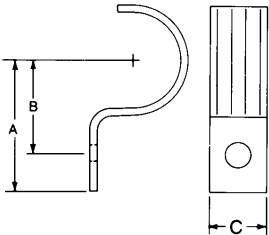Dimensions in Millimeters (Inches)						
Trade Size (Inches)	A	B	C	Bolt Size	Catalog Number	
Two Hole						
 Type THTW	1/2	40.39 (1.59)	54.10 (2.13)	16.00 (0.63)	4.83 (0.19)	THTW-50S
	3/4	43.69 (1.72)	57.15 (2.25)	16.00 (0.63)	4.83 (0.19)	THTW-75S
	1	54.86 (2.16)	73.15 (2.88)	18.29 (0.72)	6.35 (0.25)	THTW-100S
	1-1/4	70.61 (2.78)	88.90 (3.50)	18.29 (0.72)	6.35 (0.25)	THTW-125S
	1-1/2	80.26 (3.16)	95.25 (3.75)	18.29 (0.72)	6.35 (0.25)	THTW-150S
	2	96.77 (3.81)	113.54 (4.47)	18.29 (0.72)	6.35 (0.25)	THTW-200S
	2 1/2	119.13 (4.69)	145.29 (5.72)	25.4 (1.00)	7.87 (0.31)	THR-250S
	3	144.53 (5.69)	171.45 (6.75)	25.4 (1.00)	7.87 (0.31)	THR-300S
	3-1/2	160.27 (6.31)	185.67 (7.31)	25.4 (1.00)	7.87 (0.31)	THR-350S
	4	173.74 (6.84)	198.37 (7.81)	25.4 (1.00)	7.87 (0.31)	THR-400S

	Trade Size (Inches)	Dimensions in Millimeters (Inches)		Catalog Number
		Nail Length	Nominal Thickness	
 Type 333G	1/2	55.63 (2.19)	4.83 (0.19)	333G
	3/4	63.50 (2.5)	4.83 (0.19)	334G
	1	73.15 (2.88)	4.83 (0.19)	335G

EMT Malleable Iron Straps and Spacers

CEC:
Rated for Ordinary Locations

CEC:
Rated for Ordinary Locations

Type 15-G

Standard Materials


- Malleable iron

Standard Finishes


- Hot dip galvanized

CEC Certifications and Compliances

- CSA Standard: C22.2 No. 18
- CSA Certified: 9795

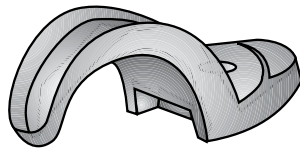

Illustrated Dimensions

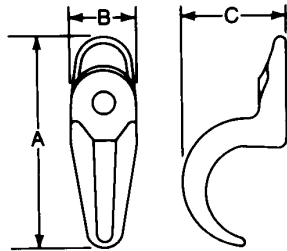

Type 141G

Standard Materials


- Malleable iron or cast iron

Standard Finishes


- Mechanically galvanized or hot dip galvanized

CEC Certifications and Compliances

- CSA Standard: C22.2 No. 18
- CSA Certified: 9795

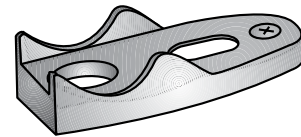

Illustrated Dimensions

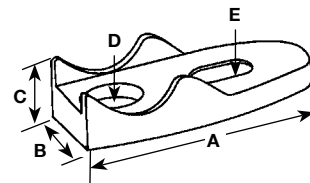


EMT Malleable Iron Straps and Spacers

CEC:
Rated for Ordinary Locations


0ZGEDNEY

COMMERCIAL AND INDUSTRIAL FITTINGS: EMT (ELECTRICAL METALLIC TUBING)



Type 15-G

Trade Size (Inches)	Dimensions in Millimeters (Inches)				Bolt Size	Catalog Number
	A	B	C			
1/2	49.28 (1.94)	19.05 (0.75)	22.35 (0.88)		6.35 (0.25)	15-50G
3/4	56.39 (2.22)	18.29 (0.72)	28.70 (1.13)		6.35 (0.25)	15-75G
1	64.26 (2.53)	19.05 (0.75)	34.04 (1.34)		6.35 (0.25)	15-100G
1-1/4	65.79 (2.59)	19.81 (0.78)	34.04 (1.34)		7.87 (0.31)	15-125G
1-1/2	82.55 (3.25)	22.35 (0.88)	49.28 (1.94)		9.65 (0.38)	15-150G
2	96.01 (3.78)	25.40 (1.00)	61.98 (2.44)		11.18 (0.44)	15-200G
2-1/2	150.88 (5.94)	35.05 (1.38)	77.72 (3.06)		12.70 (0.50)	14-250G ①
3	188.98 (7.44)	41.40 (1.63)	96.77 (3.81)		12.70 (0.50)	14-300G ①
3-1/2	208.03 (8.19)	45.97 (1.81)	111.25 (4.38)		16.00 (0.63)	14-350G ①
4	220.73 (8.69)	50.80 (2.00)	127.00 (5.00)		16.00 (0.63)	14-400G ①



Type 141G

Trade Size (Inches)	Dimensions in Millimeters (Inches)					Catalog Number
	A	B	C	D	E	
1/2	35.81 (1.41)	26.92 (1.06)	11.18 (0.44)	9.65 (0.38)	9.65 (0.38) x 14.22 (0.56)	141G
3/4	63.50 (2.50)	28.7 (1.13)	12.70 (0.50)	9.65 (0.38)	11.18 (0.44) x 14.22 (0.56)	142G
1	81.03 (3.19)	30.99 (1.22)	14.22 (0.56)	9.65 (0.38)	11.18 (0.44) x 19.05 (0.75)	143G
1-1/4	93.73 (3.69)	35.81 (1.41)	17.78 (0.70)	12.70 (0.50)	12.70 (0.50) x 19.05 (0.75)	144G
1-1/2	100.08 (3.94)	39.62 (1.56)	20.57 (0.81)	14.22 (0.56)	13.97 (0.55) x 23.88 (0.94)	145G
2	130.30 (5.13)	50.8 (2.00)	19.05 (0.75)	14.22 (0.56)	16.00 (0.63) x 25.4 (1.00)	146G
2-1/2	146.05 (5.75)	62.74 (2.47)	19.05 (0.75)	11.94 (0.47)	16.00 (0.63) x 28.7 (1.13)	147G
3	181.10 (7.13)	71.37 (2.81)	20.57 (0.81)	11.94 (0.47)	16.00 (0.63) x 28.7 (1.13)	148G
3-1/2	203.20 (8.00)	81.79 (3.22)	24.64 (0.97)	11.94 (0.47)	17.53 (0.69) x 34.04 (1.34)	149G
4	222.25 (8.75)	86.61 (3.41)	24.64 (0.97)	11.94 (0.47)	18.29 (0.72) x 32.51 (1.28)	150G
5	254.00 (10.00)	94.49 (3.72)	30.48 (1.20)	12.70 (0.50)	18.29 (0.72) x 32.51 (1.28)	151G
6	299.97 (11.81)	100.08 (3.94)	38.10 (1.50)	12.70 (0.50)	31.75 (1.25) x 50.8 (2.00)	152G

① Suitable for use with rigid conduit or IMC.

② Cast Iron.