

Mogul Conduit Bodies with Cover and Gasket

LR Type - Hot Dip Galvanized - Malleable Iron

Features

- c(UL)us wet locations
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

Applications

- Use to pull straight or 90° angle turns or making taps and splices
- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

Standard Material



- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

Standard Finish

- Hot dip galvanized

Applicable Third Party Standards

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R
- CSA Standard C22.2 No. 18.3; CSA certified

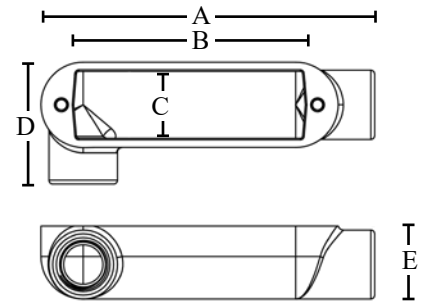

Catalog Number	UPC	Size	Max. Number	Max. Size	Internal Volume (in ³)	Ship Case	Weight/Case	A	B	Inches C	D	E
MLR3CGHDG	00989	1"	3	4 AWG	19	1	4	8.62	5.98	1.71	3.12	1.87
MLR4CGHDG	00990	1-1/4"	3	2 AWG	25	1	6	8.62	5.98	1.71	3.12	2.31
MLR5CGHDG	00991	1-1/2"	3	1/0 AWG	57	1	10	12.72	10	2.26	4.08	2.58
MLR6CGHDG	00992	2"	3	4/0 AWG	75	1	14	12.72	10	2.26	4.08	3.17