

# Mogul Conduit Bodies with Cover and Gasket

## C Type with Rollers - Hot Dip Galvanized - Malleable Iron

### Features

- c(UL)us wet locations
- Built in cable pulling roller
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

### Applications

- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

### Standard Material


- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

### Standard Finish

- Hot dip galvanized

### Applicable Third Party Standards

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R
- CSA Standard C22.2 No. 18.3; CSA certified

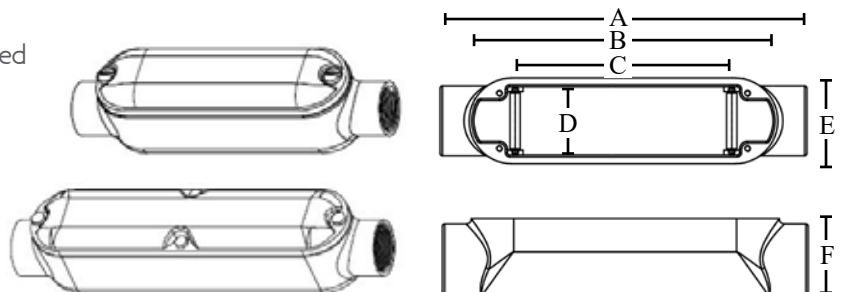

| Catalog Number   | UPC   | Size          | Max. Number | Max. Size | Internal Volume (in <sup>3</sup> ) | Ship Case | Weight/Case | Inches |       |       |      |      |      |
|------------------|-------|---------------|-------------|-----------|------------------------------------|-----------|-------------|--------|-------|-------|------|------|------|
|                  |       |               |             |           |                                    |           |             | A      | B     | C     | D    | E    | F    |
| <b>MC3CGHDG</b>  | 00956 | <b>1"</b>     | 3           | 4 AWG     | 19                                 | 1         | 4           | 9.57   | 5.98  | ---   | 1.71 | 2.19 | 1.88 |
| <b>MC4CGHDG</b>  | 00957 | <b>1-1/4"</b> | 3           | 2 AWG     | 25                                 | 1         | 6           | 9.57   | 5.98  | ---   | 1.71 | 2.19 | 2.13 |
| <b>MC5CGHDG</b>  | 00958 | <b>1-1/2"</b> | 3           | 1/0 AWG   | 57                                 | 1         | 10          | 13.75  | 10    | 9.17  | 2.27 | 3.03 | 2.58 |
| <b>MC6CGHDG</b>  | 00959 | <b>2"</b>     | 3           | 4/0 MCM   | 75                                 | 1         | 14          | 13.75  | 10    | 9.17  | 2.27 | 3.03 | 3.17 |
| <b>MC7CGHDG</b>  | 00960 | <b>2-1/2"</b> | 3           | 300 MCM   | 163                                | 1         | 29          | 18.40  | 15    | 10.86 | 3.41 | 4.27 | 3.76 |
| <b>MC8CGHDG</b>  | 00961 | <b>3"</b>     | 3           | 300 MCM   | 211                                | 1         | 38          | 18.40  | 15    | 10.86 | 3.41 | 4.27 | 4.57 |
| <b>MC9CGHDG</b>  | 00965 | <b>3-1/2"</b> | 3           | 350 MCM   | 375                                | 1         | 56          | 23.19  | 19.98 | 15.08 | 4.29 | 5.31 | 5.03 |
| <b>MC10CGHDG</b> | 00963 | <b>4"</b>     | 3           | 350 MCM   | 439                                | 1         | 65          | 23.19  | 19.98 | 15.08 | 4.29 | 5.31 | 5.52 |