



Southwire®

PRODUCT SPECIFICATION

CATALOG NUMBER: 02816 and 02821

DESCRIPTION: Cord connected portable GFCI, with one duplex GFCI receptacle and one standard (GFCI protected) duplex receptacle in a thermoplastic protective housing. Power-on reset is automatic.



APPROVALS: UL 943, Class A Ground Fault Circuit Interrupter; complies with OSHA requirements, including open-neutral protection, for personnel protection in temporary wiring installations

CONSTRUCTION PARAMETERS:

Cord type:	12/3 SJTW
Cord length:	6 ft.
Cord color:	Yellow
Attachment plug configuration:	NEMA 5-15P (02816), NEMA L5-20P (02821)
Attachment plug color:	Yellow (02816), Black (02821)
Receptacle configuration:	NEMA 5-15R x 4 (02816), NEMA 5-20R x 4 (02821)
Housing material:	ABS
Housing color:	Yellow
Receptacle protection:	Spring-loaded cover provides protection when not in use; sloping top repels rain

ELECTRICAL & ENVIRONMENTAL PROPERTIES:

Temperature rating:	-30 to +60 °C
Operating environment:	Outdoor, if protected from water entry
Nominal operating voltage:	120 VAC / 60 Hz
Maximum operating current:	15 A (02816), 20 A (02821)
Maximum operating wattage:	1800 W (02816), 2400 W (02821)

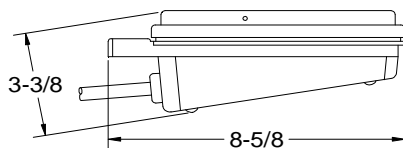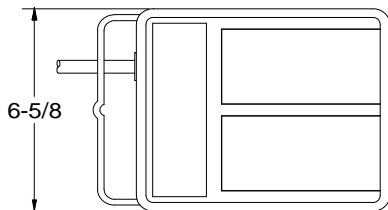

Nominal dimensions



02821 shown

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part.

We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is the proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without the written consent of Southwire Company, LLC.