




Southwire®

PRODUCT SPECIFICATION

CATALOG NUMBER: See table below
DESCRIPTION: Hi Visibility-Lo Temp extension cord with enhanced cold temperature flexibility and a power indicator light in the cord connector
APPROVALS: UL Listed and CSA Certified, or UL/CUL Listed, Outdoor Use Cord Set

CONSTRUCTION PARAMETERS:

Conductor: SJTW, see table below for gauge
Cable jacket material: Low temperature PVC, light blue
Cord rating: Hard Usage per the National Electrical Code
Cable legend type: Indent print

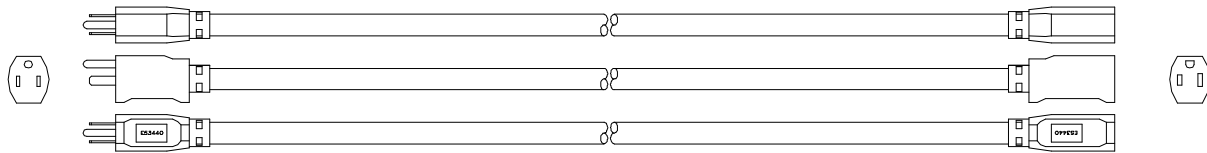

Note: Plug style may vary

Attachment plug configuration: NEMA 5-15P
Cord connector configuration: NEMA 5-15R
Plug and connector material: Clear PVC, with neon power indicator lamp in the connector

ELECTRICAL AND ENVIRONMENTAL PROPERTIES:

Cable temperature rating: -50 to +60 °C
Nominal operating voltage: 125 VAC
Maximum operating current: See table below

Catalog no.	Gauge	Length	Current rating	Case qty	UPC
23678806	16/3	25 ft	13A	12	0 29892 02367 6
23688806		50 ft		12	0 29892 02368 3
23698806		100 ft		6	0 29892 02369 0
24678806	14/3	25 ft	15A	6	0 29892 02467 3
24688806		50 ft		6	0 29892 02468 0
24698806		100 ft		3	0 29892 02469 7
25680006	12/3	50 ft	15A	4	0 29892 02568 7
25690006		100 ft		4	0 29892 02569 4

This product complies with European Directive 2011/65/EU (RoHS-2,

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part.

We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is the proprietary intellectual property of Southwire Company LLC. Any information contained herein shall not be disclosed to any party without the written consent of Southwire Company LLC.