




## PRODUCT SPECIFICATION

Controlled Document - Engineering Drive

**CATALOG NUMBER:** See table below  
**DESCRIPTION:** Cord set with locking connector  
**APPROVALS:** UL/CUL Listed Outdoor Use Cord Set

### CONSTRUCTION PARAMETERS:

Cable type: SJTW, see table below for gauge  
 Conductors: See table below  
 Cable jacket material: PVC  
 Cable jacket color: See table below  
 Overall cable O.D. (nom): See table below  
 Cord rating: Hard Usage per the National Electrical Code  
 Cable legend type: Indent print

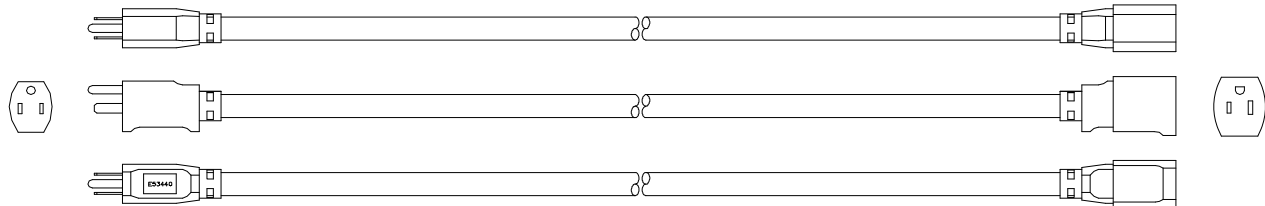

Cord set length: See table below  
 Attachment plug configuration: NEMA 5-15P  
 Cord connector configuration: NEMA 5-15R  
 Plug and connector material: PVC  
 Plug and connector color: Black

### ELECTRICAL AND ENVIRONMENTAL PROPERTIES:

Cable temperature rating: -40 to +60 °C  
 Nominal operating voltage: 125 VAC  
 Maximum operating current: See table below

Catalog no.	Gauge	Color	Length	Conductor	Cable O.D.	Current rating
02438	14/3	Yellow w/ blue stripe	50 ft	41/30 BC	0.352 in	15A
02439			100 ft			13A
02538	12/3	Yellow w/ black stripe	50 ft	65/30 BC	0.420 in	15A
02539			100 ft			

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Inc. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Inc.