
SELECTION/DIMENSIONS


DODGE®




GRIP TIGHT Adapter Ball Bearings
GT NORMAL DUTY WIDE SLOT TAKE-UP BEARINGS

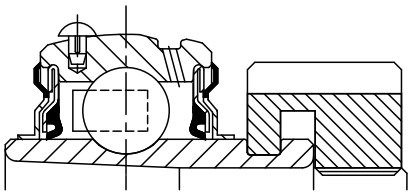

Lube Fitting Thread Size -
1/8 - 27 NPT

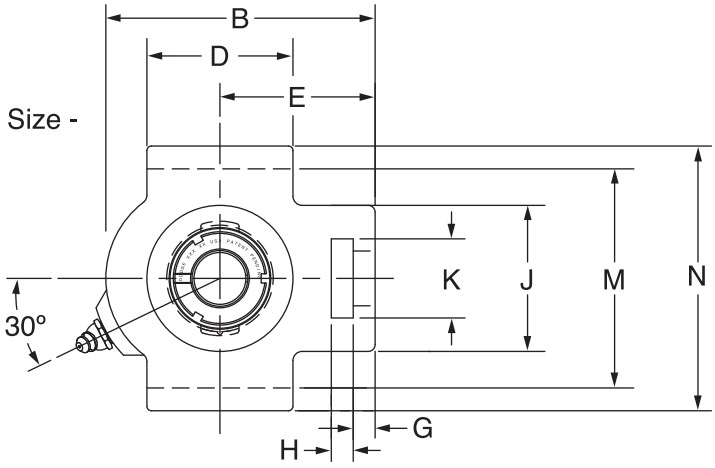

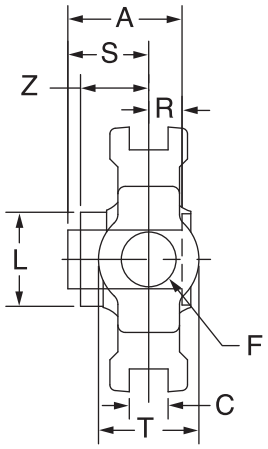

Series	Shaft Size	Complete Unit		Unit without Adapter Sleeve & Lock Nut		Adapter Sleeve & Lock Nut Assembly	
		Part No.	Description	Part No.	Description	Part No.	Description
204	3/4	**136130**	WSTU-GT-012	**136219**	WSTU-GT-04	***136522***	AN-GT-04-012-D
	20mm	***136247***	*WSTU-GT-20M*			***136553***	*AN-GT-04-20M*-D
205	7/8	**136131**	WSTU-GT-014	**136220**	WSTU-GT-05	**136590**	AN-GT-05-014-D
	15/16	**136132**	WSTU-GT-015			**136523**	AN-GT-05-015-D
	1	**136133**	WSTU-GT-100			**136524**	AN-GT-05-100-D
	25mm	***136248***	*WSTU-GT-25M*			***136554***	*AN-GT-05-25M*-D
206	1-1/8	**136134**	WSTU-GT-102	**136221**	WSTU-GT-06	**136525**	AN-GT-06-102-D
	1-3/16	**136135**	WSTU-GT-103			**136526**	AN-GT-06-103-D
	1-1/4	**136136**	WSTU-GT-104S			**136527**	AN-GT-06-104S-D
	30mm	***136249***	*WSTU-GT-30M*			***136555***	*AN-GT-06-30M*-D
207	1-1/4	**136137**	WSTU-GT-104	**136222**	WSTU-GT-07	**136528**	AN-GT-07-104-D
	1-3/8	**136138**	WSTU-GT-106			**136591**	AN-GT-07-106-D
	1-7/16	**136139**	WSTU-GT-107			**136529**	AN-GT-07-107-D
	35mm	***136250***	*WSTU-GT-35M*			***136556***	*AN-GT-07-35M*-D
208	1-1/2	**136140**	WSTU-GT-108	**136223**	WSTU-GT-08	**136530**	AN-GT-08-108-D
	1-5/8	**136141**	WSTU-GT-110			**136592**	AN-GT-08-110-D
	40mm	***136251***	*WSTU-GT-40M*			***136593***	*AN-GT-08-40M*-D

@ Assembled to order

DODGE®



GRIP TIGHT Adapter Ball Bearings
GT NORMAL DUTY WIDE SLOT TAKE-UP BEARINGS

Series	Shaft Size	Weight lbs *kg*	Take-Up Frame Size	A	B	C	D	E	F Screw Dia.	G	H	J	K	L	M	N	R#	S#	T	Z
204	3/4	1.9	WS300	1.48	3.69	0.531	2.00	2.38	5/8	0.38	0.63	2.00	1.25	1.50	2.985/3.015	3.63	0.46	1.02	1.38	1.03
	20mm	*0.9*		*37.6*	*93.7*	*13.49*	*50.8*	*60.5*	*15.9*	*9.7*	*16.0*	*50.8*	*31.8*	*38.1*	*75.82/76.58*	*92.2*	*11.7*	*25.9*	*35.1*	*26.2*
205	7/8	2.2	WS300	1.46	3.81	0.531	2.00	2.44	5/8	0.38	0.63	2.00	1.31	1.80	2.985/3.015	3.63	0.48	0.98	1.38	1.00
	15/16	2.1																		
	1	2.0																		
	25mm	*1.0*		*37.1*	*96.8*	*13.49*	*50.8*	*62.0*	*15.9*	*9.7*	*16.0*	*50.8*	*33.3*	*45.7*	*75.82/76.58*	*92.2*	*12.2*	*24.9*	*35.1*	*25.4*
206	1-1/8	2.7	WS308	1.61	4.38	0.531	2.25	2.75	3/4	0.38	0.63	2.19	1.44	2.08	3.480/3.510	4.13	0.52	1.09	1.63	1.13
	1-3/16	2.6																		
	1-1/4	2.5																		
	30mm	*1.3*		*40.9*	*111.3*	*13.49*	*57.2*	*69.9*	*19.1*	*9.7*	*16.0*	*55.6*	*36.6*	*52.8*	*88.39/89.15*	*104.9*	*13.2*	*27.7*	*41.3*	*28.7*
207	1-1/4	3.7	WS308	1.62	4.87	0.531	2.50	3.06	3/4	0.50	0.63	2.50	1.44	2.38	3.480/3.510	4.13	0.54	1.08	1.63	1.14
	1-3/8	3.6																		
	1-7/16	3.5																		
	35mm	*1.6*		*41.1*	*123.7*	*13.49*	*63.5*	*77.7*	*19.1*	*12.7*	*16.0*	*63.5*	*36.6*	*60.5*	*88.39/89.15*	*104.9*	*13.7*	*27.4*	*41.3*	*29.0*
208	1-1/2	6.1	WS400	1.84	5.69	0.688	3.25	3.50	1	0.63	0.75	3.25	1.94	2.62	3.985/4.015	4.50	0.61	1.23	1.94	1.23
	1-5/8	5.9																		
	40mm	*2.8*		*46.7*	*144.5*	*17.48*	*82.6*	*88.9*	*25.4*	*16.0*	*19.1*	*82.6*	*49.3*	*66.5*	*101.22/101.98*	*114.3*	*15.5*	*31.2*	*49.3*	*31.2*

#R & S dimensions will vary slightly depending on true shaft diameter.