


"SDS" Q-D BUSHING

THIS DRAWING IS A STANDARD POLYMER TRANSMISSION COMPONENT. DETAILS SHOWN WHICH DO NOT AFFECT DRIVE FUNCTION MAY BE CHANGED WITHOUT ANY NOTIFICATION. CLOSE FITTING OR CUSTOMER MODIFIED STOCK COMPONENT CAN BE ORDERED BY CONTACTING GATES INDUSTRIAL SALE DIVISION.

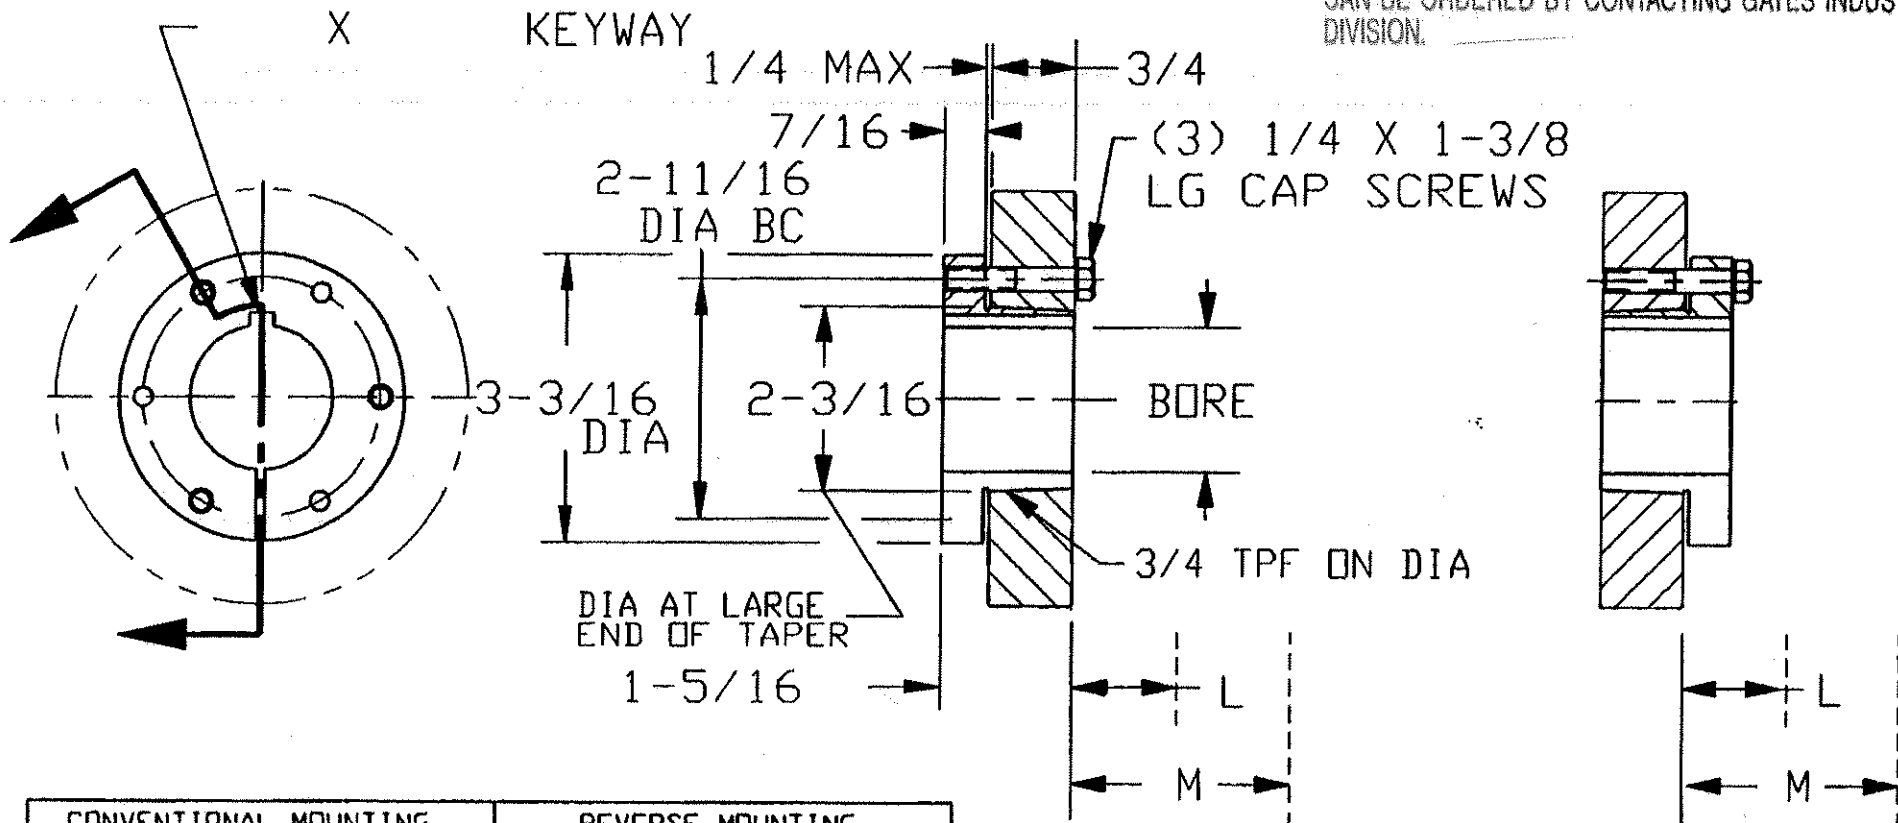

CONVENTIONAL MOUNTING SPACE REQUIRED				REVERSE MOUNTING SPACE REQUIRED			
TO TIGHTEN BUSHING		TO LOOSEN BUSHING		TO TIGHTEN BUSHING		TO LOOSEN BUSHING	
OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH
19/32	2-21/32	1-9/16	3-5/8	1-9/16	3-5/8	2-1/8	4-3/16

CONVENTIONAL MOUNTING

REVERSE MOUNTING

CERTIFIED

CUSTOMER NAME: _____		APPROVED BY: _____		DIST. _____	
CUSTOMER DWG NO.: _____		DATE: _____			
 THE GATES RUBBER CO. DENVER, COLORADO		DR. BY: _____ DATE: _____		DRAWING NO. _____	
		CK. BY: _____			
		APPD. BY: _____			