


"SD" Q-D BUSHING

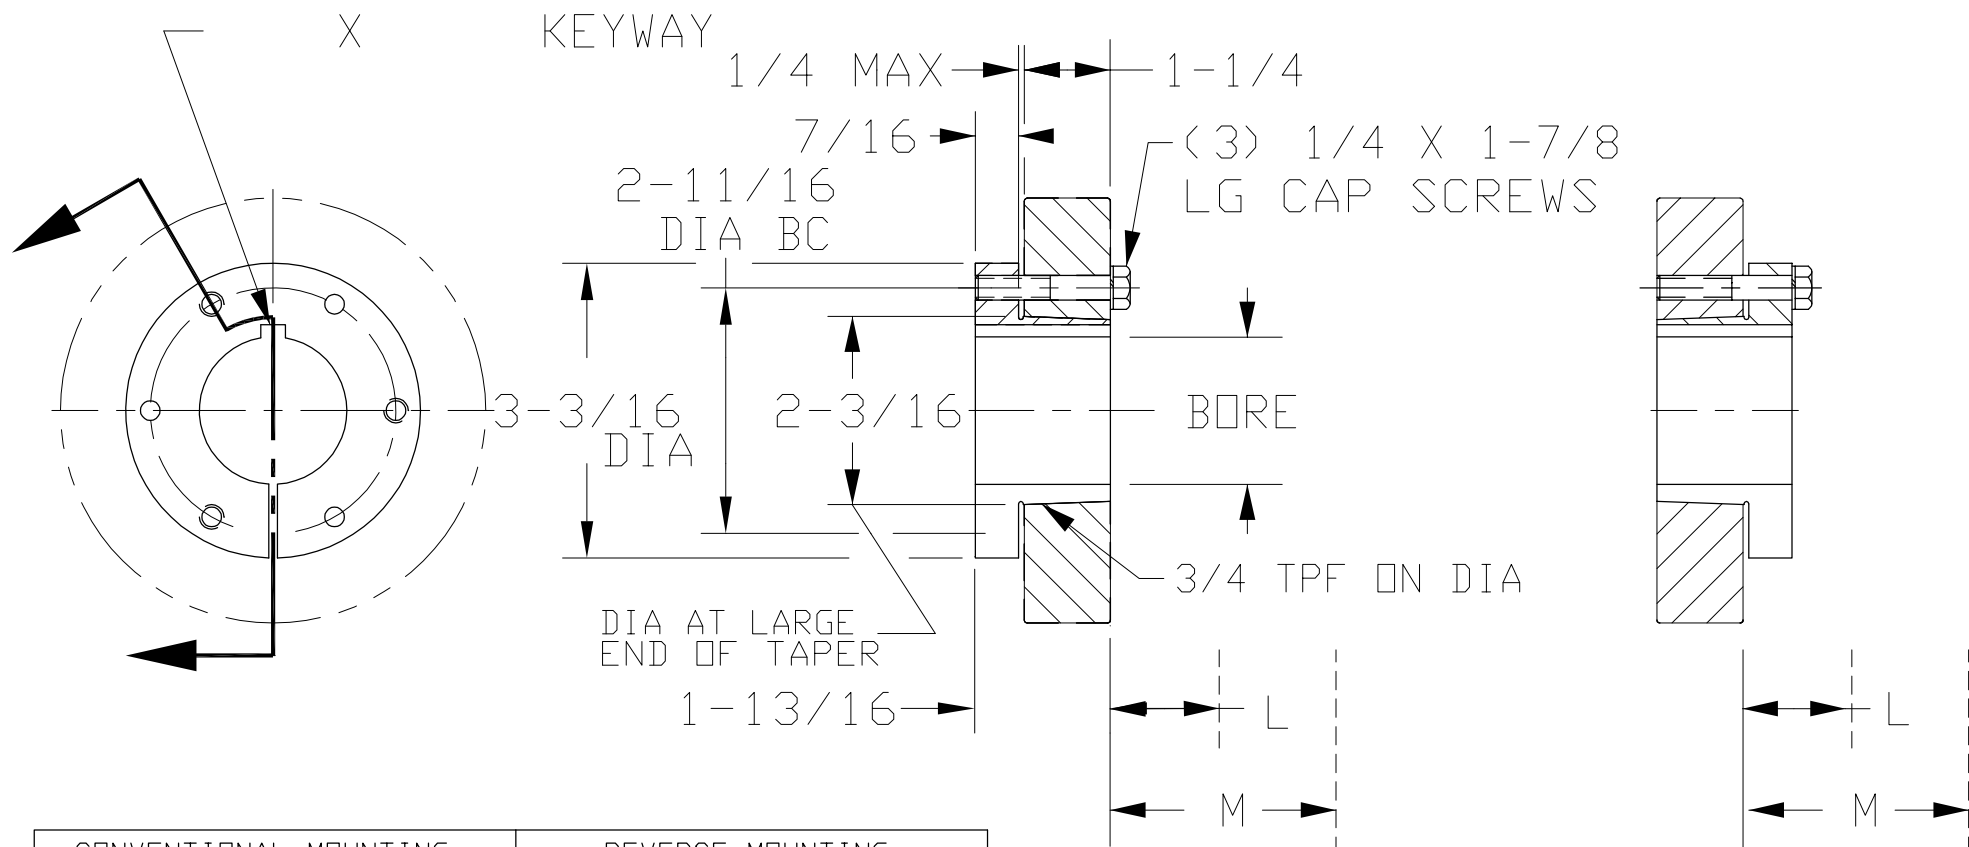


CONVENTIONAL MOUNTING SPACE REQUIRED				REVERSE MOUNTING SPACE REQUIRED			
TO TIGHTEN BUSHING		TO LOOSEN BUSHING		TO TIGHTEN BUSHING		TO LOOSEN BUSHING	
OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH
21/32	2-23/32	2-1/16	4-1/8	2-1/16	4-1/8	2-5/8	4-11/16

CONVENTIONAL MOUNTING

REVERSE MOUNTING

REFERENCE ONLY

DIMENSIONAL/TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE. APPROVAL/CERTIFIED DRAWINGS WILL BE FURNISHED UPON REQUEST.

CUSTOMER NAME:		APPROVED BY _____		DIST.
CUSTOMER DWG NO. :		DATE _____		
 THE GATES RUBBER CO. DENVER, COLORADO	DR. BY _____ DATE _____		DRAWING NO.	
	CK. BY _____			
	APPD. BY _____			