


"SF" Q-D BUSHING

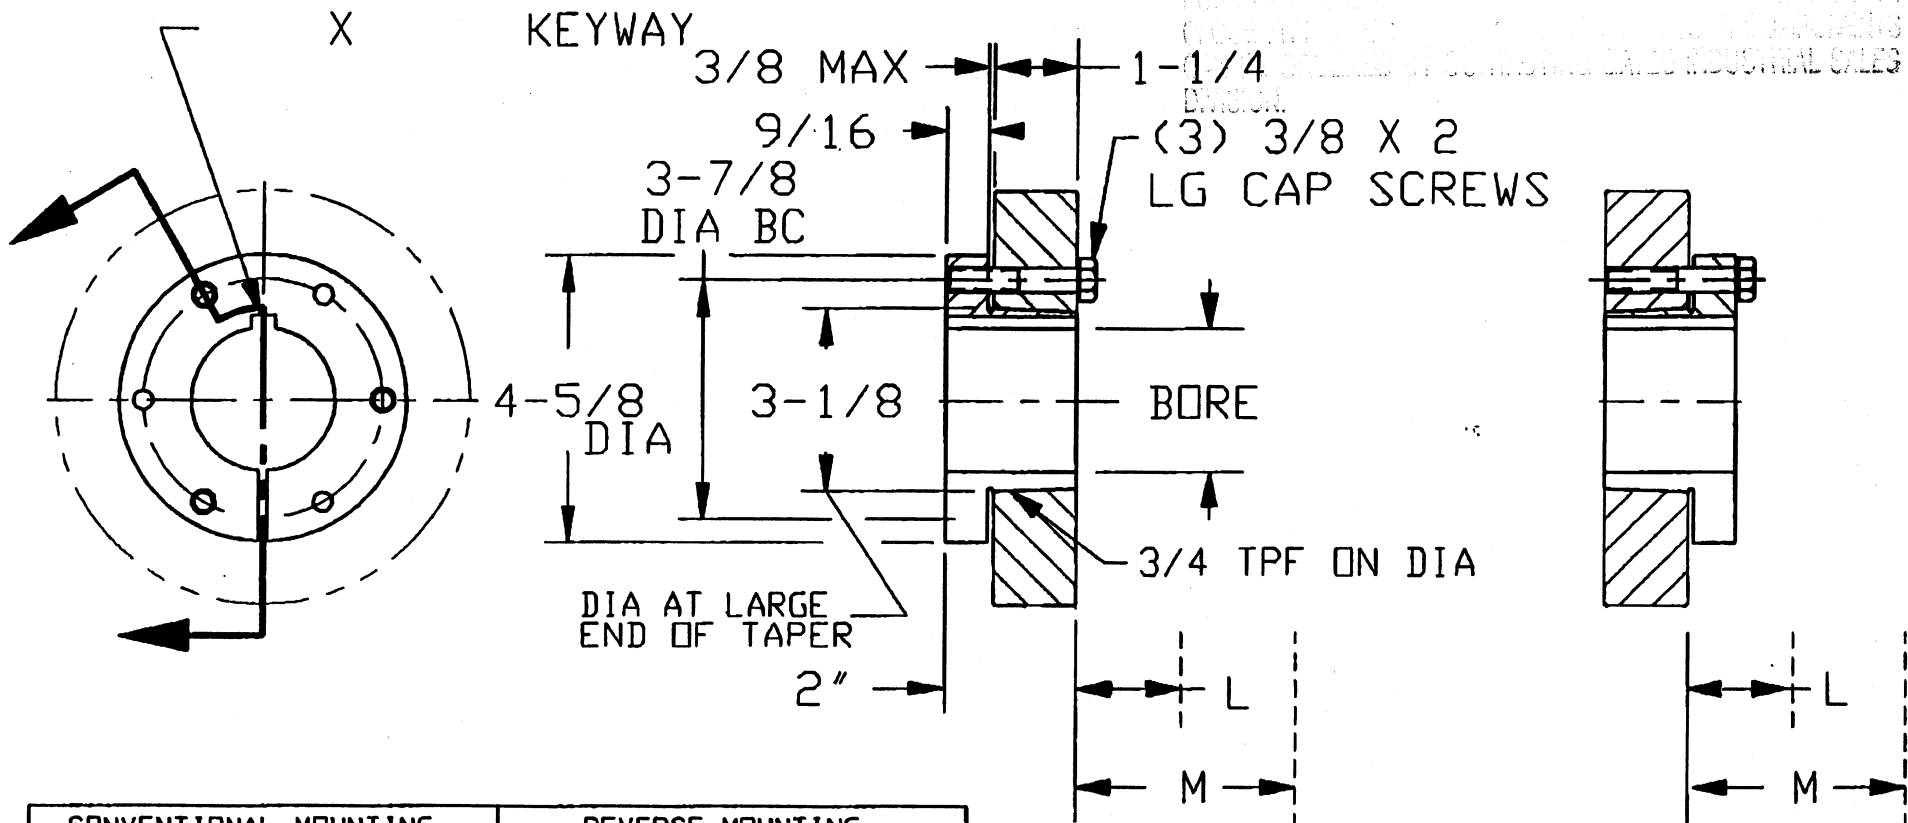

CONVENTIONAL MOUNTING SPACE REQUIRED				REVERSE MOUNTING SPACE REQUIRED			
L TO TIGHTEN BUSHING		M TO LOOSEN BUSHING		L TO TIGHTEN BUSHING		M TO LOOSEN BUSHING	
OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH
29/32	2-29/32	2-3/8	4-3/8	2-7/16	4-7/16	3-5/16	5-5/16

CONVENTIONAL
MOUNTING

REVERSE
MOUNTING

CERTIFIED

CUSTOMER NAME:

CUSTOMER DVG NO.:

APPROVED BY _____

DATE _____

DIST.



THE GATES RUBBER CO.
DENVER, COLORADO

DR. BY _____ DATE _____

CK. BY _____

APPD. BY _____

DRAWING NO.