


"E" Q-D BUSHING

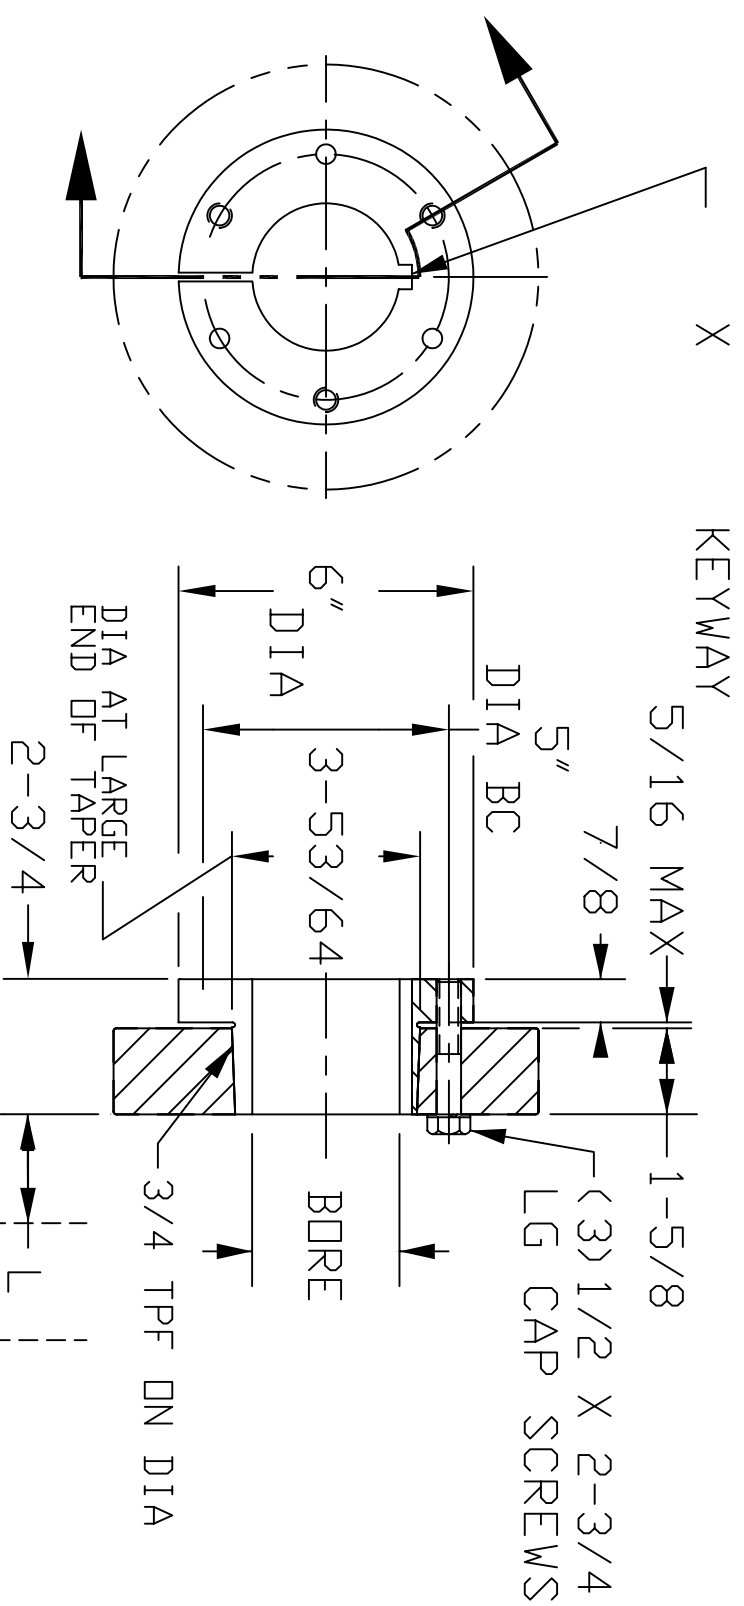

CONVENTIONAL MOUNTING SPACE REQUIRED		REVERSE MOUNTING SPACE REQUIRED	
TO TIGHTEN BUSHING	TO LOOSEN BUSHING	TO TIGHTEN BUSHING	TO LOOSEN BUSHING
OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH
1-1/4	3-3/16	3-1/8	5-1/16

CONVENTIONAL
MOUNTING

REVERSE
MOUNTING

APPROVAL

THE MATERIALS AND INFORMATION, INCLUDING THE PRINCIPALS OF DESIGN PRESENTED, ARE THE EXCLUSIVE PROPERTY OF THE GATES RUBBER COMPANY AND ARE TO BE CONSIDERED AS CONFIDENTIAL INFORMATION. ACCORDINGLY, THIS INFORMATION IS SUBMITTED TO YOU WITH THE AGREEMENT THAT IT IS NOT TO BE REPRODUCED, COPIED, OR LOANED, IN PART OR IN WHOLE, NOR IS THE INFORMATION TO BE RELAYED TO ANY OTHER INDIVIDUAL OR COMPANY. ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO THE ABOVE.

ORDER NO. : _____	PRODUCT	QD Bushing	APPROVED BY	DATE	DIST.
CUSTOMER ORDER NO. : _____	PART	E	DR. BY	MDW	DATE 05/20/2004
			CK. BY		
			APPD. BY	JEM	
					DRAWING NO.
					7839-1XXX



GATES CORPORATION
DENVER, COLORADO