


"J" Q-D BUSHING

THIS DRAWING IS A STANDARD POV TRANSMISSION COMPONENT. DETAILS SHOWN WHICH DO NOT AFFECT DRIVE FUNCTION MAY BE CHANGED WITHOUT ANY NOTIFICATION. CLOSE FITTING OR CUSTOMER MODIFIED STOCK COMPONENTS CAN BE ORDERED BY CONTACTING GATES INDUSTRIAL SALES DIVISION.

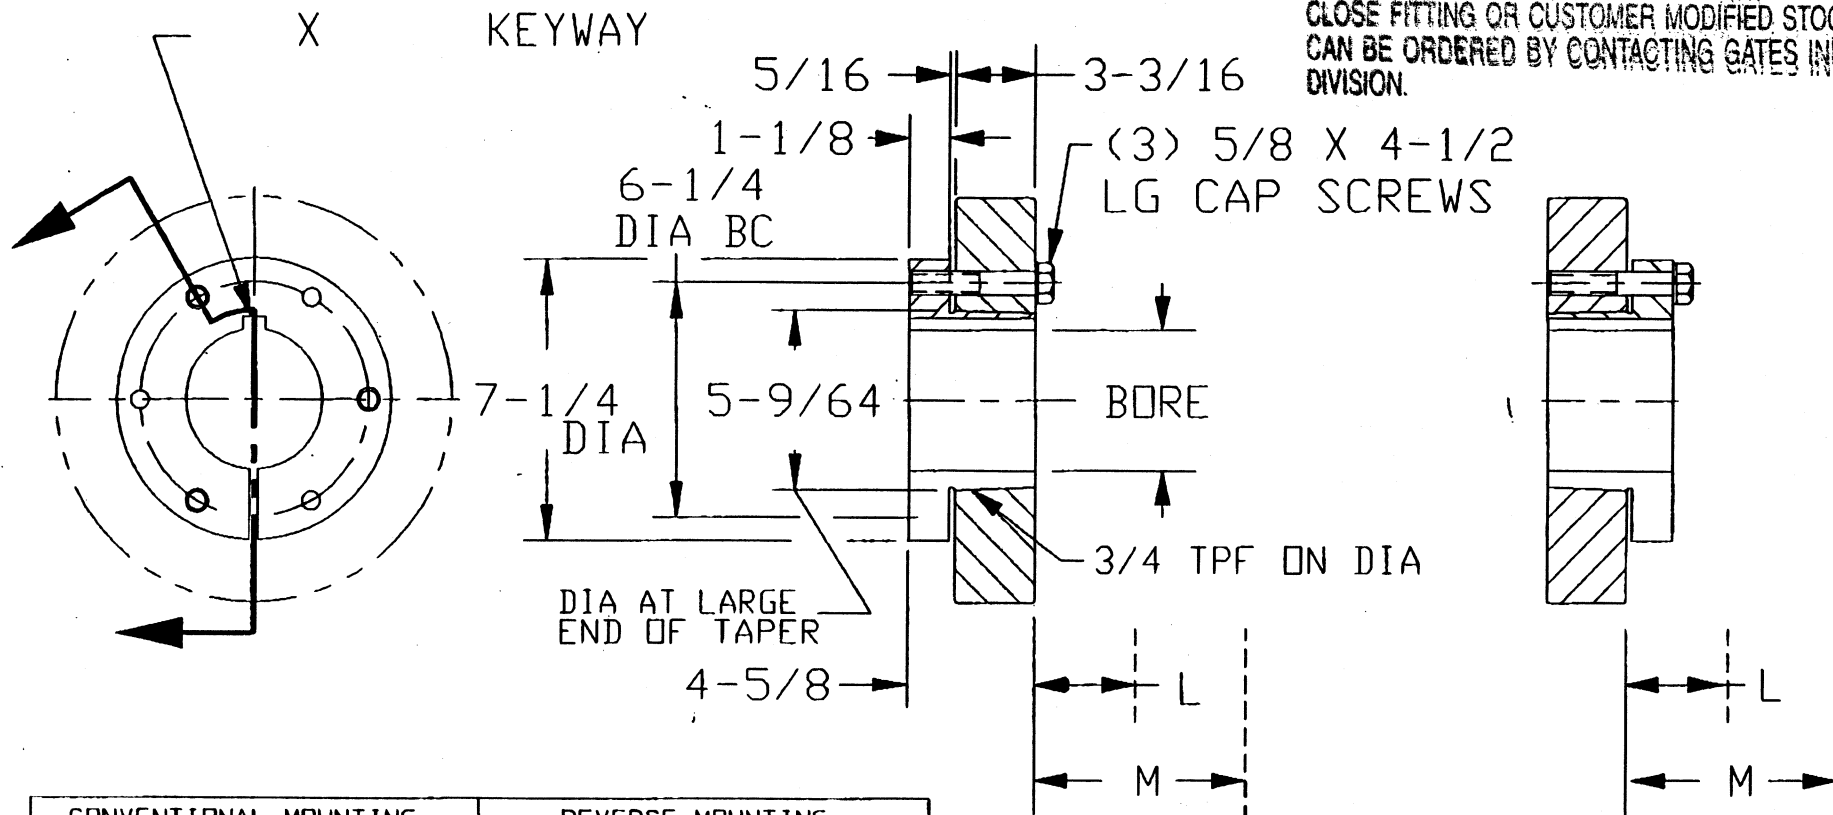

CONVENTIONAL MOUNTING SPACE REQUIRED				REVERSE MOUNTING SPACE REQUIRED			
L TO TIGHTEN BUSHING		M TO LOOSEN BUSHING		L TO TIGHTEN BUSHING		M TO LOOSEN BUSHING	
OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH	OPEN END WRENCH	SOCKET WRENCH
1-13/32	3-7/32	4-15/16	6-3/4	3-15/16	5-3/4	5-1/2	7-5/16

CONVENTIONAL MOUNTING

REVERSE MOUNTING

CERTIFIED

CUSTOMER NAME:
CUSTOMER DVG NO.:

APPROVED BY _____
DATE _____

DIST.



THE GATES RUBBER CO.
DENVER, COLORADO

DR. BY _____ DATE _____
CK. BY _____
APPD. BY _____

DRAWING NO.