
## 7060 TAPER-LOCK BUSHING

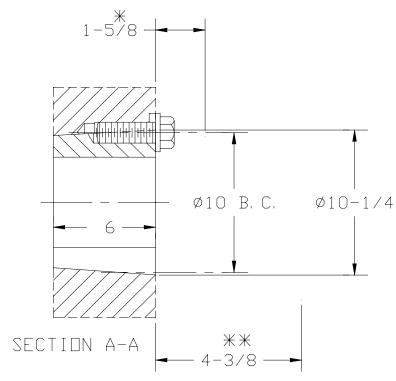

\* SPACE REQD TO TIGHTEN BUSHING ALSO SPACE REQD TO LOOSEN SCREWS TO PERMIT REMOVAL OF HUB BY PULLER

\*\* SPACE REQD TO LOOSEN BUSHING USING TWO SCREWS AS JACKSCREWS-NO PULLER REQD

8? TAPER INCLUDED ANGLE

 $(4)1-1/4-7NC \times 3-1/2 LG HEX HD$ CAP SCREWS FURNISHED W/ BUSHING FOR TIGHTENING ON SHAFT: HUB HALF OF HOLE IS THREADED & BUSHING HALF OF HOLE IS NOT THREADED 33° 80° **/** -USE ONLY (3) SCREWS FOR REMOVING FROM SHAFT: BUSHING HALF OF HOLE IS THREADED HUB HALF OF HOLE IS NOT THREADED BNRF:

CERTIFIED

BUSHING KW:

CUSTOMER NAME:	APPROVED BY DIST.
CUSTOMER DWG NO.:	DATE
THE GATES RUBBER CO	DR. BY DATE DRAWING NO.
DENVER, COLORADO	APPD. BY