
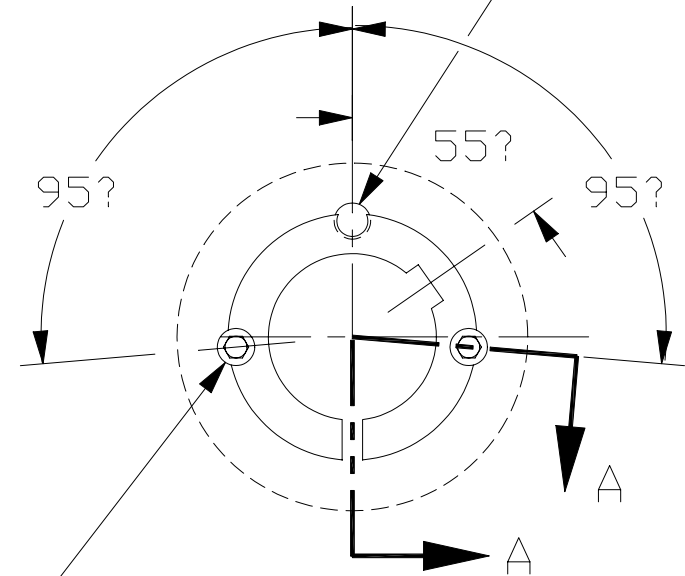


1610 TAPER-LOCK BUSHING

USE ONLY ONE SCREW FOR REMOVING
FROM SHAFT:
BUSHING HALF OF HOLE IS THREADED &
HUB HALF OF HOLE IS NOT THREADED

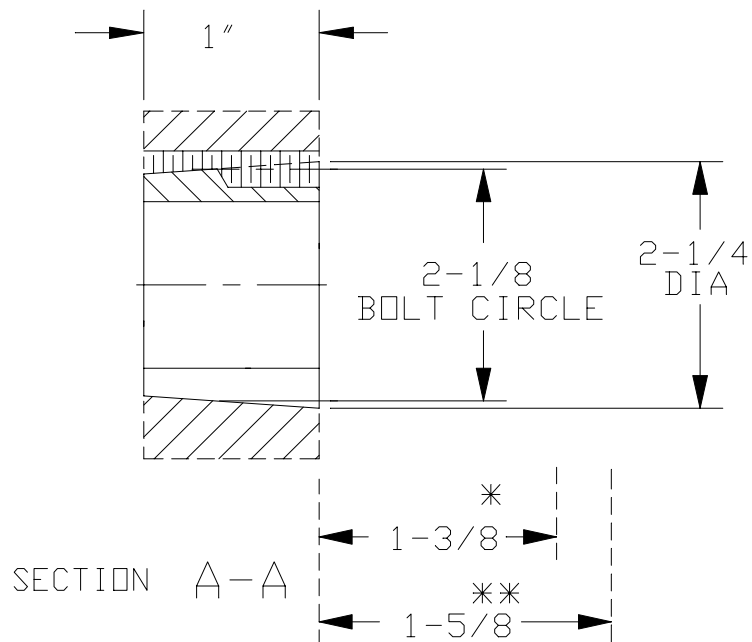

(2) 3/8-16 NC X 5/8 LG SET SCREWS
FURN W/ BUSH TO TIGHTEN ON SHAFT
(HUB HALF OF HOLE IS THREADED &
BUSH HALF OF HOLE IS NOT THREADED)

BORE:
BUSHING KW:

CERTIFIED

- * SPACE REQD TO TIGHTEN BUSHING
ALSO SPACE REQD TO LOOSEN SCREWS TO
PERMIT REMOVAL OF HUB BY PULLER.
- ** SPACE REQD TO LOOSEN BUSHING USING
ONE SCREW AS JACKSCREW-NO PULLER REQD.

8? INCLUDED ANGLE

CUSTOMER NAME:

CUSTOMER DWG NO. :



THE GATES RUBBER CO.
DENVER, COLORADO

APPROVED BY _____

DATE _____

DR. BY _____ DATE _____
CK. BY _____
APPD. BY _____

DRAWING NO.

DIST.