

## **Standard Construction Features**

Belt Type: Synchronous


Core Material: Oil & Heat Resistant (chloroprene)

Cord/Tensile: Fiberglass


Jacket: Nylon



Y (mm)	T (N)	No. Teeth	O.D. (mm)	Pitch Circum. (mm)	Radial Runout (mm)	Axial Runout (mm)	PLD 2a (mm)
2300.00 + 0.000 + 0.000	18949	40	250.33	800.00	0.0005	0.0010	4.318

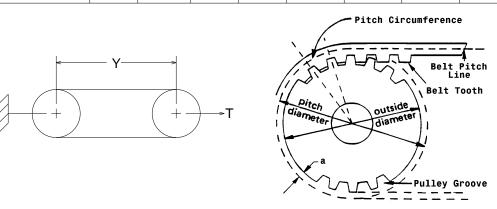

The length shall be measured by placing the belts on two pulleys of equal diameters that have been grooved in accordance with standard specifications and rotated at least three complete turns with the specified tension so that each strand receives half the total tension. The length will be that length obtained by adding the Pitch Circumference of one pulley to twice the center distance (dimension 'Y').

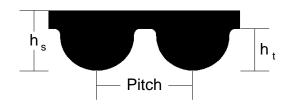

## **Belt Section Dimensions**

Tooth	Pitch	h <sub>s</sub>	h <sub>t</sub>
Type	(mm)	(mm)	(mm)
HTD	20	13.200	8.400

## **Belt Dimensions**

Pitch Length	No.	Width		
(mm)	Teeth	(mm)		
5400.00 + 0.000 - 0.000	270			



## DesignView™

Belt Information Sheet

Created 30 Jun 2017 by Gates

Created for

Gates: PowerGrip GT2 - 20M

**Gates Product Number** 

**Customer Part Number** 

9293-0754

5400-20M-290

Application Version: 1.1.19 Database Version: 1.1.00