




Standard Construction Features

Belt Type: Synchronous

Core Material: Oil & Heat Resistant (chloroprene)

Cord/Tensile: Fiberglass

Jacket: Nylon

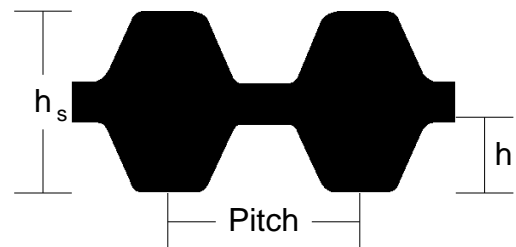

Belt Section Dimensions


Tooth Type	Pitch (in)	h_s (in)	h_t (in)
TRAP	3/8	0.180	0.075

Belt Dimensions

Pitch Length (in)	No. Teeth	Width (in)
27.00 ± 0.024	72	1.000 ± 0.000

Measuring Information

Y (in)	T (lbf)	No. Teeth	O.D. (in)	Pitch Circum. (in)	Radial Runout (in)	Axial Runout (in)	PLD 2a (in)
9.00 ± 0.012 ± 0.012	193	24	2.83	9.00	0.0005	0.0030	0.030

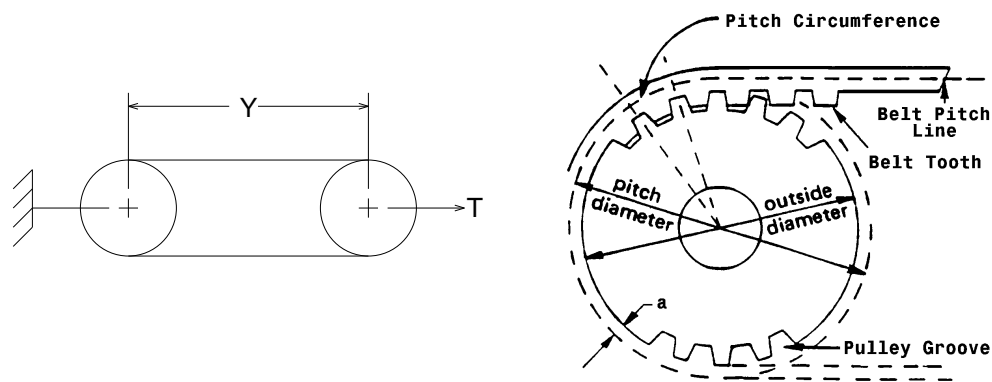

The length shall be measured by placing the belts on two pulleys of equal diameters that have been grooved in accordance with standard specifications and rotated at least three complete turns with the specified tension so that each strand receives half the total tension. The length will be that length obtained by adding the Pitch Circumference of one pulley to twice the center distance (dimension 'Y').



DesignView™ Belt Information Sheet

Created 28 Jun 2017 by Gates

Created for
PowerGrip Twin Power - TP-L

Gates Product Number

9246-2307

Customer Part Number

TP 270 L 100