


ITEM NO.	QTY	DESCRIPTION
1	1	8M-36S-36 IDLER HSG
2	1	3/4-16UNF X 3.50 HX HD GR5
3	2	NSK 6306DDU C3 BRG
4	2	3/4-16UNF HEX JAM NUT
5	1	3/4 STD PLATE WASHER
6	1	1.500DX. 374WIDEX. 125 THICK SLEEVE

THIS DRAWING IS A STANDARD POWER TRANSMISSION COMPONENT. DETAILS SHOWN WHICH DO NOT AFFECT DRIVE FUNCTION MAY BE CHANGED WITHOUT ANY NOTIFICATION. CLOSE FITTING OR CUSTOMER MODIFIED STOCK COMPONENTS CAN BE ORDERED BY CONTACTING GATES INDUSTRIAL SALES DIVISION.

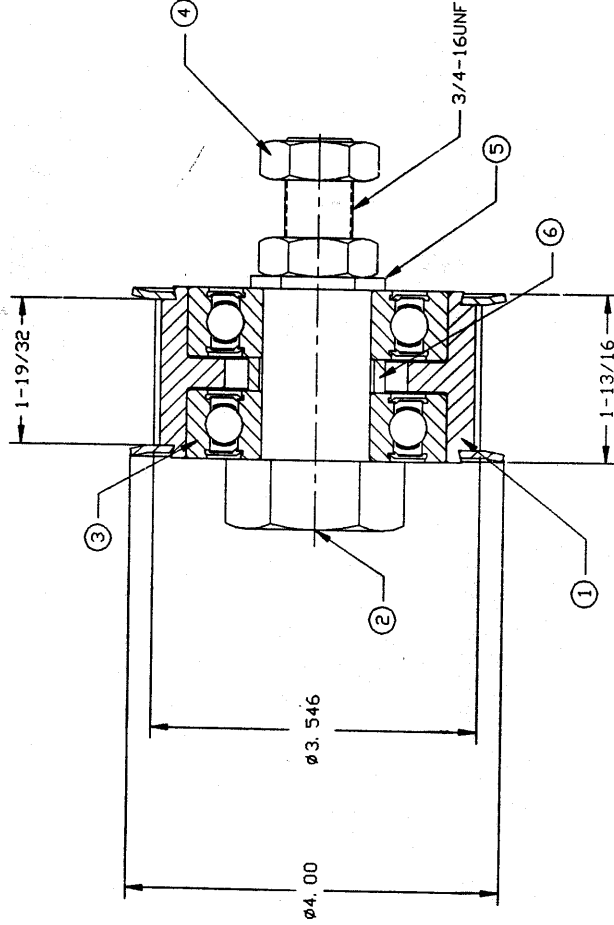

CERTIFIED

TOOTH TYPE: POLY-CHAIN BELT PITCH: 8M PITCH DIA: 3.609 NO. OF TEETH: 36 MATERIAL: DUCTILE IRON FINISH: 250 ✓ COATINGS: ANTI-RUST		THE MATERIALS AND INFORMATION, INCLUDING THE PRINCIPALS OF DESIGN PRESENTED, ARE THE EXCLUSIVE PROPERTY OF THE GATES RUBBER COMPANY AND ARE TO BE CONSIDERED AS CONFIDENTIAL INFORMATION. ACCORDINGLY, THIS INFORMATION IS SUBMITTED TO YOU WITH THE AGREEMENT THAT IT WILL BE KEPT CONFIDENTIAL AND NOT BE REPRODUCED, COPIED, OR LOANED, IN PART OR IN WHOLE, NOR IS THE INFORMATION TO BE RELAYED TO ANY OTHER INDIVIDUAL OR COMPANY. ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO THE ABOVE.		CUSTOMER NAME: CUSTOMER DWG NO.: MACHINING TOLERANCE: UNLESS OTHERWISE SPECIFIED ±1/64 ON ALL FRACTIONAL DIM ±0.00 ON ALL TWO PLACE DIM ±0.005 ON ALL THREE PLACE DIM ±1/2° ON ALL ANGULAR DIM BREAK ALL CORNERS .005-.015	
PART DESCRIPTION: 8M-36S-36 IDLER SPKT GATES PART NUMBER: 77201520		APPROVED BY: _____ DATE: _____ DR. BY: LAF CK. BY: _____ APPD. BY: _____		REF. QUOTE NO.: DRAWING NO.: 77201520	