


ITEM NO.	DESCRIPTION
1	14M-34S-68 IDLER HSG
2	1-14NS-1B X 5.81 HX HD GRS
3	NSK 6310DDU C3 BRG
4	2 1-14NS-1B HEX JAM NUT
5	1 STD PLATE WASHER
6	2.3800X1.44VIDEX 156 THICK SLEEVE

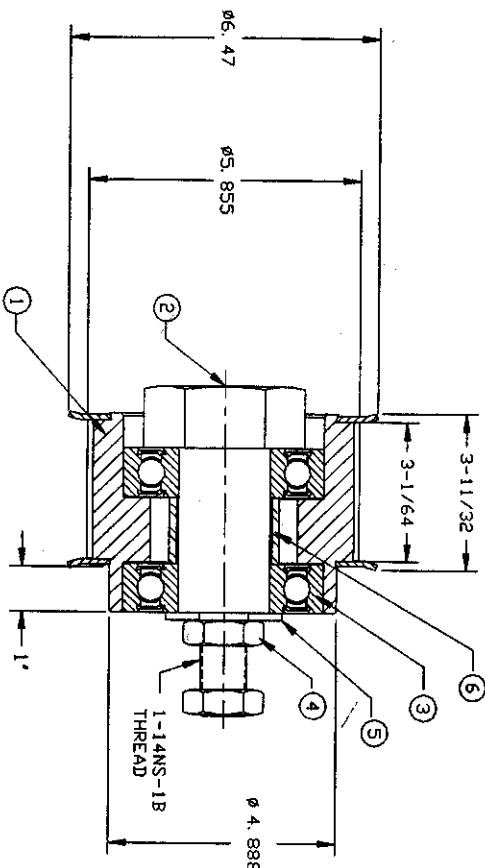

THIS DRAWING IS A STANDARD POWER TRANSMISSION COMPONENT. DETAIL SHOWING DIMENSIONS DO NOT AFFECT DRIVE FUNCTION MAY BE REVISED WITHOUT NOTICE. CLOSE FITTING OR OVERLAP UNDESIGNED STOCK COMPONENTS CAN BE ORDERED BY CONTACTING GATES INDUSTRIAL SALES DIVISION.

CERTIFIED

TOOTH TYPE: POLY-CHAIN
BELT PITCH: 14M

PITCH DIA: 5.965
NO. OF TEETH: 34

MATERIAL: DUCTILE IRON
FINISH: 250 ✓
COATINGS: ANTI-RUST

THE MATERIALS AND INFORMATION, INCLUDING THE PRINCIPALS OF DESIGN PRESENTED, ARE THE EXCLUSIVE PROPERTY OF THE GATES RUBBER COMPANY AND ARE TO BE CONSIDERED AS CONFIDENTIAL INFORMATION. ACCORDINGLY, THIS INFORMATION IS SUBMITTED TO YOU WITH THE AGREEMENT THAT IT IS NOT TO BE REPRODUCED, COPIED, OR LOANED, IN PART OR IN WHOLE, WITHOUT THE WRITTEN PERMISSION OF THE GATES RUBBER COMPANY. ANY VIOLATION OF THIS AGREEMENT WILL BE CONSIDERED AS AN AGREEMENT TO THE ABOVE.

MACHINING TOLERANCE:
UNLESS OTHERWISE SPECIFIED
±1/64 ON ALL FRACTIONAL DIM
±.005 ON ALL TWO PLACE DIM
±1/2 ON ALL THREE PLACE DIM
BREAK ALL CORNERS
.005-.015

CUSTOMER NAME:
CUSTOMER DWG NO.:



THE GATES RUBBER CO.
DENVER, COLORADO

DATE	REV	DATE	APP'D	REVISION

PART DESCRIPTION: 14M-34S-68 IDLER SPKT
GATES PART NUMBER: 77201620

APPROVED BY: _____ REF. QUOTE NO. _____

DATE: _____

DR. BY: LAF DATE: 4-15-94 DRAWING NO. 77201620
CK. BY: [Signature] Appn. BY: [Signature]