
TECHNICAL DRAWINGS ARE APPROXIMATE ACTUAL SIZE

PIN TYPE

The pin type grease fitting is one of the earliest grease fitting designs ever manufactured. These fittings were a common sight on vehicles in the 1910's and 1920's and are still used today in some applications. Servicing is performed by hooking a special coupler, found on page 121, around both ends of the pin to create a leak-proof seal.

HM336


Straight Pin Type
1/8"-27 PTF Spl. Short
Standard Shank



M336 — BRASS WITH MONEL® PIN

HA336


Straight Pin Type
1/8"-27 NPTF
Standard Shank



A336 — NICKEL PLATED BRASS

HA359


Straight Pin Type
1/4"-18 NPTF
Standard Shank



A359 — NICKEL PLATED BRASS

HA684


45° Angle Pin Type
1/8"-27 NPTF
Standard Shank

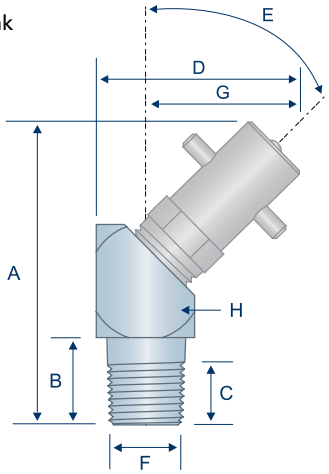

A684 — NICKEL PLATED BRASS
ZINC PLATED STEEL ELBOW

HA358

90° Angle Pin Type
1/8"-27 NPTF
Standard Shank

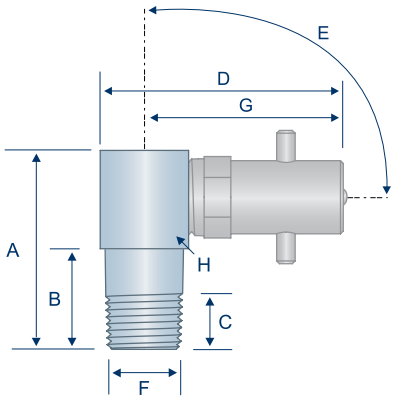

A358 — NICKEL PLATED BRASS
ZINC PLATED STEEL ELBOW

Item #	Thread	Angle (E)	Overall Length (A)	Shank Length (B)	Min. Thread Length (C)	Overall Width (D)	Thread Diameter (F)	Swing Clearance (G)	Hex (H)
HM336	1/8"-27	Straight	.97"	.27"	.19"	—	.39"	—	7/16"
HA336 ✱	1/8"-27	Straight	1.06"	.29"	.20"	—	.39"	—	7/16"
HA359	1/4"-18	Straight	1.18"	.41"	.25"	—	.52"	—	14.0 mm
HA684	1/8"-27	45°	1.61"	.46"	.30"	1.10"	.39"	.85"	1/2"
HA358	1/8"-27	90°	1.06"	.60"	.25"	1.42"	.39"	1.17"	1/2"
HA360 ⬡	1/4"-18	45°	1.75"	.60"	.41"	1.10"	.52"	.85"	9/16"
HA361Z3 ⬡	1/4"-18	90°	1.31"	.60"	.41"	1.42"	.52"	1.17"	9/16"

All manufacturer names and numbers are for cross reference identification purposes only. In no way are we implying that our parts were made by the manufacturers listed.
Prices, materials, dimensions, tolerances, designs and grades subject to change without notice. © G.L. Huyett 2019
Monel® is a registered trademark of the Inco Alloys, International, Inc.

⬡ ITEMS ARE NOT PICTURED.