

1/8"-27 PTF

EXCEEDS 12 HR SALT SPRAY.
8,000 PSI MAX PRESSURE.

SAE J534

Angled fittings are often found on industrial machinery where maintenance in confined areas is a necessity. G.L. Huyett offers a variety of angles to fit your individual need. 1/8"-27 PTF fittings have threads that taper toward the end of the shank. When installed, the threads compress into the mated assembly, thus forming a tight seal.

HI611


30° Angle
1/8"-27 PTF Spl. Extra Short
Standard Shank



1611-B AVAILABLE IN STAINLESS
 AVAILABLE IN MONEL®

HI638

30° Angle
1/8"-27 PTF Spl. Short
Extra Long Shank

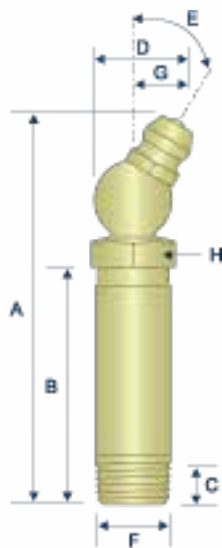

1638-B
 JD1183

HI689


45° Angle
1/8"-27 PTF Spl. Short
Standard Shank



1688-B AVAILABLE IN STAINLESS
 5200
 JD1163

HI688

45° Angle
1/8"-27 PTF Spl. Short
Standard Shank



T245870

ITEM #	THREAD	ANGLE (E)	OVERALL LENGTH (A)	SHANK LENGTH (B)	MIN. THREAD LENGTH (C)	OVERALL WIDTH (D)	THREAD DIAMETER (F)	SWING CLEARANCE (G)	HEX (H)
HI611	1/8"-27	30°	.90"	.30"	.22"	.56"	.39"	.34"	7/16"
HI638	1/8"-27	30°	2.09"	1.25"	.22"	.56"	.39"	.34"	7/16"
HI689	1/8"-27	45°	.88"	.28"	.22"	.62"	.39"	.46"	7/16"
HI688	1/8"-27	45°	1.01"	.28"	.22"	.62"	.39"	.46"	7/16"