
PRESSURE & FLOW CONTROL — SAE J534 — STAINLESS

TECHNICAL DRAWINGS ARE APPROXIMATE ACTUAL SIZE

Safety vents are equipped with a special groove across the threads which provides a cost effective way to vent excess lubricant pressure and prevent bearing seal damage.

H1930S

Straight Safety Vent - Stainless
1/8"-27 PTF Spl. Extra Short
Standard Shank



SPECIAL PARTS

DO YOU NEED A CUSTOM GREASE FITTING FOR YOUR OPERATION?


ALTERNATE MATERIALS AND DESIGNS AVAILABLE UPON REQUEST.

WE CAN MAKE IT, CALL OUR SALES TEAM TODAY!

Item #	Thread	Angle (E)	Overall Length (A)	Shank Length (B)	Min. Thread Length (C)	Thread Diameter (F)	Hex (H)
H1930S	1/8"-27	Straight	.66"	.28"	.18"	.39"	7/16"

DESIGN FEATURE

FOR MORE INFORMATION, PLEASE SEE PG. 58

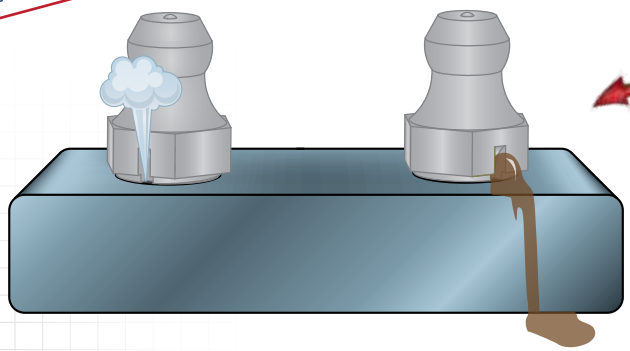

THE GROOVE ALONG THE THREADS OF SAFETY VENTS IS A COST EFFECTIVE WAY TO PROTECT BEARING SEALS FROM OVER PRESSURIZATION

Common Parts — Parts with this designation are in wide distribution.

Alemite® — Alemite® is a registered trademark of Alemite, LLC, Johnson City, TN, USA.

Lincoln Industrial® — Lincoln Industrial® is a registered trademark of Lincoln Industrial (USA) Corp.

John Deere® — John Deere® is a registered trademark of Deere and Company, Moline, Illinois.

All manufacturer names and numbers are for cross reference identification purposes only. In no way are we implying that our parts were made by the manufacturers listed.
Prices, materials, dimensions, tolerances, designs and grades subject to change without notice. © G.L. Huyett 2019