

1/4"-28 SAE-LT


EXCEEDS 72 HR SALT SPRAY.
8,000 PSI MAX PRESSURE

SAE J534

A common sight on automobile chassis, 90° angle fittings are often used when overhead access is impractical. As with all angled fittings, care should be taken to ensure proper orientation of the greasing nipple to the access point.

H1911Z3

90° Angle
1/4"-28 Taper Thread
Standard Shank



1911-B1

5410

JD7806


AVAILABLE IN STAINLESS

AVAILABLE IN BRASS

AVAILABLE IN MONEL®

H1911NZ3


90° Angle
1/4"-28 Taper Thread
Standard Shank



NO BALL CHECK


H1970Z3

90° Angle
1/4"-28 Taper Thread
Long Shank



H700259


90° Angle
1/4"-28 Taper Thread
Short Shank



700259

Item #	Thread	Angle (E)	Overall Length (A)	Shank Length (B)	Min. Thread Length (C)	Overall Width (D)	Thread Diameter (F)	Swing Clearance (G)	Hex (H)
H1911Z3	1/4"-28	90°	.75"	.20"	.10"	.66"	.25"	.47"	3/8"
H1911NZ3	1/4"-28	90°	.75"	.20"	.10"	.68"	.25"	.49"	3/8"
H1970Z3	1/4"-28	90°	.80"	.30"	.22"	.69"	.25"	.50"	3/8"
H700259	1/4"-28	90°	.75"	.16"	.10"	.66"	.25"	.47"	3/8"

DESIGN FEATURE

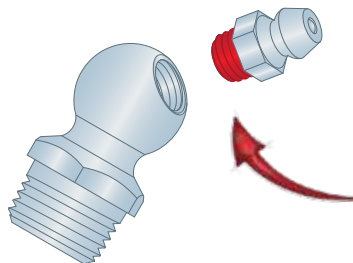

THREAD SEALANT IS AUTOMATICALLY
ADDED ON MOST DESIGNS,
YIELDING A LEAK-FREE PERFORMANCE



Common Parts
Parts with this designation
are in wide distribution.



Alemite®
Alemite® is a registered trademark of
Alemite, LLC, Johnson City, TN, USA.



Lincoln Industrial®
Lincoln Industrial® is a registered trademark
of Lincoln Industrial (USA) Corp.



John Deere®
John Deere® is a registered trademark of
Deere and Company, Moline, Illinois.

All manufacturer names and numbers are for cross reference identification purposes only. In no way are we implying that our parts were made by the manufacturers listed. Prices, materials, dimensions, tolerances, designs and grades subject to change without notice. © G.L. Huyett 2019