HERITAGE™
785.392.3017 FAX 785.392.2845
BOX 232 • MINNEAPOLIS, KS • 67467
www.huyett.com
G.L.HUYETT

1/8"-27 NPTF - FEMALE

EXCEEDS 72 HR SALT SPRAY.
8,000 PSI MAX PRESSURE.

SAE J534

TECHNICAL DRAWINGS ARE APPROXIMATE ACTUAL SIZE

Female threads allow the fitting to be threaded onto a pipe or used as a nut for component assembly. The H1620 possesses a square primary body, as opposed to a hexagon, but is a one-piece design. The H1618 and H1622 are two-piece designs.

H1618

Straight
1/8"-27 NPTF
Female Threads



1618-B
5505

TWO-PIECE DESIGN

H1620

45° Angle
1/8"-27 NPTF
Female Threads



1620-B

H1622

90° Angle
1/8"-27 NPTF
Female Threads

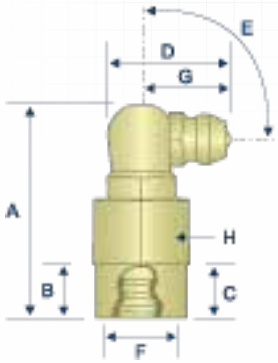

TWO-PIECE DESIGN

ITEM #	THREAD	ANGLE (E)	OVERALL LENGTH (A)	SHANK LENGTH (B)	MIN. THREAD LENGTH (C)	OVERALL WIDTH (D)	THREAD DIAMETER (F)	SWING CLEARANCE (G)	HEX (H)
H1618 *	1/8"-27	STRAIGHT	1.00"	.31"	.28"	□	.34"	□	1/2"
H1620	1/8"-27	45□	1.13"	.39"	.28"	.64"	.34"	.33"	7/16" SQ.
H1622	1/8"-27	90□	1.25"	.41"	.28"	.66"	.34"	.41"	1/2"

CONSIDER THIS

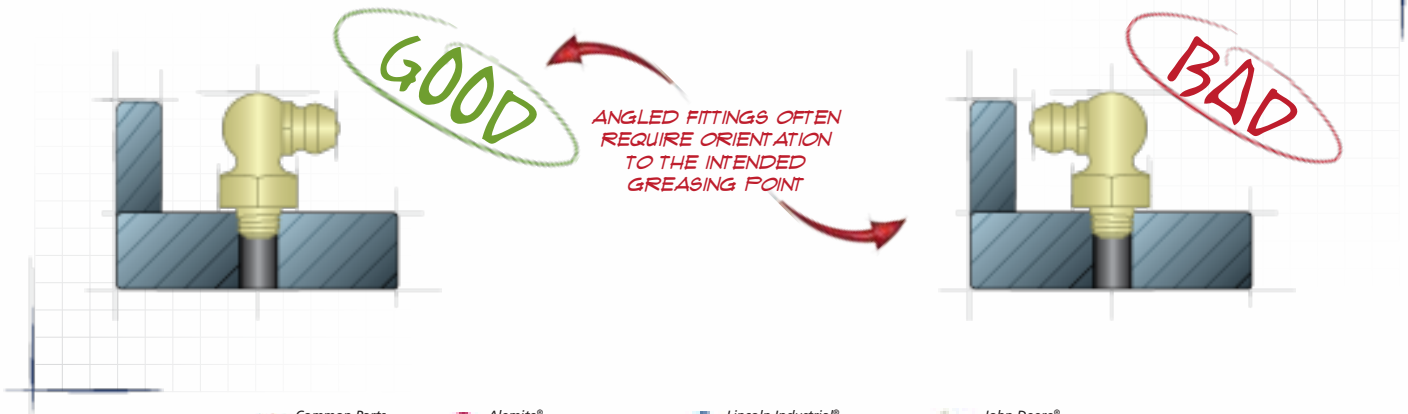

* Common Parts — Parts with this designation are in wide distribution.

Alemite® — Alemite® is a registered trademark of Alemite, LLC, Johnson City, TN, USA.

Lincoln Industrial® — Lincoln Industrial® is a registered trademark of Lincoln Industrial (USA) Corp.

John Deere® — John Deere® is a registered trademark of Deere and Company, Moline, Illinois.

All manufacturer names and numbers are for cross reference identification purposes only. In no way are we implying that our parts were made by the manufacturers listed.
Prices, materials, dimensions, tolerances, designs and grades subject to change without notice. © G.L. Huyett 2011

REVISED 06-11