QUICK CONNECT

Quick connect adapters are an effective way to bring versatility to grease guns. When multiple types of greasing tools are required for scheduled maintenance, quick connect allows for fast and easy changing of the tool to ensure proper lubrication of grease fittings. The couplers below are for standard grease fittings, and the H84480 is for servicing button head fittings.

H84095
Quick Connect Coupler
Hydraulic Tip
90° Angle

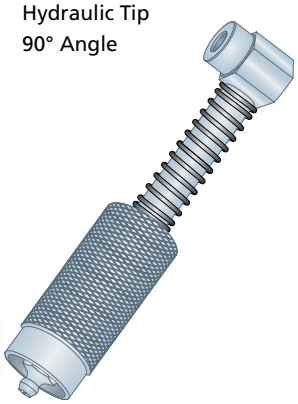

3 JAW CONSTRUCTION
FOR HAND EQUIPMENT

H84625
Quick Connect Coupler
Push Type Tip
90° Angle

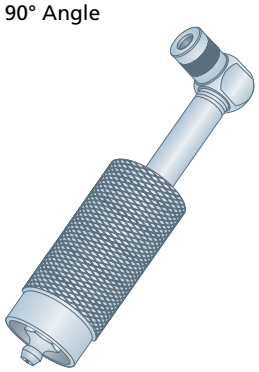

FOR HAND EQUIPMENT

H84090
Quick Connect Coupler
Hydraulic Tip
90° Angle



FOR HAND EQUIPMENT

H84480
Quick Connect Coupler
Button Head Tip
Push-on



FOR HAND EQUIPMENT

Item #	Description	Equipment Type	Angle	Tip
H84095	Quick Connect Coupler - 90° Hydraulic	Hand	90°	3 Jaw Hydraulic
H84625	Quick Connect Coupler - 90° Push Type	Hand	90°	Push Type
H84090	Quick Connect Coupler - 90° Angle	Hand	90°	90° Hydraulic
H84480	Quick Connect Coupler - Push-on Button Head	Hand	90° Push-on	Button Head

DESIGN FEATURE



RETRACT THE SLEEVE OF THE QUICK CONNECT COUPLER



ATTACH THE QUICK CONNECT COUPLER TO THE HYDRAULIC COUPLER OF YOUR GREASE GUN



RELEASE THE QUICK CONNECT COUPLER SLEEVE TO SECURE CONNECTION

All manufacturer names and numbers are for cross reference identification purposes only. In no way are we implying that our parts were made by the manufacturers listed.
Prices, materials, dimensions, tolerances, designs and grades subject to change without notice. © G.L. Huyett 2019