HUYETT.COM • 785-392-3017
BOX 232 • MINNEAPOLIS, KS • 67467
SALES@HUYETT.COM • FAX 785-392-2845


HITCH – SWIVEL LOCK


DESCRIPTION

Hitch pins are used to attach trailers and various turf and agricultural implements. Manufactured from heat treated steel with swivel handle and swivel tab lock.

HOW TO IDENTIFY

1. Verify pin with swivel handle and swivel tab lock at opposite end.
2. Measure diameter (A).
3. Measure effective length (C).
4. Find the part in the chart below.

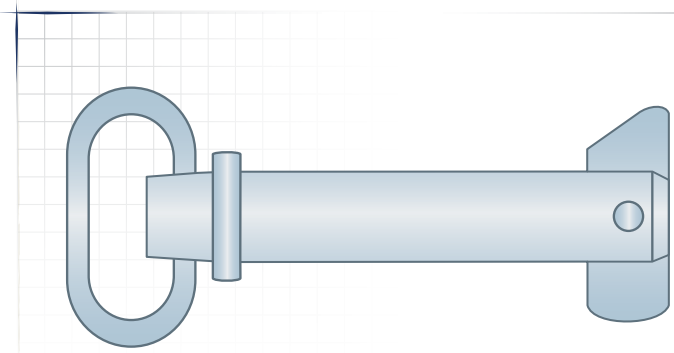

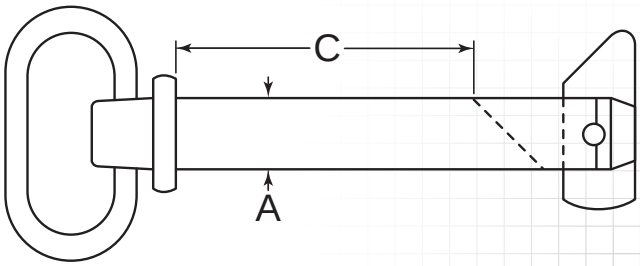

PREFIX MATERIAL/FINISH

HPSL = MEDIUM CARBON STEEL, ZINC CLEAR

ADDITIONAL SIZES AND FINISHES MAY BE AVAILABLE UPON REQUEST

ITEM NUMBER	(A) OUTSIDE DIAMETER	(C) EFFECTIVE LENGTH +.060/-.000"	HEAD DIAMETER
	+.000/-.004"		+.020/-.020"
HPSL-0375-2750	.375" (3/8)	2.750" (2-3/4)	1.000" (1)
HPSL-0375-4000	.375" (3/8)	4.000" (4)	1.000" (1)
	+.000/-.005"		
HPSL-0500-3500	.500" (1/2)	3.500" (3-1/2)	1.250" (1-1/4)
HPSL-0500-5500	.500" (1/2)	5.500" (5-1/2)	1.250" (1-1/4)
			+.010/-.010"
HPSL-0625-3500	.625" (5/8)	3.500" (3-1/2)	1.500" (1-1/2)
HPSL-0625-5500	.625" (5/8)	5.500" (5-1/2)	1.500" (1-1/2)
HPSL-0750-3500	.750" (3/4)	3.500" (3-1/2)	1.500" (1-1/2)
HPSL-0750-6000	.750" (3/4)	6.000" (6)	1.500" (1-1/2)
HPSL-0812-6250	.812" (4/5)	6.250" (6-1/4)	1.500" (1-1/2)
HPSL-0875-3500	.875" (7/8)	3.500" (3-1/2)	1.500" (1-1/2)
HPSL-0875-6000	.875" (7/8)	6.000" (6)	1.500" (1-1/2)
			+.060/-.060"
HPSL-1000-3500	1.000" (1)	3.500" (3-1/2)	1.875" (1-7/8)
HPSL-1000-6000	1.000" (1)	6.000" (6)	1.875" (1-7/8)

MANUFACTURING CAPABILITIES:



FOR DETAILED SPECIFICATIONS AND TOLERANCES, VISIT HUYETT.COM.

Prices, materials, dimensions, tolerances, designs, and grades subject to change without notice. © 2015 G.L. Huyett