BUTTON HEAD

SAE J534

STAINLESS

In extremely rugged environments, stainless steel button head fittings provide an additional level of corrosion protection and strength. These fittings are a common sight on oil drilling equipment. The H1820S heavy duty button head is ideal for large volumes of lubricant.

TECHNICAL DRAWINGS ARE APPROXIMATE ACTUAL SIZE

H1184S

Button Head - Stainless
1/8"-27 PTF Spl. Short
Ball Check



AVAILABLE IN MONEL®

H1186S

Button Head - Stainless
1/4"-18 NPTF
Ball Check



H1188S

Button Head - Stainless
3/8"-18 NPTF
Ball Check



H1820S

Button Head - Stainless
1/2"-14 NPTF
Ball Check



Item #	Thread	Overall Length (A)	Shank Length (B)	Min. Thread Length (C)	Thread Diameter (F)	Hex (H)	Valve System
H1184S	1/8"-27	.75"	.34"	.22"	.39"	5/8"	Ball Check
H1186S	1/4"-18	.83"	.42"	.27"	.52"	5/8"	Ball Check
H1188S	3/8"-18	.95"	.48"	.41"	.64"	3/4"	Ball Check
H1820S	1/2"-14	1.06"	.50"	.44"	.82"	7/8"	Ball Check

CONSIDER THIS...

CONVENTIONAL STYLE

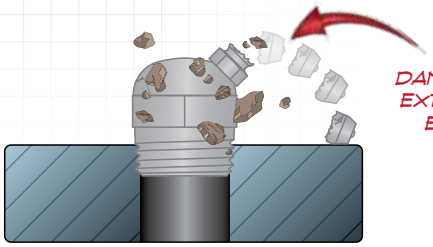

DEBRIS CAN DAMAGE NIPPLES IN EXTREMELY HARSH ENVIRONMENTS

BUTTON HEAD STYLE

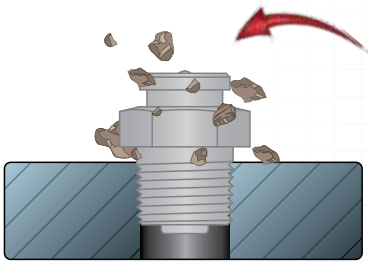

USE A BUTTON HEAD FITTING IN EXTREME ENVIRONMENTS WHERE THERE MAY BE A RISK OF DAMAGE, SEE PAGE 38 FOR DETAILS

Common Parts
Parts with this designation are in wide distribution.

Alemite®
Alemite® is a registered trademark of Alemite, LLC, Johnson City, TN, USA.

Lincoln Industrial®
Lincoln Industrial® is a registered trademark of Lincoln Industrial (USA) Corp.

John Deere®
John Deere® is a registered trademark of Deere and Company, Moline, Illinois.

All manufacturer names and numbers are for cross reference identification purposes only. In no way are we implying that our parts were made by the manufacturers listed.
Prices, materials, dimensions, tolerances, designs and grades subject to change without notice. © G.L. Huyett 2019

Monel® is a registered trademark of the Inco Alloys, International, Inc.