1/4"-28 SAE-LT

SAE J534

MONEL®

Our most corrosion resistant grease fittings, Monel® fittings, are designed to withstand the harshest environments and are often found in industrial, marine and chemical processing applications. The surface finish is similar to stainless steel, so to differentiate, a single notch is placed on the hex for identification.

H1641M

Straight - Monel®
1/4"-28 Taper Thread
Standard Shank



1966-B

AVAILABLE IN STAINLESS
AVAILABLE IN BRASS

H1911M

90° Angle - Monel®
1/4"-28 Taper Thread
Standard Shank



1969-B

AVAILABLE IN STAINLESS
AVAILABLE IN BRASS

Item #	Thread	Angle (E)	Overall Length (A)	Shank Length (B)	Min. Thread Length (C)	Overall Width (D)	Thread Diameter (F)	Swing Clearance (G)	Hex (H)
H1641M	1/4"-28	Straight	.53"	.19"	.11"	—	.25"	—	5/16"
H1911M	1/4"-28	90°	.75"	.20"	.11"	.68"	.25"	.49"	3/8"

BUTTON HEAD

H1184M

Straight Button Head - Monel®
1/8"-27 PTF Spl. Short
Plunger Check



M1184

AVAILABLE IN STAINLESS

FLUSH TYPE

H1877M

Straight Flush Drive Type - Monel®
≈ 1/8" Drill Size

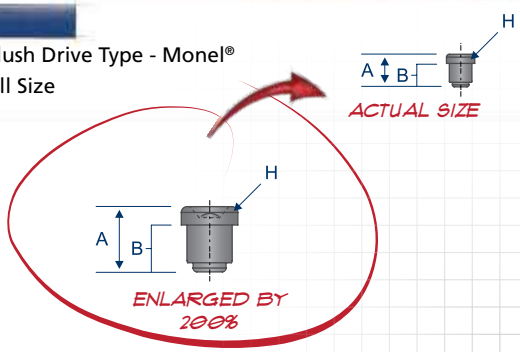

Item #	Thread	Drill Diameter	Overall Length (A)	Shank Length (B)	Min. Thread Length (C)	Thread Diameter (F)	Hex / Shoulder Diameter (H)
H1184M	1/8"-27	—	.75"	.34"	.22"	.39"	5/8"
H1877M	—	≈ 1/8" Drill	.18"	.13"	—	—	5/32"

TECHNICAL DRAWINGS ARE APPROXIMATE ACTUAL SIZE

Common Parts
Parts with this designation are in wide distribution.

Alemite®
Alemite® is a registered trademark of Alemite, LLC, Johnson City, TN, USA.

Lincoln Industrial®
Lincoln Industrial® is a registered trademark of Lincoln Industrial (USA) Corp.

John Deere®
John Deere® is a registered trademark of Deere and Company, Moline, Illinois.

All manufacturer names and numbers are for cross reference identification purposes only. In no way are we implying that our parts were made by the manufacturers listed.
Prices, materials, dimensions, tolerances, designs and grades subject to change without notice. © G.L. Huyett 2019

Monel® is a registered trademark of the Inco Alloys, International, Inc.

REVISED 03-19