

SPZ Metric V-Belt Sheaves - Taper Bushed



Models Available



Fig 1

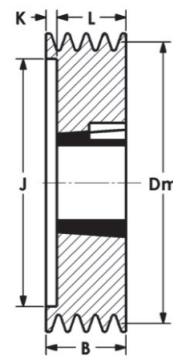


Fig 3




Fig 9

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPZ50 x 1-1008	50	1	1008	25	9	16	26	15	37	—	60	0.3
SPZ50 x 2-1008		2	1008	25	9	28	26	27	49	—	60	0.4
SPZ56 x 1-1008	56	1	1008	25	9	16	30	15	37	—	60	0.4
SPZ56 x 2-1108		2	1108	28	9	28	30	27	49	—	60	0.5
SPZ60 x 1-1008	60	1	1008	25	1	16	—	—	22	6	55	0.5
SPZ60 x 2-1108		2	1108	28	9	28	34	27	49	—	64	0.6
SPZ63 x 1-1108	63	1	1108	28	1	16	—	—	22	6	60	0.2
SPZ63 x 2-1108		2	1108	28	3	28	37	6	22	—	—	0.3
SPZ63 x 3-1108		3	1108	28	3	40	37	18	22	—	—	0.4
SPZ67 x 1-1108	67	1	1108	28	1	16	—	—	22	6	60	0.3
SPZ67 x 2-1108		2	1108	28	3	28	38	6	22	—	—	0.4
SPZ67 x 3-1108		3	1108	28	3	40	38	18	22	—	—	0.5
SPZ71 x 1-1108	71	1	1108	28	1	16	—	—	22	6	60	0.3
SPZ71 x 2-1108		2	1108	28	3	28	42	6	22	—	—	0.4
SPZ71 x 3-1108		3	1108	28	3	40	42	18	22	—	—	0.6
SPZ75 x 1-1108	75	1	1108	28	1	16	—	—	22	6	60	0.4
SPZ75 x 2-1210		2	1210	32	3	28	46	3	25	—	—	0.4
SPZ75 x 3-1210		3	1210	32	3	40	46	15	25	—	—	0.5
SPZ80 x 1-1210	80	1	1210	32	1	16	—	—	26.5	10.5	75	0.5
SPZ80 x 2-1210		2	1210	32	3	28	51	3	25	—	—	0.6
SPZ80 x 3-1210		3	1210	32	3	40	51	15	25	—	—	0.7
SPZ80 x 4-1210		4	1210	32	3	52	51	27	25	—	—	0.8
SPZ85 x 1-1210	85	1	1210	32	1	16	—	—	25	9	83	0.6
SPZ85 x 2-1610		2	1610	42	3	28	56	3	25	—	—	0.5
SPZ85 x 3-1610		3	1610	42	3	40	56	15	25	—	—	0.6
SPZ85 x 4-1610		4	1610	42	3	52	56	27	25	—	—	0.9
SPZ85 x 5-1610		5	1610	42	3	64	56	39	25	—	—	1.0
SPZ90 x 1-1210	90	1	1210	32	1	16	—	—	26.5	10.5	83	0.7
SPZ90 x 2-1610		2	1610	42	3	28	61	3	25	—	—	0.7
SPZ90 x 3-1610		3	1610	42	3	40	61	15	25	—	—	0.8
SPZ90 x 4-1610		4	1610	42	3	52	61	27	25	—	—	1.0
SPZ90 x 5-1610		5	1610	42	3	64	61	39	25	—	—	1.2
SPZ95 x 1-1210	95	1	1210	32	1	16	—	—	26.5	10.5	83	0.7
SPZ95 x 2-1610		2	1610	42	3	28	66	3	25	—	—	0.8
SPZ95 x 3-1610		3	1610	42	3	40	66	15	25	—	—	0.9
SPZ95 x 4-1610		4	1610	42	3	52	66	27	25	—	—	1.1
SPZ95 x 5-1610		5	1610	42	3	64	66	39	25	—	—	1.3