

SPB Metric V-Belt Sheaves - Taper Bushed



Models Available

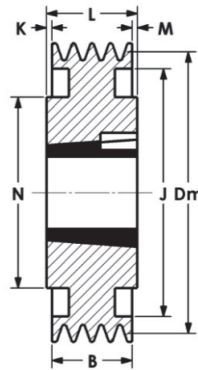


Fig 5

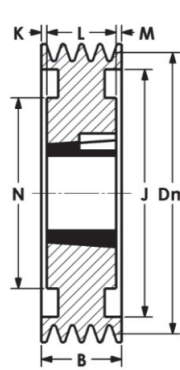


Fig 6

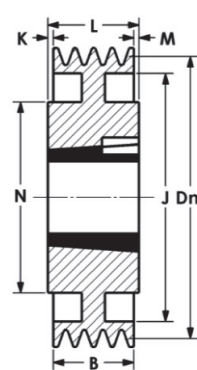


Fig 7

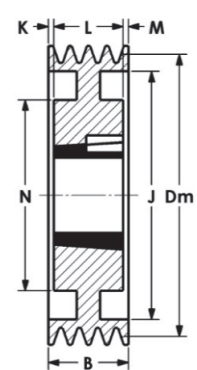


Fig 8

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPB280 x 1-2012	280	1	2012	50	7	25	242	—	32	7	95	6.2
SPB280 x 2-2517*		2	2517	65	7	44	242	0.5	45	0.5	124	6.8
SPB280 x 3-3020		3	3020	75	8	63	242	6	51	6	159	8.6
SPB280 x 4-3020		4	3020	75	6	82	242	15.5	51	15.5	159	10.1
SPB280 x 5-3535*		5	3535	90	6	101	239	6	89	6	178	17.8
SPB280 x 6-3535*		6	3535	90	6	120	239	15.5	89	15.5	178	19.6
SPB280 x 8-3535*		8	3535	90	6	158	239	34.5	89	34.5	—	26.7
SPB280 x 10-3535*		10	3535	90	6	196	239	46	89	61	—	30.5
SPB300 x 1-2012	300	1	2012	50	7	25	262	—	32	7	95	6.8
SPB300 x 2-2517*		2	2517	65	7	44	262	0.5	45	0.5	124	7.3
SPB300 x 3-3020		3	3020	75	8	63	262	6	51	6	159	9.2
SPB300 x 4-3020		4	3020	75	6	82	262	15.5	51	15.5	159	14.3
SPB300 x 5-3535*		5	3535	90	6	101	259	6	89	6	178	18.2
SPB300 x 6-3535*		6	3535	90	6	120	259	15.5	89	15.5	178	21.9
SPB300 x 8-3535*		8	3535	90	6	158	259	34.5	89	34.5	180	26.2
SPB315 x 1-2012	315	1	2012	50	7	25	277	—	32	7	95	7.2
SPB315 x 2-2517*		2	2517	65	7	44	269	0.5	45	0.5	124	7.8
SPB315 x 3-3020		3	3020	75	8	63	269	6	51	6	159	9.6
SPB315 x 4-3535*		4	3535	90	5	82	269	3.5	89	3.5	178	17.1
SPB315 x 5-3535*		5	3535	90	6	101	269	6	89	6	178	18.8
SPB315 x 6-3535*		6	3535	90	6	120	269	15.5	89	15.5	178	23.0
SPB315 x 8-3535*		8	3535	90	6	158	274	34.5	89	34.5	180	26.0
SPB315 x 10-3535*		10	3535	90	6	196	274	53.5	89	53.5	180	31.5
SPB335 x 2-2517*	335	2	2517	65	7	44	297	—	45	1	120	7.8
SPB335 x 3-3020		3	3020	75	8	63	297	6	51	6	145	10.5
SPB335 x 4-3535*		4	3535	90	7	82	297	3.5	89	3.5	178	18.3
SPB335 x 5-3535*		5	3535	90	8	101	297	6	89	6	178	19.5
SPB335 x 6-3535*		6	3535	90	8	120	297	15.5	89	15.5	179	22.0
SPB335 x 8-3535*		8	3535	90	8	158	294	34.5	89	34.5	180	28.2
SPB335 x 10-4040		10	4040	100	8	196	294	47	102	47	216	36.0
SPB355 x 2-3020	355	2	3020	75	7	44	309	3.5	51	3.5	159	8.7
SPB355 x 3-3020		3	3020	75	8	63	309	6	51	6	159	10.8
SPB355 x 4-3535*		4	3535	90	7	82	309	3.5	89	3.5	178	18.6
SPB355 x 5-3535*		5	3535	90	8	101	309	6	89	6	178	20.8
SPB355 x 6-3535*		6	3535	90	6	120	309	15.5	89	15.5	179	22.8
SPB355 x 8-3535*		8	3535	90	8	158	317	34.5	89	34.5	180	27.0
SPB355 x 10-4040		10	4040	100	8	196	317	47	102	47	216	38.0

Note: * Requires bushing with BSW threads.