

SPC Metric V-Belt Sheaves - Taper Bushed



Models Available

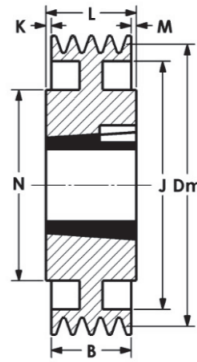


Fig 7

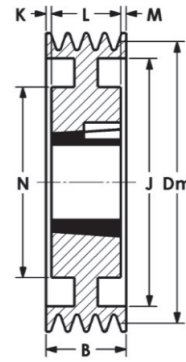


Fig 8

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPC630 x 3-4040	630	3	4040	100	7	85	580	8.5	102	8.5	216	48.5
SPC630 x 4-4545		4	4545	110	7	110.5	580	2.2	115	2.2	242	61.0
SPC630 x 5-5050		5	5050	125	8	136	580	4.5	127	4.5	267	77.0
SPC630 x 6-5050		6	5050	125	8	161.5	580	17.3	127	17.3	267	86.0
SPC630 x 8-5050		8	5050	125	8	212.5	580	42.8	127	42.8	265	105.5
SPC630 x 10-5050		10	5050	125	8	264	580	68.5	127	68.5	267	170.0
SPC710 x 3-4040	710	3	4040	100	7	85	667	8.5	102	8.5	216	57.0
SPC710 x 4-4545		4	4545	110	7	110.5	667	2.2	115	2.2	242	70.0
SPC710 x 5-5050		5	5050	125	8	136	667	4.5	127	4.5	267	80.0
SPC710 x 6-5050		6	5050	125	8	161.5	667	17.3	127	17.3	267	10.0
SPC710 x 8-5050		8	5050	125	8	212.5	667	42.8	127	42.8	265	13.0
SPC710 x 10-5050		10	5050	125	8	264	667	68.5	127	68.5	267	180.0
SPC800 x 3-4545	800	3	4545	110	7	85	737	15	115	15	242	65.0
SPC800 x 4-5050		4	5050	125	7	110.5	737	8.2	127	8.2	267	76.0
SPC800 x 5-5050		5	5050	125	8	136	737	4.5	127	4.5	267	97.0
SPC800 x 6-5050		6	5050	125	8	161.5	737	17.3	127	17.3	267	127.0
SPC800 x 8-5050		8	5050	125	8	212.5	737	42.8	127	42.8	267	145.0
SPC800 x 10-5050		10	5050	125	8	264	737	68.5	127	68.5	267	192.0
SPC900 x 3-4545	900	3	4545	110	7	85	847	15	115	15	242	85.0
SPC900 x 4-5050		4	5050	125	7	110.5	847	8.2	127	8.2	267	100.0
SPC900 x 5-5050		5	5050	125	8	136	847	4.5	127	4.5	267	120.0
SPC900 x 6-5050		6	5050	125	8	161.5	847	17.3	127	17.3	267	140.0
SPC900 x 8-5050		8	5050	125	8	212.5	847	42.8	127	42.8	267	160.0
SPC1000 x 3-5050	1000	3	5050	125	7	85	937	21	127	21	267	115.0
SPC1000 x 4-5050		4	5050	125	7	110.5	937	8.2	127	8.2	267	125.0
SPC1000 x 5-5050		5	5050	125	8	136	937	4.5	127	4.5	267	140.0
SPC1000 x 6-5050		6	5050	125	8	161.5	937	17.3	127	17.3	267	160.0
SPC1000 x 8-5050		8	5050	125	8	212.5	937	42.8	127	42.8	267	180.0
SPC1250 x 3-5050	1250	3	5050	125	7	85	1187	21	127	21	267	170.0
SPC1250 x 4-5050		4	5050	125	7	110.5	1187	8.2	127	8.2	267	210.0
SPC1250 x 5-5050		5	5050	125	8	136	1187	4.5	127	4.5	267	220.0
SPC1250 x 6-5050		6	5050	125	8	161.5	1187	17.3	127	17.3	267	236.0
SPC1250 x 8-5050		8	5050	125	8	212.5	1187	42.8	127	42.8	267	253.0