



## GG Series Gauge Guards

1/4" x 1/4" PVC, CPVC AND PP AND  
1/4" x 1/2" PVC, CPVC AND PVDF

### KEY FEATURES

- PVC, CPVC, PP and PVDF
- Threaded NPT Connections
- FPM Membrane
- All Thermoplastic, No Rust or Corrosion
- No Metal Fasteners
- Rugged, Low Profile, Compact Design
- Work in any Position
- Large Volume Gauge Guard Available
- Dual Faced PSI and kg/cm<sup>2</sup>


### OPTIONS

- 0 to 30 PSI Gauge
- 0 to 60 PSI Gauge
- 0 to 160 PSI Gauge
- 0 to 160 PSI SS Liquid Filled Gauge and Liquid Damped

## TECHNICAL INFORMATION

### PARTS LIST

1. Gauge/Instrument
2. Body
3. Oil-Filled Upper Chamber with Installed Gauge
4. FPM Membrane
5. Union Nut
6. End Connector

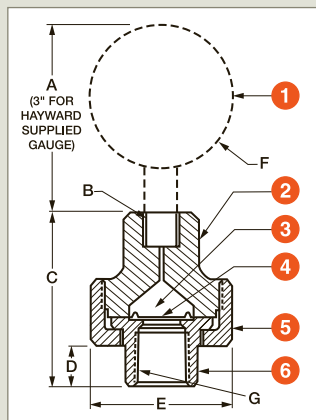

### SELECTION CHART

| SIZE                        | MATERIAL             | END CONNECTION | SEALS | PRESSURE RATING             |
|-----------------------------|----------------------|----------------|-------|-----------------------------|
| 1/4" x 1/4"<br>(DN8 – DN8)  | PVC, CPVC<br>or PP   | Threaded       | FPM   | 150 PSI @ 70°F<br>Non-Shock |
| 1/4" x 1/2"<br>(DN8 – DN15) | PVC, CPVC<br>or PVDF |                |       |                             |

### DIMENSIONS

| SIZE<br>in/DN    | MATERIAL         | A      | B<br>in/mm | C<br>in/mm | D<br>in/mm | E<br>in/mm | F<br>in/mm | G        |
|------------------|------------------|--------|------------|------------|------------|------------|------------|----------|
| 1/4 x 1/4/8 x 8  | PVC, CPVC and PP | 3.0/76 | 1/4" NPT   | 2.69/68    | .61/15     | 2.25/57    | 2.3/58     | 1/4" NPT |
| 1/4 x 1/2/8 x 15 | PVC and CPVC     | 3.0/76 | 1/4" NPT   | 2.69/68    | .61/15     | 2.25/57    | 2.3/58     | 1/2" NPT |
| 1/4 x 1/2/8 x 15 | PVDF             | 3.0/76 | 1/4" NPT   | 2.25/57    | .35/9      | 2.0/51     | 2.0/51     | 1/2" NPT |

Dimensions are subject to change without notice – consult factory for installation information



Hayward is a registered trademark  
of Hayward Industries, Inc.  
© 2015 Hayward Industries, Inc.

Contact Hayward Flow Control with questions: **USA:** 1-888-429-4635 • Fax: 1-888-778-8410 • One Hayward Industrial Drive • Clemmons, NC 27012 USA  
**Canada:** 1.888.238.7665 • Fax: 1.905.829.3636 • 2880 Plymouth Drive • Oakville, ON L6H 5R4 Canada • Email: hflowcanada@haywardnet.com  
Visit us at: www.haywardflowcontrol.com • E-mail: hflow@haywardnet.com