



AV Series Angle Globe Valves

1/4" TO 2" PVC

KEY FEATURES

- PVC
- Space Saving 90° Body
- Panel Mount Lugs on 1/4" Size
- Fine Pitch Stem Threads for Precision Adjustment
- Reliable Globe Valve Design
- Perfect for Throttling and Changing Flow Direction

OPTIONS

- Flanged Ends

MATERIALS

- PVC Cell Class 12454 per ASTM D1784
- CPVC Cell Class 23447 per ASTM D1784
- FPM O-Ring Seals

TECHNICAL INFORMATION

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/4" – 2" (DN8 – DN50)	PVC	Threaded or Flanged	FPM	150 PSI @ 70°F Non-Shock


AV Series Angle Globe Valves

1/4" TO 2" PVC

TECHNICAL INFORMATION, CONTINUED

PARTS LIST

1. Stem
2. Bonnet
3. Piston
4. Body
5. O-Ring

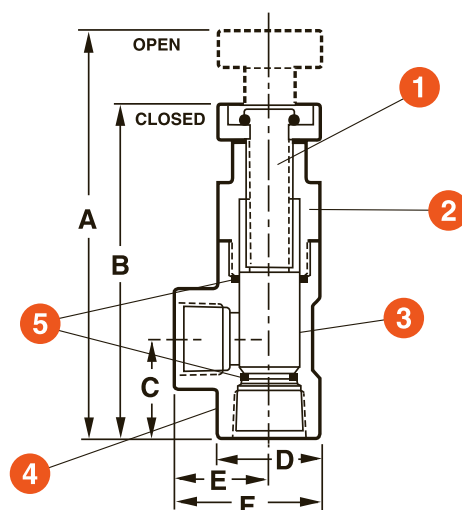

DIMENSIONS

SIZE in/DN	A in/mm	B in/mm	C in/mm	D in/mm	E in/mm	F in/mm	WEIGHT lb/kg
1/4/8	3.63/92	3.19/81	1.06/27	1.00/25	.88/22	1.38/35	.13/.06
1/2/15	5.88/149	4.94/125	1.50/38	1.38/35	1.44/37	2.06/52	.38/.17
3/4/20	6.38/162	5.19/132	1.88/48	1.56/40	1.63/41	2.44/62	.50/.23
1/25	7.44/189	6.19/157	2.06/52	1.94/49	1.94/49	2.75/70	.63/.29
1-1/2/40	10.25/260	8.31/211	2.63/67	2.63/67	2.44/62	3.75/95	1.75/.80
2/50	11.81/300	9.44/240	3.00/76	3.13/80	2.88/73	4.44/113	2.63/1.19

Dimensions are subject to change without notice – consult factory for installation information

Cv VALUES


SIZE in/DN	Cv VALUES
1/4/8	1.0
1/2/15	5.0
3/4/20	10.0
1/25	16.0
1-1/2/40	45.0
2/50	70.0

PRESSURE LOSS CALCULATION FORMULA

$$\Delta P = \left[\frac{Q}{C_v} \right]^2$$

ΔP = Pressure Drop
 Q = Flow in GPM
 C_v = Flow Coefficient

OPERATING TEMPERATURE/PRESSURE

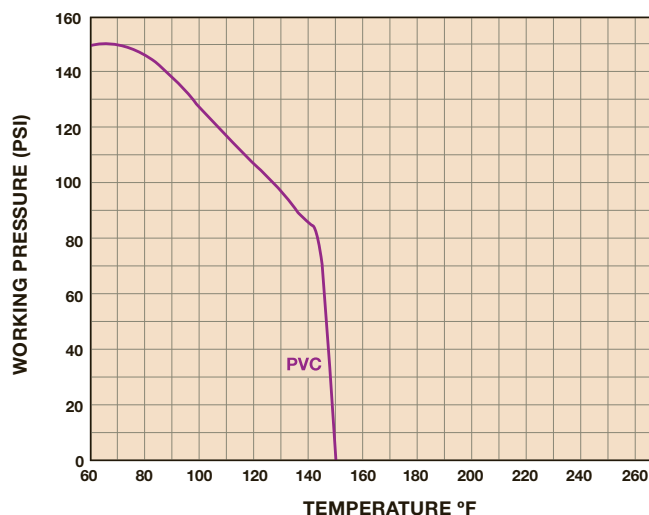

Hayward is a registered trademark
of Hayward Industries, Inc.
© 2015 Hayward Industries, Inc.

Contact Hayward Flow Control with questions: **USA:** 1-888-429-4635 • Fax: 1-888-778-8410 • One Hayward Industrial Drive • Clemmons, NC 27012 USA
Canada: 1.888.238.7665 • Fax: 1.905.829.3636 • 2880 Plymouth Drive • Oakville, ON L6H 5R4 Canada • Email: hflowcanada@haywardnet.com
 Visit us at: www.haywardflowcontrol.com • E-mail: hflow@haywardnet.com