



BVX Series Ready Flanges

1" TO 4" PVC, CPVC AND GFPP

KEY FEATURES

- PVC, CPVC and GFPP
- One-Piece Construction
- Integral Molded Nipple
- Eliminates the Need for an Extra Fabricated Joint – Preventing a Possible Leak Path
- Easily Converts Socket Valves to Flanged
- ANSI Class 150 Bolt Pattern


OPTIONS

- Threaded to Flanged

MATERIALS

- PVC Cell Class 12454 per ASTM D1784
- CPVC Cell Class 23447 per ASTM D1784
- GFPP Cell Class 85580 per ASTM D4101

TECHNICAL INFORMATION

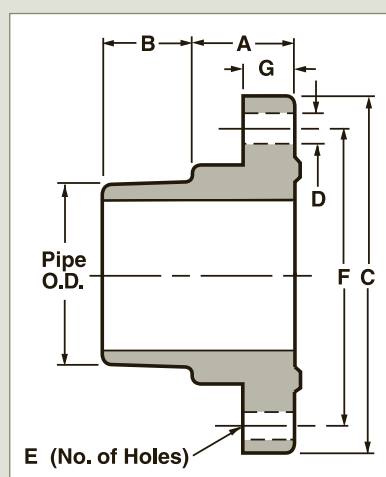

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	PRESSURE RATING
1" – 4" (DN25 – DN100)	PVC and CPVC	Spigot x Flanged	150 PSI @ 70°F Non-Shock
	GFPP	Threaded x Flanged	

DIMENSIONS

SIZE in/DN	A in/mm	B in/mm	C in/mm	D in/mm	E in/mm	F in/mm	G in/mm	WEIGHT lbs/kg
1/25	1.25/32	1.19/30	4.50/114	.56/14	4.00/102	3.13/80	.56/14	.50/.23
1-1/2/40	1.50/38	1.44/37	5.00/127	.56/14	4.00/102	3.88/99	.75/19	.75/.34
2/50	1.65/42	1.54/39	6.00/152	.75/19	4.00/102	4.75/121	.75/19	1.25/.57
3/80	1.98/50	1.84/47	7.50/191	.75/19	4.00/102	6.00/152	1.00/25	2.75/1.25
4/100	2.36/60	2.31/59	9.00/229	.75/19	8.00/203	7.50/191	1.13/29	4.50/2.04

Dimensions are subject to change without notice – consult factory for installation information