


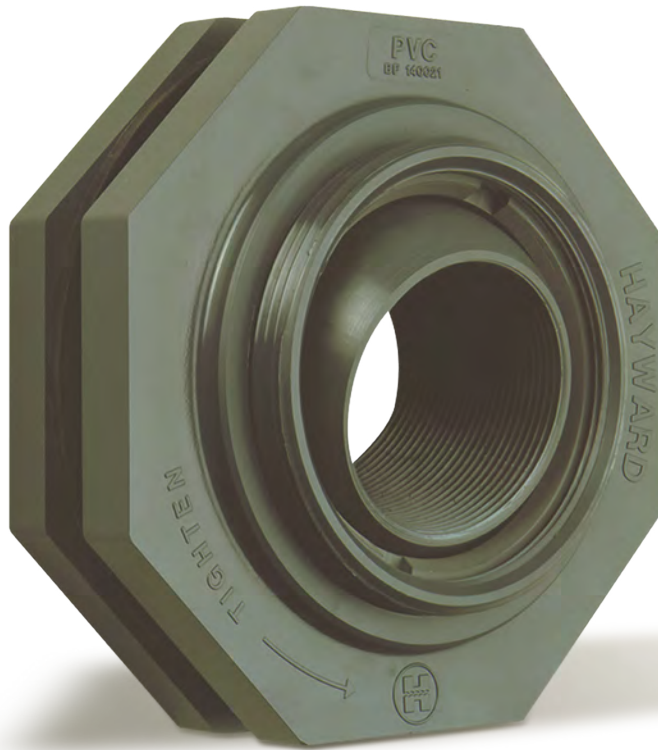

SF Series Self-Aligning Bulkhead Fittings

1", 2" AND 3" PVC

KEY FEATURES

- PVC
- Enables Easy Piping Connections to Domed Tanks
- Swivel Ball Connection Corrects for Curved Tanks
- Enables Straight Pipe Connections up to 27° of Offset Angle
- PTFE Ball Seat
- FPM or EPDM Gasket

TECHNICAL INFORMATION

ALTERNATE VIEW



SELECTION CHART

SIZE	MATERIAL	END CONNECTION	GASKETS	PRESSURE RATING
1" 2" and 3" (DN25, DN50 and DN80)	PVC	Thread x Thread	FPM or EPDM	75 PSI @ 70°F Non-Shock


SF Series Self-Aligning Bulkhead Fittings

1", 2" AND 3" PVC

TECHNICAL INFORMATION, *CONTINUED*

MINIMUM INSIDE DIAMETERS OF TANKS FOR BULKHEAD FITTING INSTALLATION

SIZE in/DN	Min. Rigid Tank ID	Min. Flexible Tank ID
1/25	25.75"	19.38"
2/50	42.50"	36.25"
3/80	90.00"	76.81"

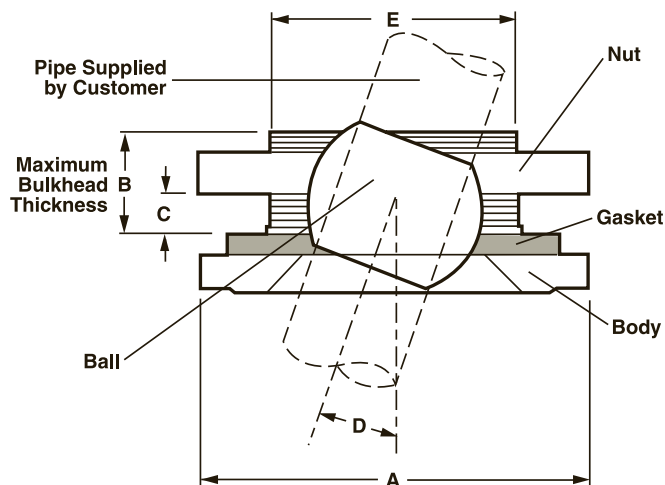


DIMENSIONS

SIZE in/DN	A in/mm	B in/mm	C in/mm	D angle	E in/mm	WEIGHT lbs/kg
1/25	4.38/111	2.00/51	1.25/32	27°	3.25/83	1.90/.86
2/50	6.00/152	2.00/51	1.06/27	25°	4.50/114	4.80/2.18
3/80	8.75/222	2.50/64	1.25/32	20°	5.75/146	11.10/5.03

Dimensions are subject to change without notice – consult factory for installation information

OPERATING TEMPERATURE/PRESSURE

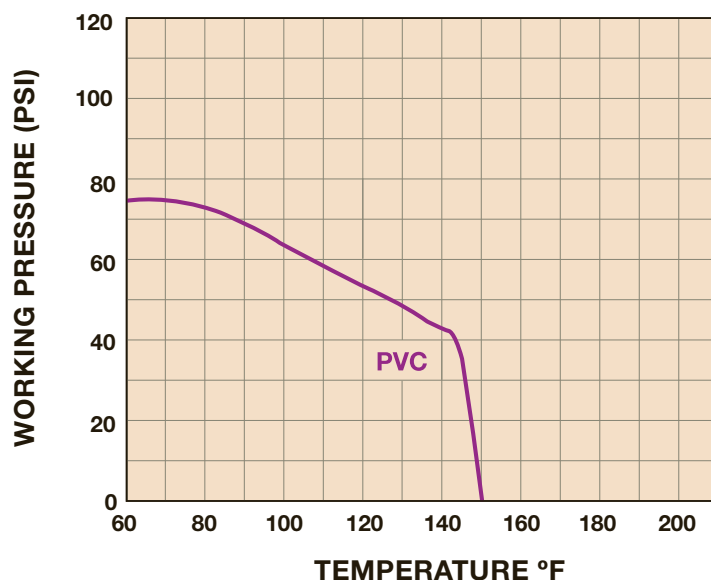

Hayward is a registered trademark
of Hayward Industries, Inc.
© 2015 Hayward Industries, Inc.

Contact Hayward Flow Control with questions: **USA:** 1-888-429-4635 • Fax: 1-888-778-8410 • One Hayward Industrial Drive • Clemmons, NC 27012 USA
Canada: 1.888.238.7665 • Fax: 1.905.829.3636 • 2880 Plymouth Drive • Oakville, ON L6H 5R4 Canada • Email: hflowcanada@haywardnet.com
Visit us at: www.haywardflowcontrol.com • E-mail: hflow@haywardnet.com