Location:

SYMMONS® Safetymix®

Shower System with Hand Shower 1-117-FS

Specification Submittal



Feature Highlights

- Symmons tub and shower system with a lever handle
- Symmons Safetymix pressure balancing mixing valve with adjustable stop screw to limit handle turn
- Super showerhead, single mode with adjustable flood or mist spray, #4-231
- Lever diverter with volume control for showerhead and hand shower, #2DIV-BODY
- Open-Flo wall/hand shower, with flexible 5 foot metal hose and inline vacuum breaker, #FS
- Wall hook for mounting hand shower
- Standard flow rate 2.5 gpm (9.5 L/min)
- Polished chrome finish

Model Numbers

☐ 1-117-FS Shower System with Hand Shower and Symmons Safetymix pressure balancing mixing valve.

Finish Options

Append appropriate -suffix to model number

\- Polished chrome finish (standard)

Standards / Certifications

ASME A112.18.1/CSA B125.1

Warranty


- Limited Lifetime - to the original end purchaser in residential/consumer installations.
- 5 years - for commercial installations

Options / Modifications

Append appropriate -suffix to model number.

☐	CG -1.5	1.5 gpm (5.7 L/min) flow restrictor
☐	-2.0	2.0 gpm (7.6 L/min) flow restrictor
☐	-72	72" hose in place of 60" hose
☐	-ADAHS	1 mode white hand shower unit with non-positive shut-off button in place of standard hand shower unit
☐	-B30	30" adjusting bar in place of wall hook
☐	-B48	48" adjusting bar in place of wall hook
☐	-BX	Back connection with integral stops
☐	-E	External volume control on showerhead
☐	-G	Dial thermometer
☐	-NU	NU-Arm head bracket in place of 300 arm and flange
☐	CG -NS	Non-shared diverter valve
☐	-QD	Quick disconnect
☐	-R	72" white vinyl hose in place of 60" metal hose
☐	-VB	Elevated vacuum breaker with wall flanges in place of in-line vacuum breaker
☐	-VP	Vandal resistant escutcheon screws in place of standard screws
☐	-X	Integral stops - allows water shut off at valve for service. Recommended for use on all multiple commercial installations
☐	-X-3/4"	3/4" valve to increase flow approximately 20%
☐	-X-CHKS	Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve

Dimensions *Safetymix Tub and Shower System, 1-117-FS*

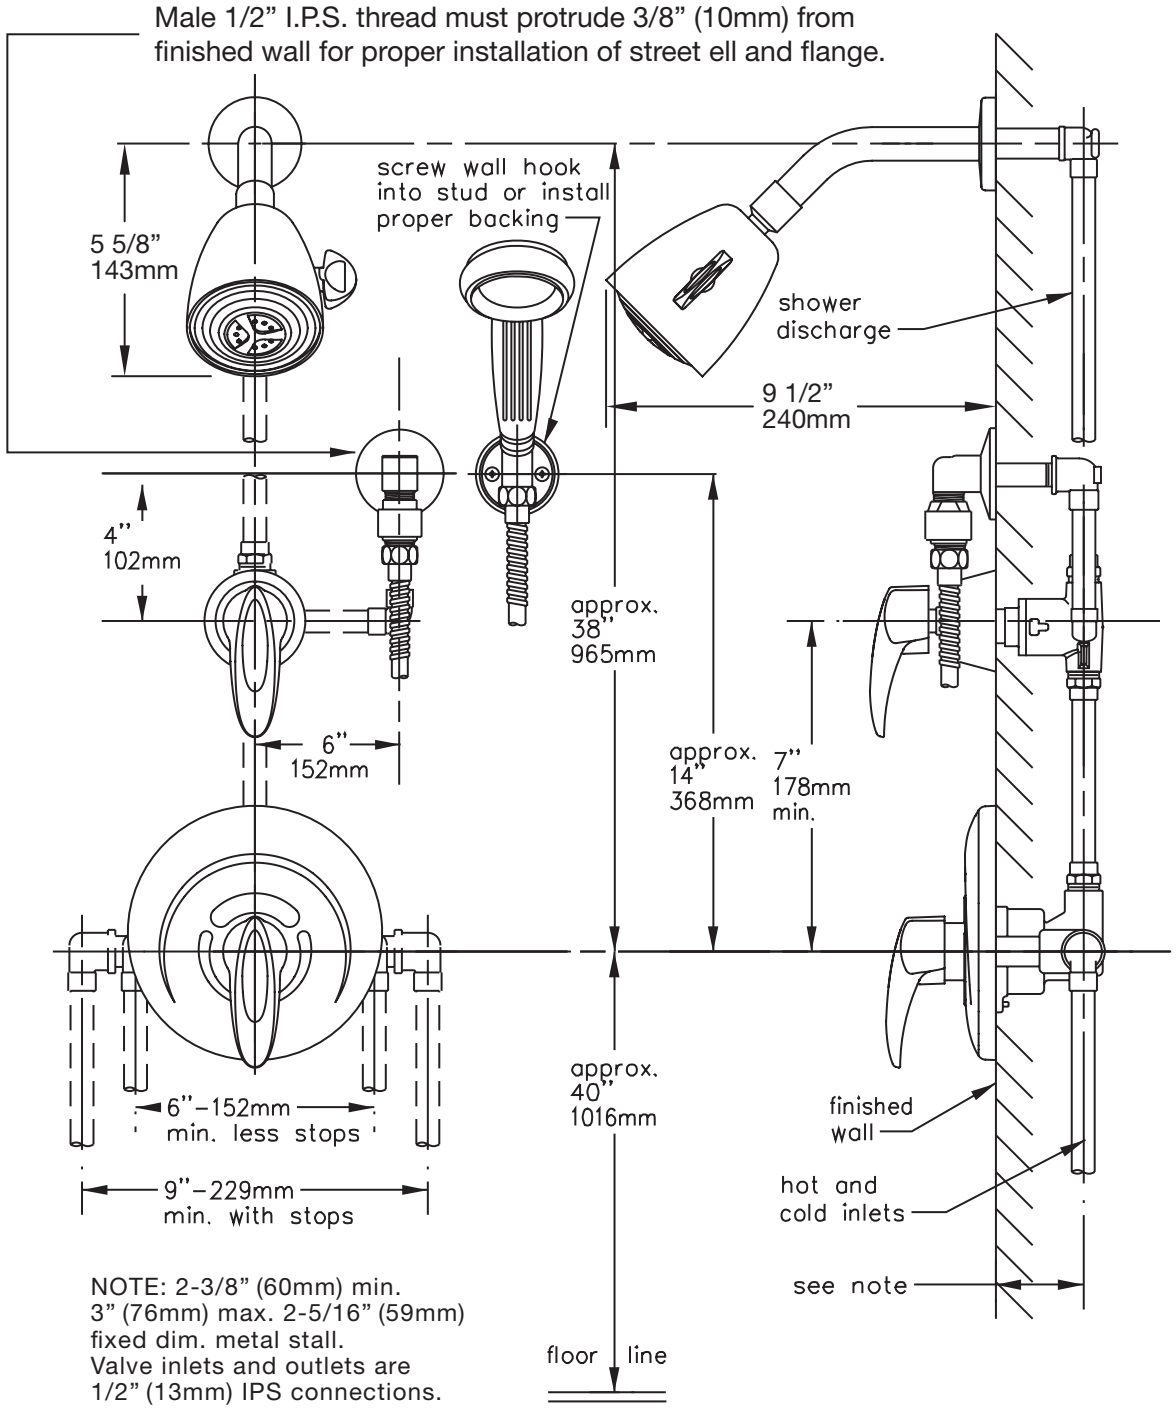

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184
Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Website: symmons.com ▪ Email: gethelp@symmons.com

SYMMONS®
the smart choice™

Copyright © 2017 Symmons Industries, Inc. ▪ ZV-1449 REV B ▪ 013117