

PIPE STRAPS



FUNCTION: Designed to hold pipe flush with mounting surface.

APPROVALS: Complies with Federal Specifications A-A-1192A (Type 26) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 26).

MATERIAL: Low carbon steel


FINISH: Plain or electro-galvanized

ORDERING: Specify pipe size and figure number.

**Fig. 830
SHORT
PIPE STRAP**

Available in stainless steel.
To order, specify 304 or 316 and add
suffix SS to figure number.
Price on request.

Pipe Size		B		C		D		E		Hole Size		Max. Rec. Load		Wt. Each	
												lbs.	kN	lbs.	Kg
1/2	(15)	37/8	(98.43)	5/16	(7.94)	27/8	(73.03)	15/16	(23.81)	7/16	(11.11)	300	(1.33)	0.25	(.11)
3/4	(20)	41/16	(103.19)	7/16	(11.11)	31/16	(77.79)	11/8	(28.58)	7/16	(11.11)	300	(1.33)	0.27	(.12)
1	(25)	45/16	(109.54)	9/16	(14.29)	35/16	(84.14)	13/8	(34.93)	7/16	(11.11)	300	(1.33)	0.29	(.13)
1 1/4	(32)	411/16	(119.06)	11/16	(17.46)	311/16	(93.66)	15/8	(41.28)	7/16	(11.11)	300	(1.33)	0.33	(.15)
1 1/2	(40)	415/16	(125.41)	13/16	(20.64)	315/16	(100.01)	2	(50.80)	7/16	(11.11)	300	(1.33)	0.35	(.16)
2	(50)	51/2	(139.70)	15/16	(23.81)	41/2	(114.30)	21/4	(57.15)	7/16	(11.11)	300	(1.33)	0.41	(.19)
2 1/2	(65)	6	(152.40)	13/16	(30.16)	5	(127.00)	27/8	(73.03)	7/16	(11.11)	500	(2.22)	0.89	(.40)
3	(80)	65/8	(168.28)	11/2	(38.10)	55/8	(142.88)	31/2	(88.90)	7/16	(11.11)	500	(2.22)	1.06	(.48)
3 1/2	(90)	71/8	(180.98)	13/4	(44.45)	61/8	(155.58)	4	(101.60)	7/16	(11.11)	500	(2.22)	1.23	(.56)
4	(100)	83/8	(212.73)	2	(50.80)	71/8	(180.98)	41/2	(114.30)	9/16	(14.29)	500	(2.22)	1.58	(.72)

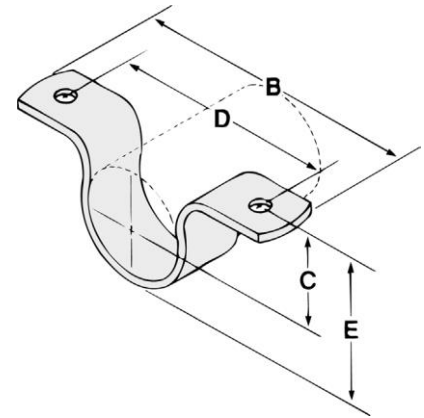

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.