

THREADED ACCESSORIES




FUNCTION: Designed for attaching hanger rod to various types of attachments. Allows a 1" (25.4mm) vertical adjustment of the rod. Frequently used in conjunction with Fig. 630 malleable iron beam clamp.

ORDERING: Specify rod size and figure number.

Fig. 25
EXTENSION PIECE

Rod Size A	For Pipe Sizes		B		C		D	
$\frac{3}{8}$	$\frac{1}{2}$ to 2	(15 to 50)	$\frac{1}{2}$	(12.7)	$\frac{1}{2}$	(12.7)	$1\frac{1}{4}$	(31.75)
$\frac{1}{2}$	$2\frac{1}{2}$ to $3\frac{1}{2}$	(65 to 90)	$\frac{1}{2}$	(12.7)	$\frac{5}{8}$	(15.88)	$1\frac{3}{8}$	(34.93)
$\frac{5}{8}$	4 & 5	(100 & 125)	$\frac{1}{2}$	(12.7)	$\frac{5}{8}$	(15.88)	$1\frac{1}{2}$	(38.1)
$\frac{3}{4}$	6 & 8	(150 & 200)	$\frac{1}{2}$	(12.7)	$\frac{5}{8}$	(15.88)	$1\frac{3}{4}$	(44.45)
$\frac{7}{8}$	10 & 12	(250 & 300)	$\frac{9}{16}$	(14.29)	$\frac{3}{4}$	(19.05)	$1\frac{7}{8}$	(47.63)

Rod Size A	E		F		G		Max. Rec. Load		Wt. Each	
							lbs.	kN	lbs.	kg
$\frac{3}{8}$	$2\frac{1}{16}$	(52.39)	$\frac{9}{16}$	(14.29)	$1\frac{1}{4}$	(31.75)	730	(3.25)	.20	(.09)
$\frac{1}{2}$	$2\frac{5}{16}$	(58.74)	$\frac{11}{16}$	(17.46)	$1\frac{3}{8}$	(34.93)	1350	(6.01)	.43	(.20)
$\frac{5}{8}$	$2\frac{7}{16}$	(61.91)	$\frac{3}{4}$	(19.05)	$1\frac{7}{16}$	(36.51)	1550	(6.89)	.46	(.21)
$\frac{3}{4}$	$2\frac{7}{8}$	(73.03)	$\frac{7}{8}$	(22.23)	$1\frac{11}{16}$	(42.86)	2100	(9.34)	.63	(.29)
$\frac{7}{8}$	3	(76.2)	$\frac{7}{8}$	(22.23)	$1\frac{3}{4}$	(44.45)	2350	(10.45)	.67	(.30)

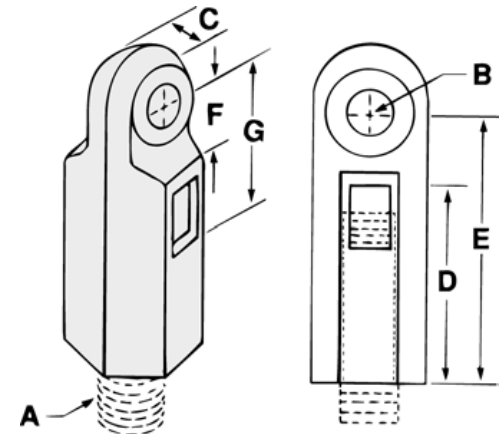

MATERIAL: Malleable iron
FINISH: Plain or electro-galvanized

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.