





CADDY® PYRAMID

Rooftop Equipment Support

Part Number	Article Number	Description	H1 in[mm]	H2 in[mm]	L1 in[mm]	L2 in[mm]	L3 in[mm]	W1 in[mm]	W2 (Max) in[mm]	W3 (Max) in[mm]	Weight lbs[Kg]	F* lbs[N]
PEB	360425	Height Adjustable Support Post	12 [305]	18 [457]	12 [305]	N/A	N/A	12 [305]	N/A	N/A	8.6 [3.9]	750 [3340]
PEK4B	360426	4 Post Equipment Support	12 [305]	18 [457]	12 [305]	48.5 [1232]	62.5 [1588]	12 [305]	42 [1067]	49.5 [1257]	78.5 [35.6]	1120 [4980]**
PEK6B	360427	6 Post Equipment Support	12 [305]	18 [457]	12 [305]	48.5 [1232]	62.5 [1588]	12 [305]	78 [1981]	85.5 [2172]	122.4 [55.5]	2240 [9960]**
PEKEF	360493	2 Post Extension Kit	12 [305]	18 [457]	12 [305]	48.5 [1232]	62.5 [1588]	12 [305]	N/A	N/A	61.3 [27.8]	1120 [4980]**

*F represents maximum total static load.

**Adjust maximum load as needed based on the load tables below.

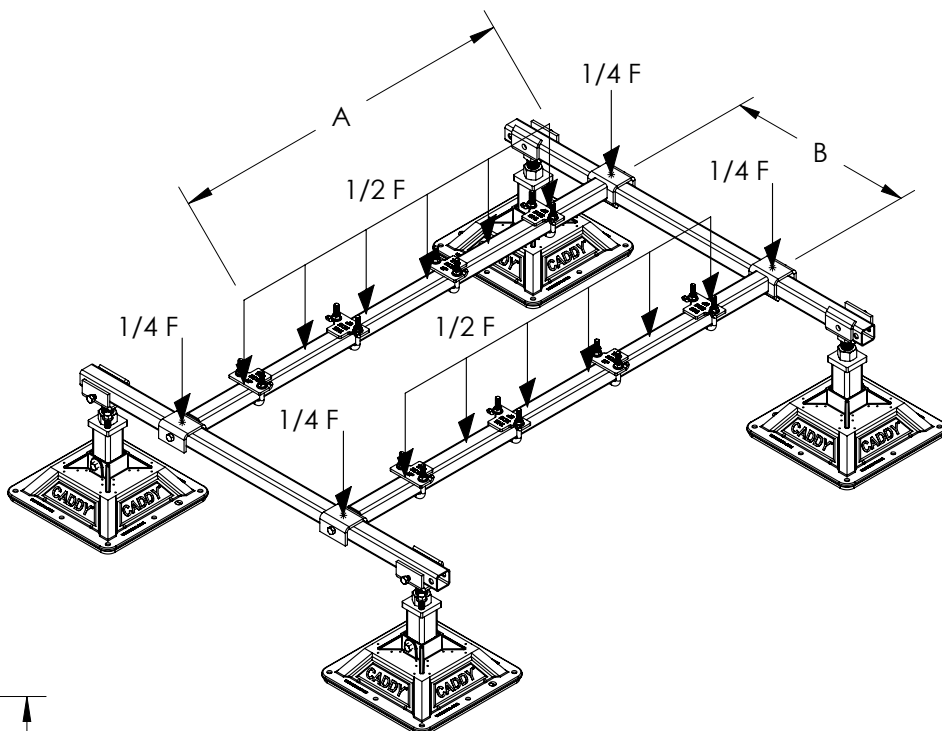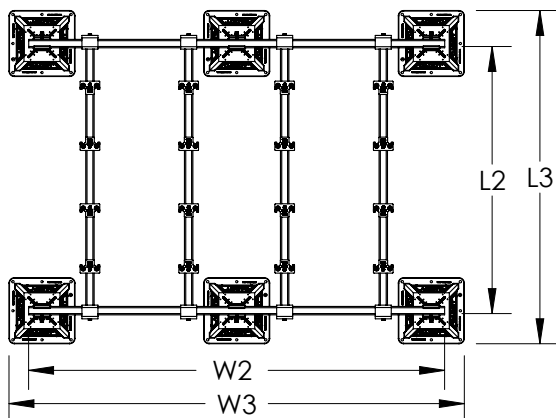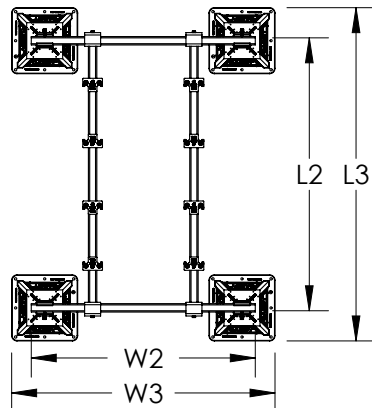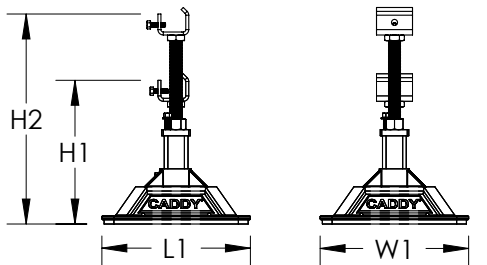

Max Load lbs[N]	A in[mm]
725 [3225]	12 [305]
790 [3510]	24 [610]
915 [4070]	36 [915]
1120 [4980]	48 [1220]

Max Load lbs[N]	B in[mm]
790 [3510]	<15 [380]
1120 [4980]	>15 [380]

*Max distance (B) = 33 in [840 mm]

*Load must be stable and spread evenly across frame.

*The roof must be able to support the point loads at the base feet.

WARNING:

1. ERICO products shall be installed and used only as indicated in ERICO product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative.
2. ERICO products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.
5. Products that are manufactured using spring steel components shall be used only in a non-corrosive indoor environment.
6. All pipe supports, hangers, intermediate components and structural attachments must ONLY be used as described herein and are NEVER to be used for any other purpose.

NOTE: All load ratings are for static conditions and do not account for dynamic loading such as wind, water or seismic loads, unless otherwise noted.

The customer is responsible for:

- a. Conformance to all governing codes.
- b. The integrity of structures to which the products are attached, including their capability of safely accepting the loads imposed, as evaluated by a qualified engineer.
- c. Using appropriate industry standard hardware as noted above.

SAFETY INSTRUCTIONS:

All governing codes and regulations and those required by the job site must be observed. Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.



CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

TECHNICAL SUPPORT:
www.erico.com

CFS471_D

1 OF 4


© 2012, 2013 ERICO International Corporation.





CADDY® PYRAMID

Rooftop Equipment Support

Contents for PEK4B

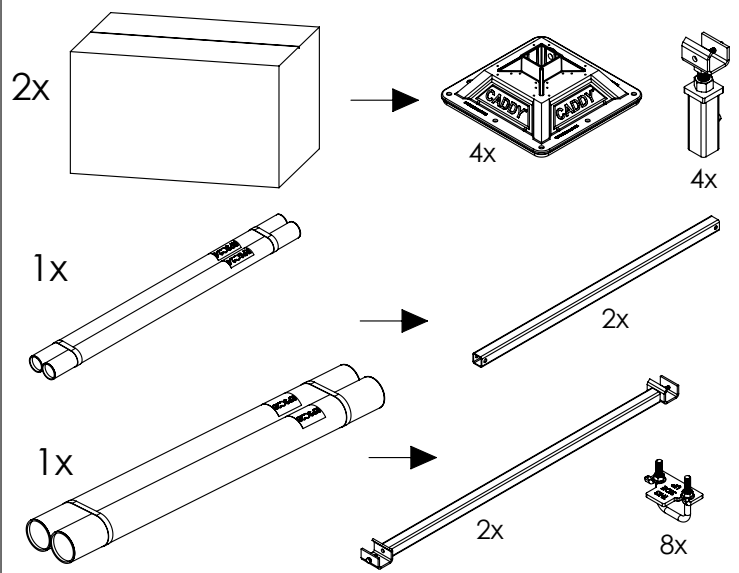

Contents for PEK6B

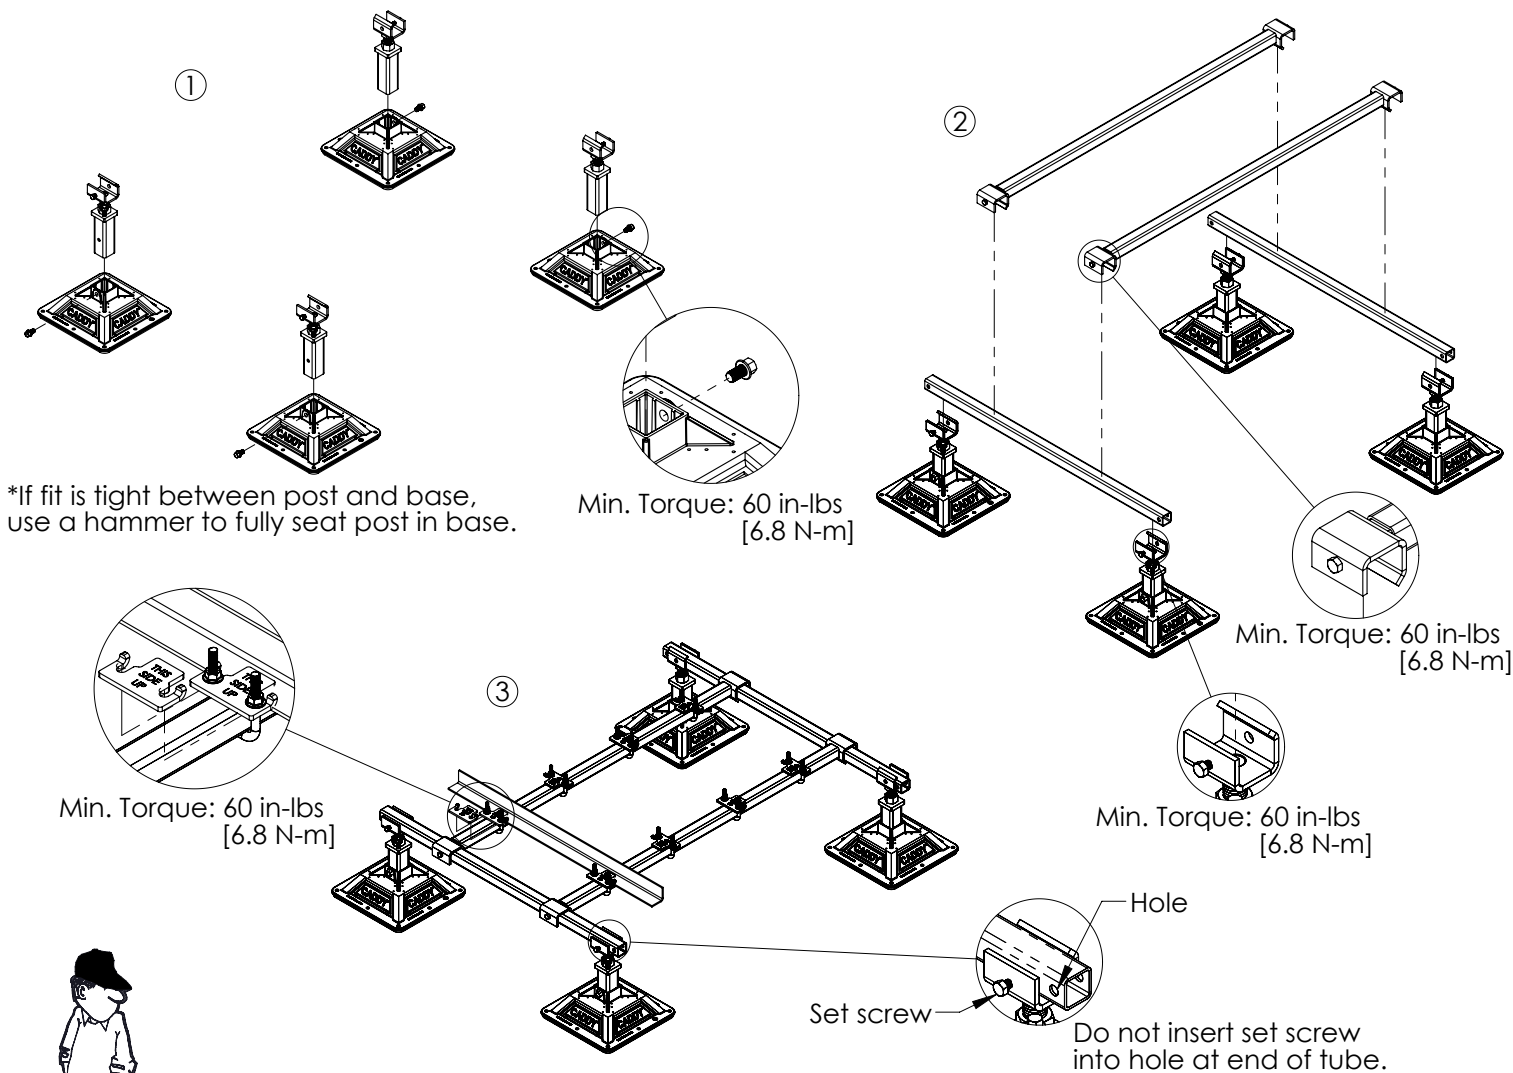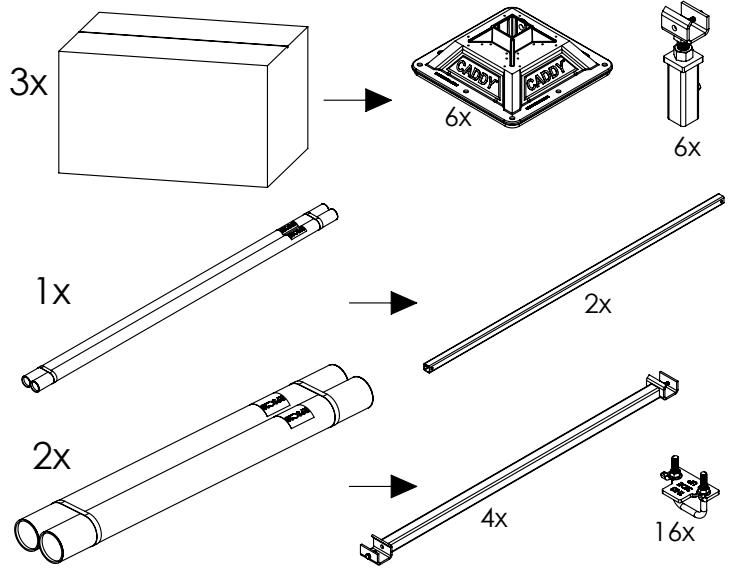

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

TECHNICAL SUPPORT:
www.erico.com

CFS471_D


2 OF 4

© 2012, 2013 ERICO International Corporation.

ERICO®


Exploded view diagram of the LED strip assembly components and their quantities:

- 1x LED strip (top left)
- 2x LED strip connector (top middle)
- 2x LED strip connector (top right)
- 1x LED strip (middle left)
- 2x LED strip (middle right)
- 1x LED strip (bottom left)
- 2x LED strip (bottom right)
- 8x LED strip connector (bottom right)




Join the ends of the PEK4B or PEK6B (not shown) and PEKEF. Secure with bolts. Min. torque: 16 ft-lbs [21.7 Nm]


- ① Remove bases

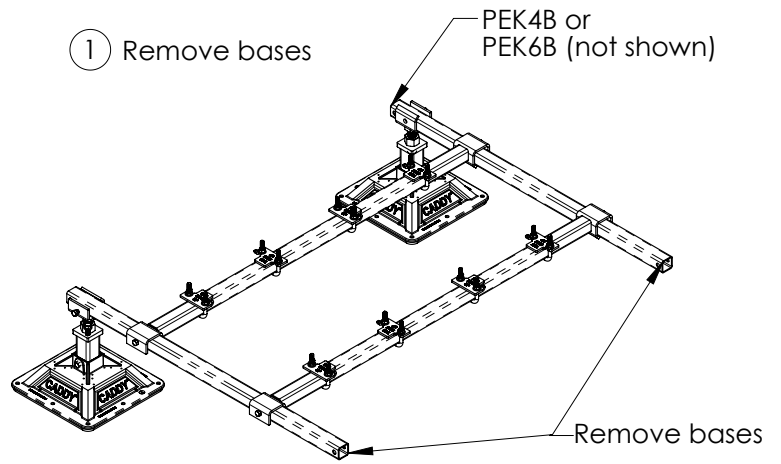

- ② Install extension frame PEKEF

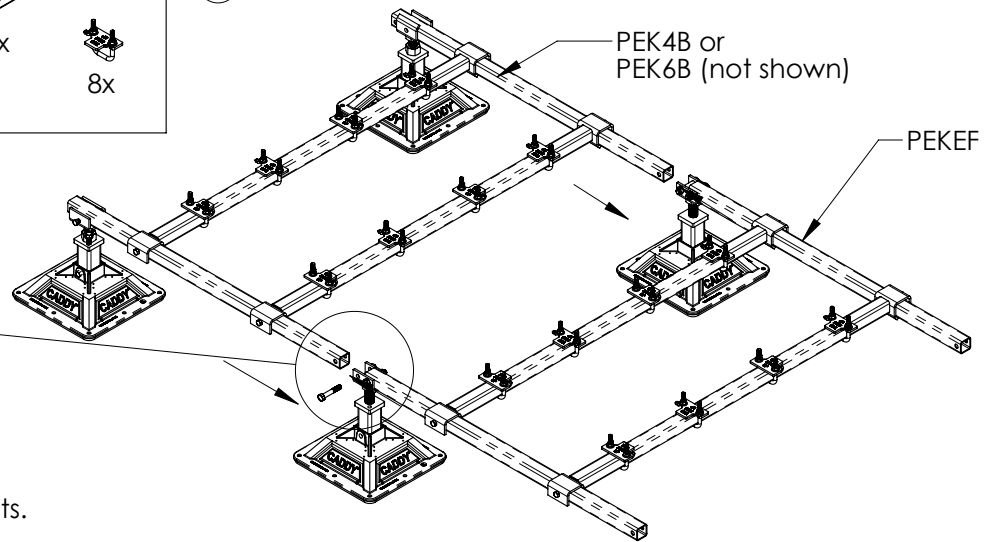

- ③

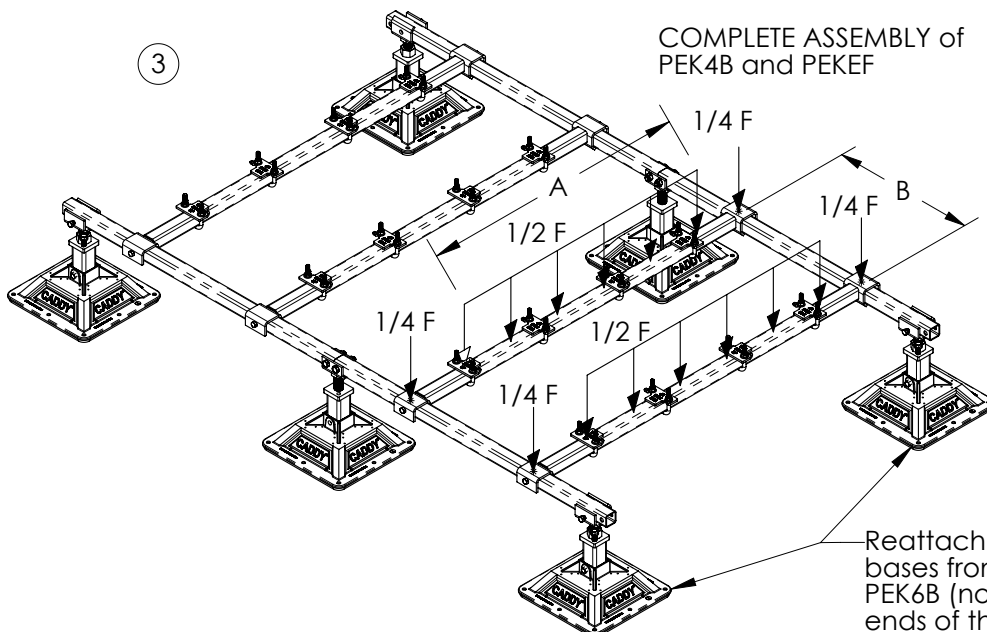

COMPLETE ASSEMBLY of
PEK4B and PEKEF

- Reattach the removed bases from the PEK4B or PEK6B (not shown) to the ends of the PEKEE.



CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

3 OF 4

© 2012, 2013 ERICO International Corporation.


ERICO®

CADDY® PYRAMID

Rooftop Equipment Support with Strut (Strut not included)

Part Number	Article Number	Description	H1 in[mm]	H2 in[mm]	L1 in[mm]	W1 in[mm]	Weight lbs[N]	F* lbs[N]
PEB	360425	Height Adjustable Support Post	12 [305]	18 [457]	12 [305]	12 [305]	8.6 [38.3]	750 [3340]

*F represents maximum total static load per base.

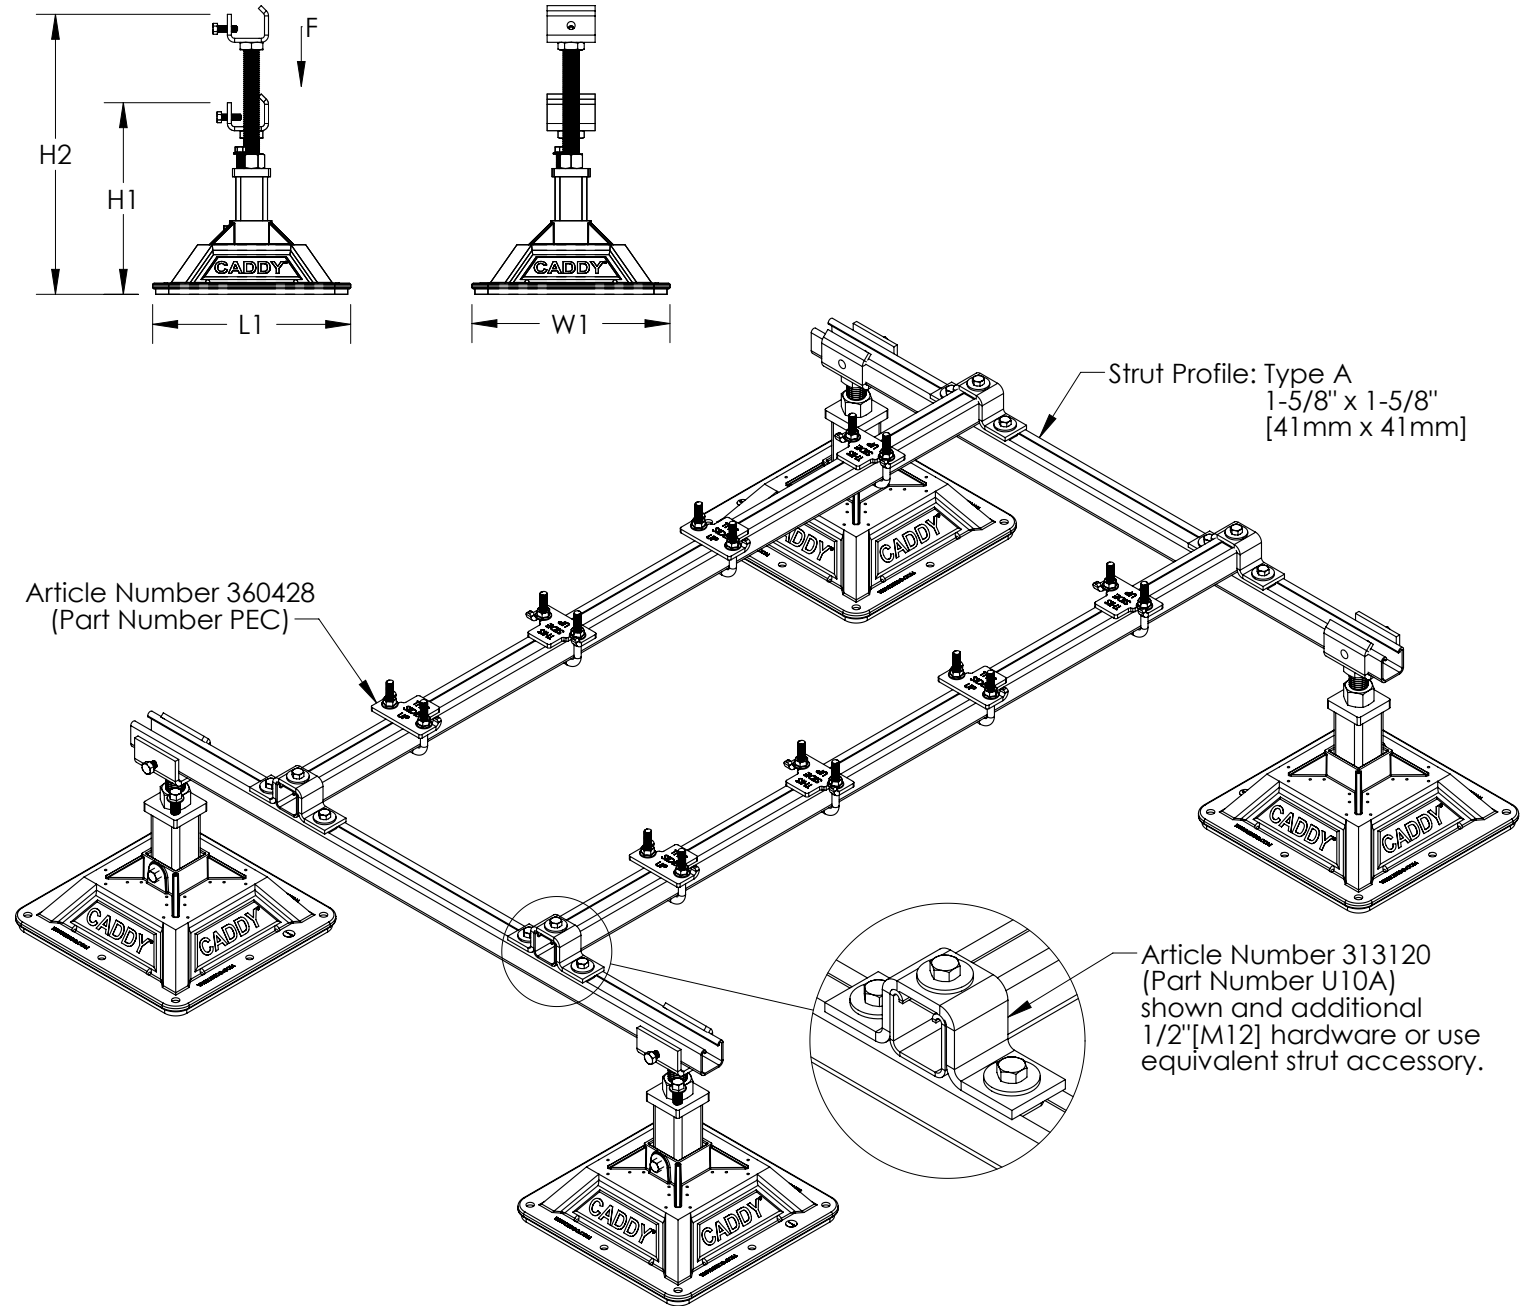

*For strut load ratings, consult the ERICO parts catalog.



CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

TECHNICAL SUPPORT:
www.erico.com

CFS471_D

4 OF 4

© 2012, 2013 ERICO International Corporation.

ERICO®