




DZR Brass Female Sweat X PEX Adapter QQ__DZX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

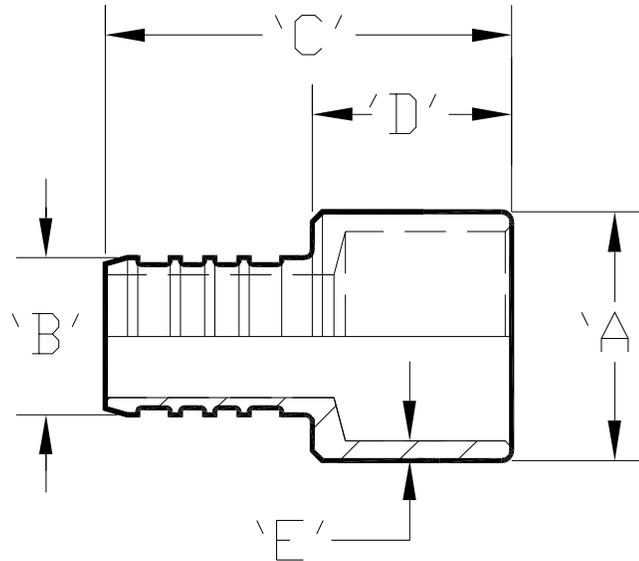

Part Number	Description	'A'	'B'	'C'	'D'	'E'
QQ812DZX	1-1/4" Female Sweat x 1-1/4" PEX Barb	1.58" [40.1]	1.045" [26.5]	2.22" [55.9]	1.07" [27.2]	0.10" [2.5]
QQ950DZX	1-1/2" Female Sweat x 1-1/2" PEX Barb	1.87" [47.5]	1.233" [31.3]	2.37" [68.2]	1.22" [31.0]	0.12" [3.0]

Engineering Specification: ZurnPEX[®] DZR brass female sweat x ZurnPEX[®] adapter. The QQ__DZX adapter solders directly to copper tubing. The outer diameter of the QQ__X contains two grooves for easy identification. Large diameter fittings are made with dezincification resistant brass. These fittings, as a system with Zurn PEX[®] tubing, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5.

Accessories

- ___ **QCR6X** 1-1/4" Copper Crimp Ring
- ___ **QCR7X** 1-1/2" Copper Crimp Ring

Rev.	Date: 06/20/08	C.N. No. 98657
Dwg. No. 83807	Prod. No. QQ__DZX	