




# Zurn PEX® XL-Low Lead Brass UL 1821 Listed Barb x FPT Non Swivel Adapter - QQUFC55GFX Specification Sheet

Tag \_\_\_\_\_

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

Note: Barb geometry will vary depending upon barb size.

Note: Head geometry will vary depending upon barb size.

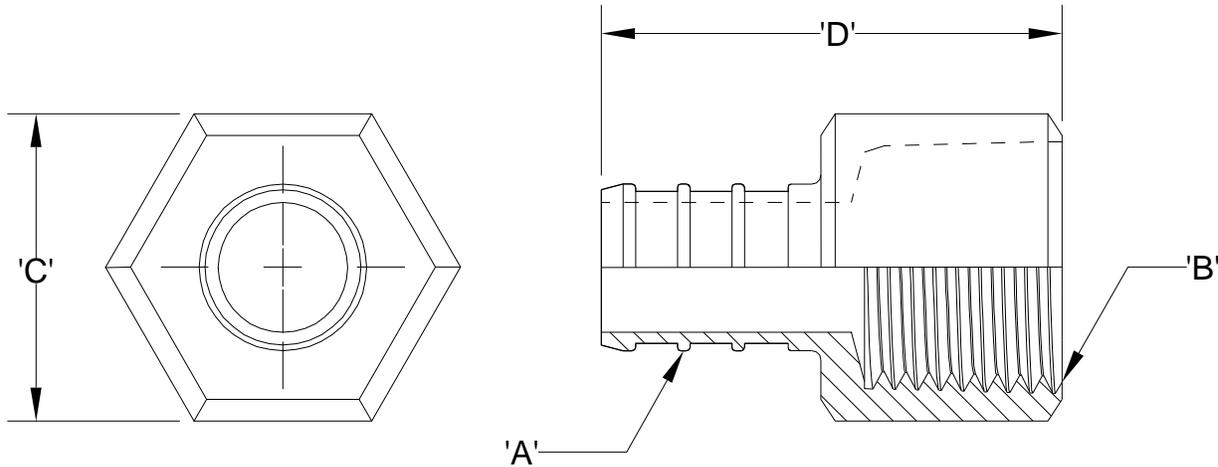

Part Number	Description	'A'	'B'	'C'	'D'
QQUFC55GFX	1" Barb x 1" FPT Non Swivel Adapter	1" Barb	1"-11.5" NPT	1.41" [35.8]	1.67" [42.4]

**Engineering Specification:** Zurn PEX® XL-Low Lead Brass Barb x FPT Non Swivel Adapter. Used to connect PEX tubing to a male pipe thread. Manufactured from EcoBrass®. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 130 PSI at 120°F (fire protection rating), 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61 including Annex G, ASTM F877, CSA B137.5, ASTM F1807, and UL 1821.

**Accessories**

- \_\_\_ QCLP5X 1" QuickClamp® Crimp Ring
- \_\_\_ QCR5X 1" Copper Crimp Ring

Rev.	Date: 10/08/10	C.N. No.111817
Dwg. No. 302758	Prod. No. QQUFC55GFX	