




Manifold Memory Balancing Valve – QHBBV

Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

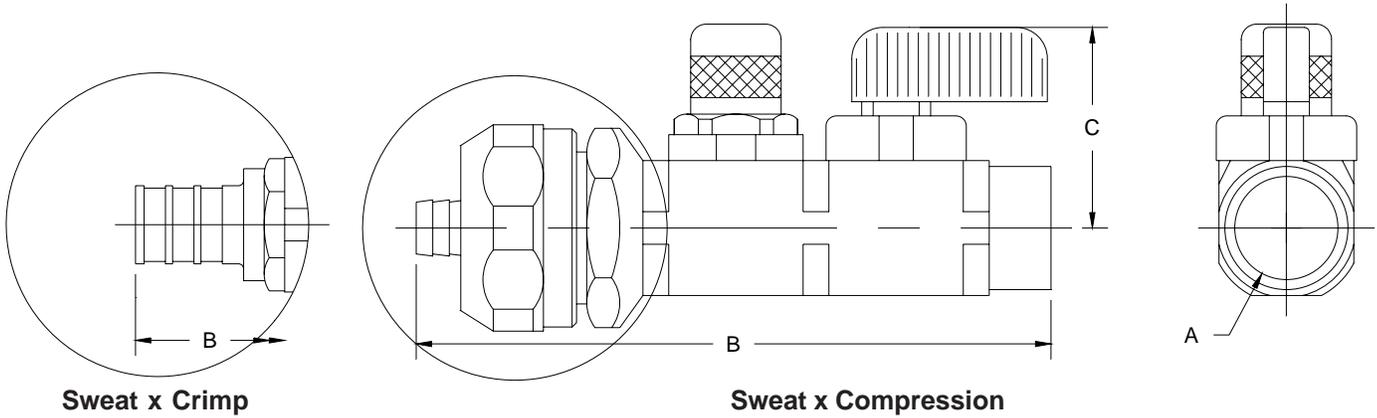

Part Number	Description	A	B**	C**
QHBBV32	1/2" Sweat x 3/8" PEX Compression	1/2" [13]	4-1/4" [108]	1-1/4" [32]
QHBBV33	1/2" Sweat x 1/2" PEX Compression	1/2" [13]	4-1/4" [108]	1-1/4" [32]
QHBBV4J	3/4" Sweat x 5/8" PEX Compression	3/4" [19]	4-1/2" [114]	1-3/8" [35]
QHBBV44	3/4" Sweat x 3/4" PEX Compression	3/4" [19]	4-1/2" [114]	1-3/8" [35]
QHBBV32X	1/2" Sweat x 3/8" Qick/Sert I Crimp*	1/2" [13]	3-13/16" [97]	1-1/4" [32]
QHBBV33X	1/2" Sweat x 1/2" Qick/Sert I Crimp*	1/2" [13]	3-7/8" [98]	1-1/4" [32]
QHBBV44X	3/4" Sweat x 3/4" Qick/Sert I Crimp*	3/4" [19]	4-1/16" [103]	1-3/8" [35]

*Requires Annealed Copper Crimp Ring/QickClamp™ Crimp Ring

**Approximate Length

Engineering Specification: Zurn Manifold Memory Balancing Ball Valve allows individual loop flow control with integral 1/8" Allen key memory spindle when installed on Zurn copper manifolds. The ball valve has a working pressure of 250 PSI and a maximum temperature of 250°F. The ball valve shall have a brass body with integral 1/2" or 3/4" copper sweat connection. Cv ratings are 3.0 for 1/2" sweat valves and 6.0 for 3/4" sweat valves.

Accessories

- ___ **QCLP2X** 3/8" QickClamp™ Crimp Rings
- ___ **QCLP3X** 1/2" QickClamp™ Crimp Rings
- ___ **QCLP4X** 3/4" QickClamp™ Crimp Rings
- ___ **QCR2X** 3/8" Crimp Ring
- ___ **QCR3X** 1/2" Crimp Ring
- ___ **QCR4X** 3/4" Crimp Ring

Rev. B Date: 11/04/08 C.N. No. 99307
Dwg. No. 65997 Prod. No. QHBBV