




Zurn PEX® XL-Low Lead Brass UL 1821 Listed Barb x Female Sweat Adapter - QQ800GFX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

Note: Barb geometry will vary depending upon barb size.

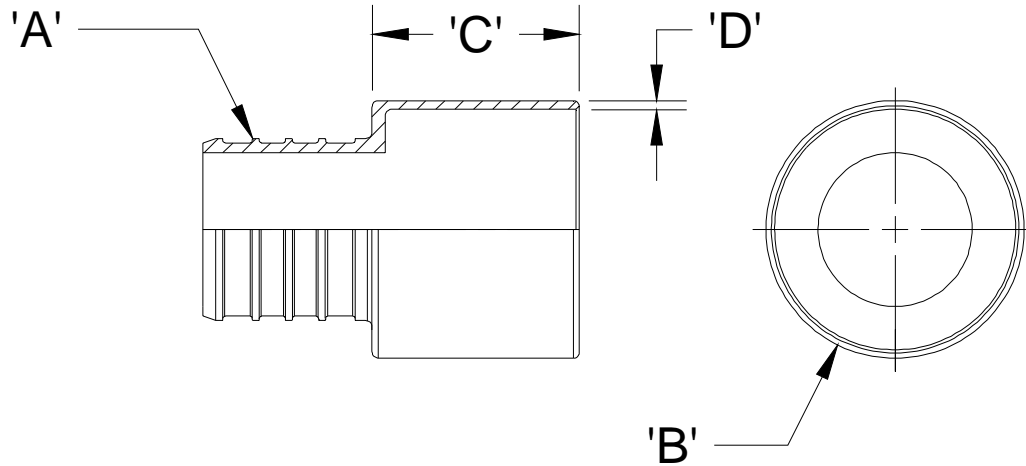

Part Number	Description	'A'	'B'	'C'	'D'
QQ800GFX	1" Female Sweat x 1" Barb	1" Barb	1.21" [30.7]	0.97" [24.6]	0.6" [1.5]

Engineering Specification: Zurn PEX® Female Sweat x Barb Adapter. The QQ800FX adapter solders directly to copper tubing. Manufactured from EcoBrass®. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 130 PSI at 120°F (fire protection rating), 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61 including Annex G, ASTM F877, CSA B137.5, ASTM F1807, and UL 1821.

Accessories

- **QCLP5X** 1" QuickClamp® Crimp Ring
- **QCR5X** 1" Copper Crimp Ring

Rev.	Date: 10/8/10	C.N. No.11813
Dwg. No. 302754		Prod. No. QQ800GFX